

Getting started



During the registration process you have created a CONTA-SUPERVISION company name, dashboard name. In the CONTA-SUPERVISION IoT portal you will find in the right top corner your setting. Here you can find your unique token. With these three parameters you will be able to connect a GSM-PRO2 I/O communication module into the CONTA-SUPERVISION IoT portal.

Important notice! Make sure that you download the latest [setup](#) software and update the GSM-PRO2 to the latest [firmware](#). A firmware update can be executed by sending the sms command FOTAP by an admin user or connect the GSM-PRO2 I/O Communication module via an USB cable to your pc/notebook and upload via the setup software.

When you have downloaded the setup software unpack the zip file and install as administrator. Follow the instruction during the installation process. Once the installation proses has finalised open the setup software and connect the GSM-PRO2 via USB to your PC/notebook or get the configuration Over The Air.


Go to the settings tab in the setup software.



For the use of the CONTA-SUPERVISION IoT portal a data connections is required for the GSM-PRO2. Make sure you have checked the data connection and fill in all necessary parameters such as the Access Point Name. You will find this information ad your provider. Important notice! Make sure that the sim card has a valid data connection.

Token

Your unique can be found in CONTA-SUPERVISION top right corner under settings.

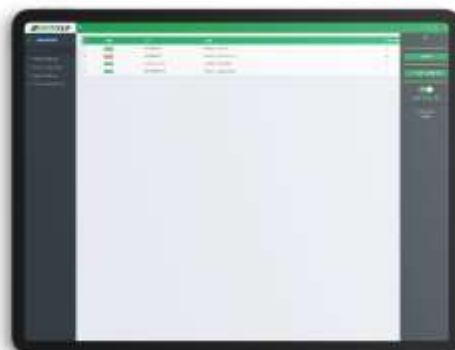



For the use of the CONTA-SUPERVISION IoT Portal and app you must check CONTA-SUPERVISION and fill in the company name and dashboard name together with your unique token.

Once the configuration is uploaded to the GSM-PRO2 the GSM-PRO2 I/O communication module will be shown in the CONTA-SUPERVISION IoT portal and/or app.

Do you experience any issue please feel free to contact us

Phone: +31 495 566 046

e-mail: support@conta-clip.nl