

## POWER SUPPLY 3-PHASE, 48 V DC DIMENSION Q SERIES 20A

QT40.481

PSU 3PH 380-480V ac I/P 48V dc 20A 960W O/P

- Output current of 20 A
- Up to 95.3% efficiency
- Integrated primary fuses
- High short-circuit currents
- Maximum performance



### PRODUCT DESCRIPTION

Pulse Dimension Q is a series power supply with very high performance. QT40.481 have built primary fuses that make it possible to connect the unit without the need for intermediate fuses up to 32 A (UL) which saves space and money. The efficiency is high over a wide load range, which results in reduced power consumption and longer life regardless of load current. An average efficiency is 94.7% with a peak value of 95.4%.

The power loss at idle is very low, 9.5 W. The bonus power provides 50% extra reserve with retained 48 V dc (30 A) which is an advantage when connected loads have high starting currents and to bridge temporary current peaks. The bonus power is limited to 4 seconds to avoid constant overloading of the power supply and wiring. In addition to the bonus effect leave the unit a very high short-circuit current (ms) that helps to secondary fuses. See technical data for example.

Active transient ensure operation also in very störrik electrical environment, also have QT40.481 active inrush current protection, which means a very low starting current, even if the unit has been in operation for a longer time. Especially useful for redundant / parallel-connected systems.

Simple diagnostics via DC-OK relay that falls on the output voltage deviates more than 10% from the set value, a green LED indicates DC-OK, Red LED indicates overload.

The unit can also be remote controlled for on / off function. Three different installation options available, see the "Technical data". Can be used instead of expensive DC contactors when you need to break up the 48 V side (remote control function has no safety circuit and therefore should not be used in the security context).

Active PFC reduces power consumption, harmonics close to zero, in addition, the power distribution in phases much smoother at power asymmetry.

In parallel, the output voltage to be adjusted to the same value on both units ( $\pm 100$  mV) in single mode or let the factory settings on the unit apply to all units. After possible. adjustment of the output voltage, the switch in the front moved to the "parallel use". The units are now ready to work in parallel.



We recommend clearance of 40 mm, 20 mm below the unit and 5 mm on the sides.

#### Bonus power

The power supply has a bonus power that enables high power output with maintained 48 V dc for 4 seconds, which is a big advantage when connected loads have high starting current, e.g. motors. How often you can use the bonus power depends on the application. With the diagram and formula below you can calculate the available repeat time for each application. Bonus power is available as soon as the power supply starts and immediately after a short circuit.

Bonus power


Operating characteristics

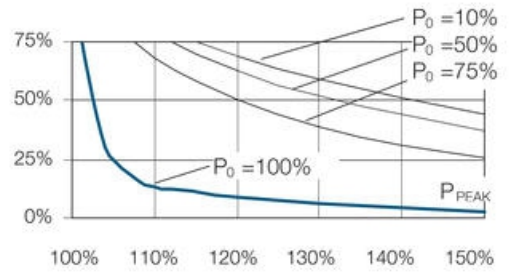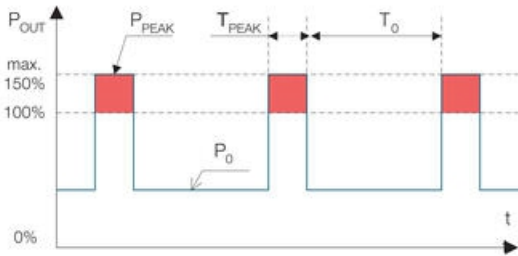


Po	Nominal load current
Ppeak	Peak current
To	Time between bonus power
Tpeak	Peak current I time
Operating cycle	Tpeak/ (Tpeak+To)
To=	Tpeak- (operating cycle*Tpeak) / operating cycle

E.g. Peak current (Ppeak) is 25A = 125 %. Peak time is 3 seconds. Nominal load current (Po) is 15A. 15 A = 75 % of  $I_{nom}$ . According to the diagram the operating cycle is about 0.45.  $T_o = 3 - (0.45 \cdot 3) / 0.45 = 3.6$ . Maximal repeat time of the bonus power is 3.6 seconds.

### Output characteristics



Remote control function This function permits outputs to be shut down by means of an external signals from e.g. a control system or button. Shutdown occurs immediately and to restart has a delay of about 350 ms. In a shutdown state the output voltage is below 2 V DC and the power is less than 0.5 W.

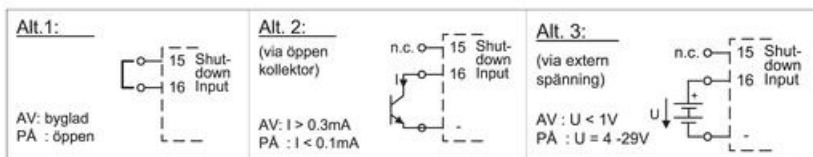

### SPECIFICATIONS

Active Transient	Yes
------------------	-----

Approvals	CB, CE, CSA, GL, UL
DC relay output	Yes
Depth	127
Effect	960
Efficiency At 400 V AC, full load. Typical	95.4
Efficiency At 400 V AC. Typical	94.7
Height	124
Hold-up time at 400 V AC, full load. Typical.	25
Input voltage AC	380-480 V
Input voltage ac max	576
Input voltage ac min	323
Input voltage range	Wide-range
Inrush current at 400 V ac typical	5
IP Class	IP20
Lifetime at 400 V ac, full load and +40 ° C	86000
MTBF (IEC 61709) 400 V ac, max loan, +40 °C	375000
Number of phases	3
Output Current	20
Output voltage	48
Output voltage max	54
Output voltage min	48
Power consumption at 400 V ac	1.65
Power Factor at 400 V AC, full load. Typical	0.88
Power Reduction Of 60 To 70 ° C	24
Ripple. max	150
Series	Dimension Q
Supply Frequency	50-60 ±6 %
Temperature Range Without Derating From	-25
Temperature Range Without Derating To	60
Weight	1.5
Width	110

Output voltage vs. output current in "single use" mode, typ.

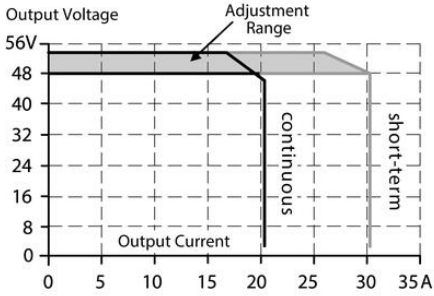


Fig. 6-4 Dynamic overcurrent capability, typ.

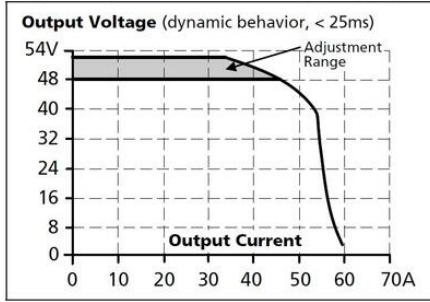


Fig. 17-1 Output current vs. ambient temp.

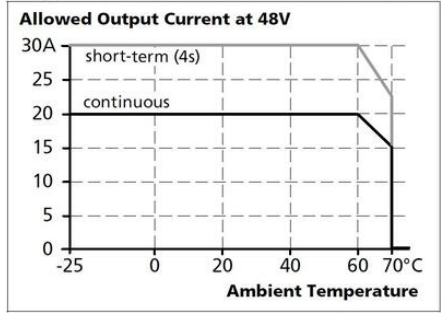


Fig. 6-3 Bonus time vs. output power

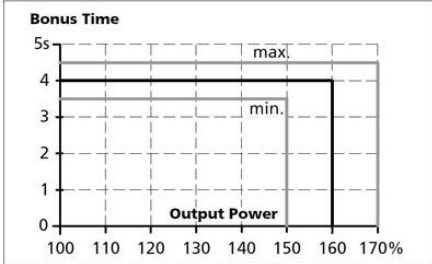


Fig. 11-1 Efficiency vs. output current at 48V, typ.


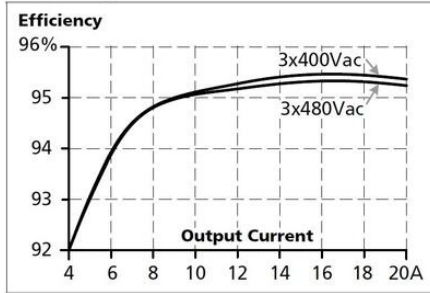


Fig. 11-2 Losses vs. output current at 48V, typ.

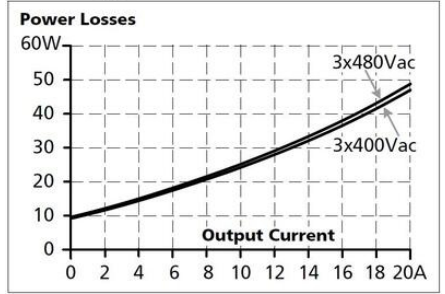

Maximal wire length<sup>1)</sup> for a fast (magnetic) tripping:

	0.75mm <sup>2</sup>	1.0mm <sup>2</sup>	1.5mm <sup>2</sup>	2.5mm <sup>2</sup>
C-2A	74m	89m	146m	190m
C-3A	57m	79m	128m	163m
C-4A	43m	52m	73m	116m
C-6A	19m	25m	27m	57m
C-8A	8m	12m	17m	25m
C-10A	6m	9m	13m	19m
C-13A	3m	5m	7m	10m
B-6A	38m	52m	76m	113m
B-10A	18m	26m	38m	55m
B-13A	12m	19m	29m	42m
B-16A	6m	8m	12m	20m
B-20A	1m	2m	4m	5m




Fig. 15-1 Front side



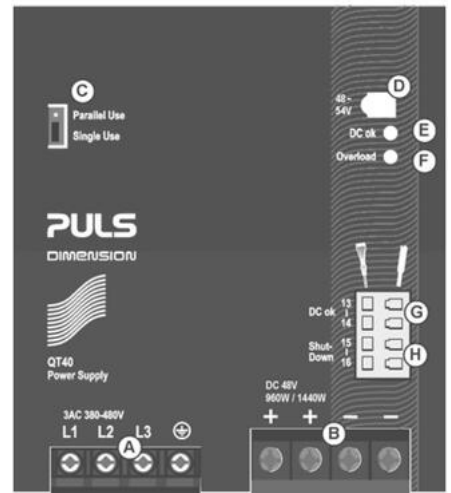


Fig. 22-1 Front view

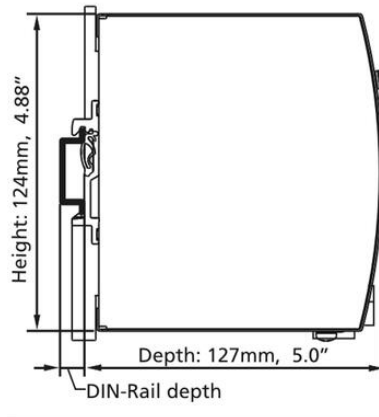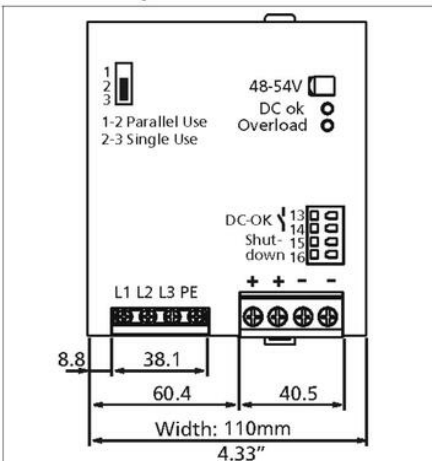

Output voltage vs. output current in "single use" mode, typ.

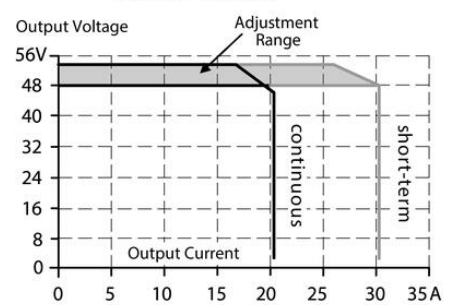


Fig. 6-4 Dynamic overcurrent capability, typ.

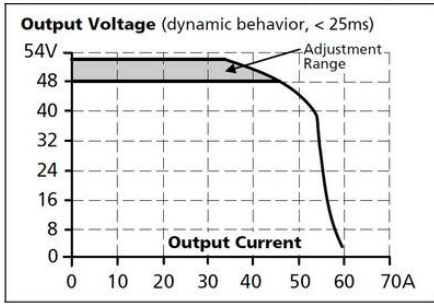


Fig. 17-1 Output current vs. ambient temp.

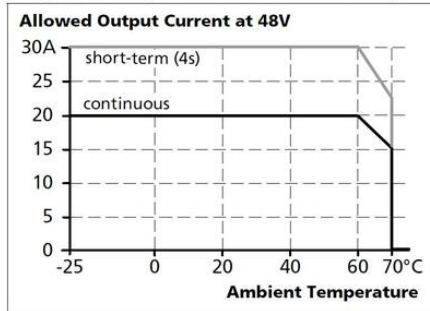


Fig. 6-3 Bonus time vs. output power

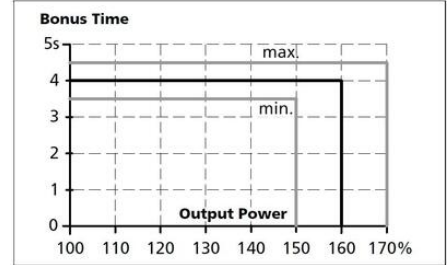


Fig. 11-1 Efficiency vs. output current at 48V, typ.


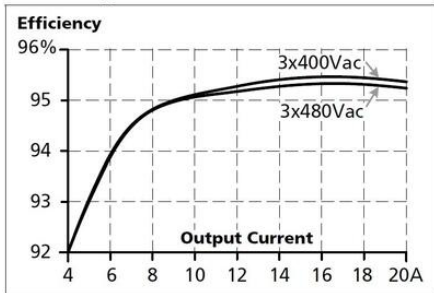


Fig. 11-2 Losses vs. output current at 48V, typ.

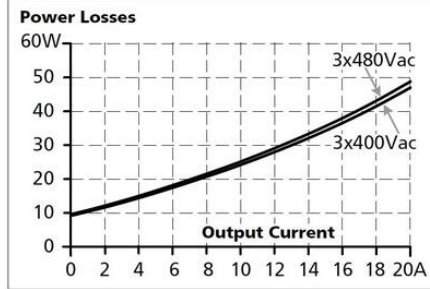

Maximal wire length<sup>1)</sup> for a fast (magnetic) tripping:

	0.75mm <sup>2</sup>	1.0mm <sup>2</sup>	1.5mm <sup>2</sup>	2.5mm <sup>2</sup>
C-2A	74m	89m	146m	190m
C-3A	57m	79m	128m	163m
C-4A	43m	52m	73m	116m
C-6A	19m	25m	27m	57m
C-8A	8m	12m	17m	25m
C-10A	6m	9m	13m	19m
C-13A	3m	5m	7m	10m
B-6A	38m	52m	76m	113m
B-10A	18m	26m	38m	55m
B-13A	12m	19m	29m	42m
B-16A	6m	8m	12m	20m
B-20A	1m	2m	4m	5m




Fig. 15-1 Front side

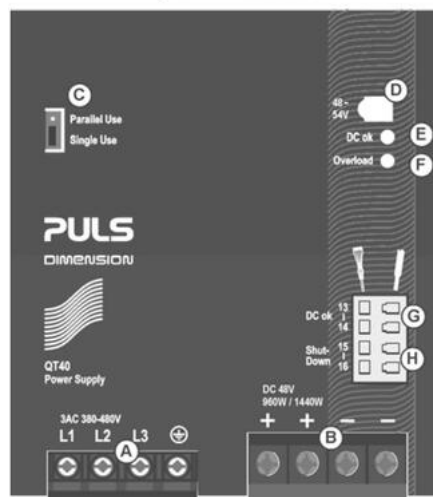


Fig. 22-1 Front view

