

## 24 V DC UPS FOR EXTERNAL BATTERY 3.9-40 AH

UB10.241

DC UPS 24V dc I/P 24V dc 10A O/P 3.9-40Ah

- Load current 10 A
- Only one 12 V battery
- Optimized battery charging
- Optional backup times
- Relay outputs for status



### Product description

UB10.241 is suitable for use in applications in which interruptions occur relatively often and the times are fairly short, such as for assuring process conclusion and retaining operation of PLC and other critical components.

A complete DC-UPS system consists of a control unit and battery, and power supply with suitable power for the application. In the event of a power outage, the battery is automatically switched in and supplies the connected loads. The control unit requires just (1) 12 V battery that then transforms the battery voltage up to 22.3 V dc. Two batteries do not need to be matched with one another and the output voltage does not follow the battery's discharge curve but is instead constant at 22.3 V. The battery capacity is utilized 100 % compared with two batteries connected in series, where one of the batteries is not fully charged.


Two relay outputs indicate status; the module is ready (battery capacity >85 %) and the module is active. (buffer mode) The control unit tests the battery's condition in cycles. When it is time to replace the battery, a relay output is activated (replace battery). At the front, optimized final charging voltage in relation to ambient temperature is selected. There are three available alternatives: 10 °C, 25 °C and 40 °C.

The back-up time can be set in different time ranges to save battery capacity. When choosing constant discharge, the output voltage will be active until the battery reaches deep discharge and the control unit then disconnects the battery. There is also an input, Inhibit, for external shut-off of the back-up time. In the event of a battery fuse fault, the "ready" output is deactivated and a red LED lights on the control unit. The output is current limited and turns itself off after about 5 seconds after a short circuit to spare the battery and at the same time, avoids tripping the battery fuse. In the event of a short circuit in the battery mode, the module supplies about 20 A, which helps trip any secondary fuses.


Monitoring of the battery fuse and current limitation in the event of short circuits provides increased reliability and guarantees that the UPS will function after a short circuit. There is no galvanic isolation between the 24 V dc input and output or between 24 V and 12 V. Isolation between the mains and the output is executed via the power supply.

### Backup times

Back-up time with 7 Ah battery (curve A)



Back-up time with 26 Ah battery



## Specifications

<b>Approvals</b>	ABS, CB, CE, CSA, CSA US, EX, GL, IECEx, UL
<b>Charging The Battery Type</b>	1.5
<b>Depth</b>	117
<b>Efficiency</b>	97.8
<b>Height</b>	124
<b>Input Current During Charging Of Aggregates</b>	1.2
<b>Input voltage for battery connection</b>	22.8
<b>Input Voltage From battery</b>	12
<b>Input Voltage From The Unit</b>	24
<b>IP Class</b>	IP20
<b>Life span</b>	137 400 h @ 10 A, 40 °C
<b>Material Protection</b>	Aluminium
<b>MTBF (IEC 61709)</b>	886 000 h @ 10 A, 40 °C
<b>Output current at 24 V dc</b>	10
<b>Output Current During Normal Operation Via The Unit Max</b>	15
<b>Output current for battery operation max</b>	10 A (15 A @ 5 s)
<b>Output Voltage at Battery</b>	22.25
<b>Output Voltage At Buffering</b>	22.25
<b>Output Voltage Normal Operation</b>	24
<b>Permitted Battery Sizes</b>	3,9-40 Ah
<b>Power Reduction Of 60 To 70 ° C</b>	9.6
<b>Ripple. max</b>	20
<b>Temperature Range Without Derating From</b>	-25
<b>Temperature Range Without Derating To</b>	60
<b>Type Power Supply</b>	DC-UPS
<b>Weight</b>	0.65
<b>Width</b>	49
<b>Voltage Level Of The Connection Of The Battery</b>	22.3

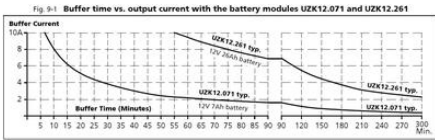


Fig. 24-2 Front view

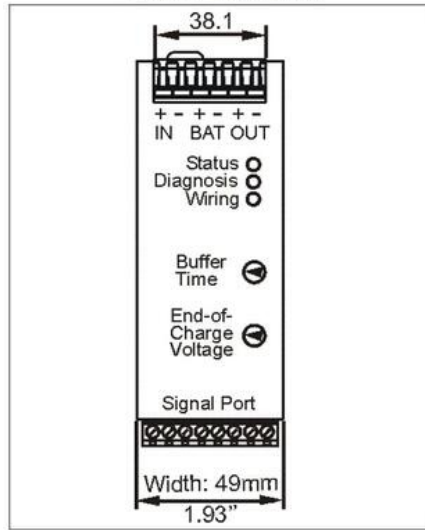


Fig. 24-1 Side view

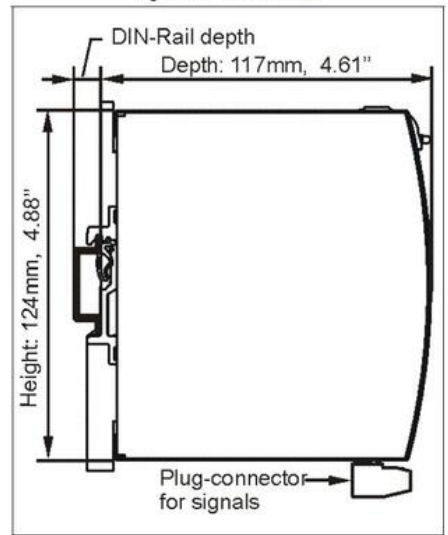


Fig. 25-1 Typical wiring diagram

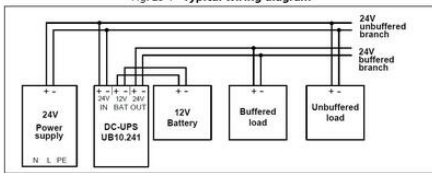


Fig. 24-1 Buffer time vs. output current with the battery modules UZX12.071 and UZX12.261

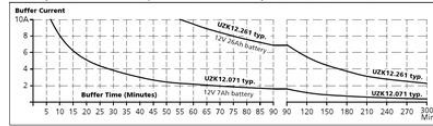


Fig. 24-2 Front view

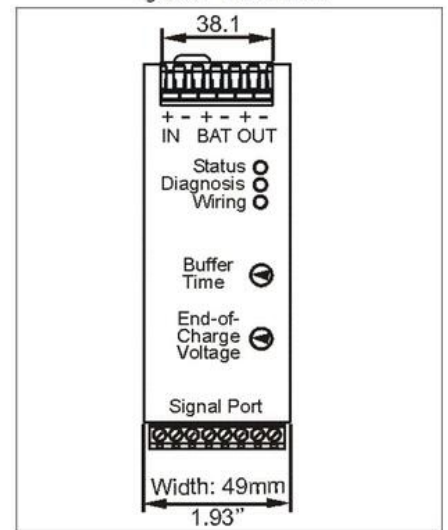


Fig. 24-1 Side view

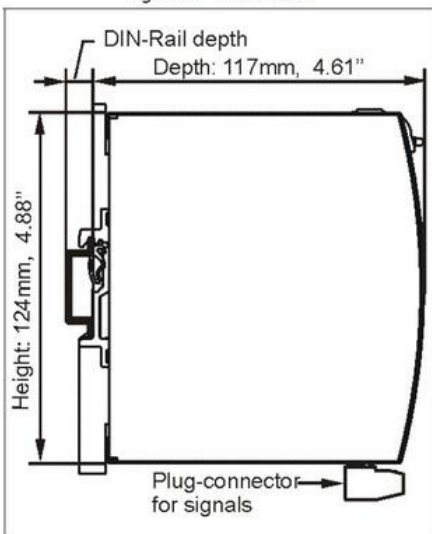


Fig. 25-1 Typical wiring diagram

