




- 

Order code Shaft version	8.5858 Type	.XX a b	2X c d	.21 e	1X f
a Flange 1 = clamping flange, IP65 ø 58 mm [2.28"] 3 = clamping flange, IP67 ø 58 mm [2.28"] 2 = synchro flange, IP65 ø 58 mm [2.28"] 4 = synchro flange, IP67 ø 58 mm [2.28"] 5 = square flange, IP65 □ 63.5 mm [2.5"] 7 = square flange, IP67 □ 63.5 mm [2.5"] b Shaft (ø x L), with flat 1 = 6 x 10 mm [0.24 x 0.39"] ¹⁾ 2 = 10 x 20 mm [0.39 x 0.79"] ²⁾ 3 = 1/4" x 7/8" 4 = 3/8" x 7/8" c Interface / power supply 2 = CANopen DS301 V4.02 / 10 ... 30 V DC	d Type of connection removable bus terminal cover 1 = radial cable gland 2 = 2 x M12 connector, 5-pin Fixed connection without bus terminal cover A = radial cable, 2 m [6.56'] PVC B = radial cable, special length PVC *) E = 1 x radial M12 connector, 5-pin F = 2 x radial M12 connector, 5-pin I = 1 x radial M23 connector, 12-pin J = 2 x radial M23 connector, 12-pin *) Available special lengths (connection type B): 3, 5, 8, 10, 15 m [9.84, 16.40, 26.25, 32.80, 49.21'] order code expansion .XXXX = length in dm ex.: 8.5858.112B.2113.0030 (for cable length 3 m) e Fieldbus profile 21 = CANopen f Options (service) 2 = no options 3 = SET button Optional on request - Ex 2/22 ³⁾ - surface protection salt spray tested				

Order code Hollow shaft

8.5878
Type

. XX2X . 211X
a b c d e f

a Flange

- 1 = with spring element, long, IP65
- 2 = with spring element, long, IP67
- 3 = with stator coupling, IP65 ø 65 mm [2.56"]
- 4 = with stator coupling, IP67 ø 65 mm [2.56"]
- 5 = with stator coupling, IP65 ø 63 mm [2.48"]
- 6 = with stator coupling, IP67 ø 63 mm [2.48"]

b Blind hollow shaft

- (insertion depth max. 30 mm [1.18"])
- 3 = ø 10 mm [0.39"]
- 4 = ø 12 mm [0.47"]
- 5 = ø 14 mm [0.55"]
- 6 = ø 15 mm [0.59"]
- 8 = ø 3/8"
- 9 = ø 1/2"

c Interface / power supply

- 2 = CANopen DS301 V4.02 / 10 ... 30 V DC

d Type of connection

- removable bus terminal cover
- 1 = radial cable gland
- 2 = 2 x M12 connector, 5-pin
- Fixed connection without bus terminal cover
- A = radial cable, 2 m [6.56'] PVC
- B = radial cable, special length PVC *)
- E = 1 x radial M12 connector, 5-pin
- F = 2 x radial M12 connector, 5-pin
- I = 1 x radial M23 connector, 12-pin
- J = 2 x radial M23 connector, 12-pin

*) Available special lengths (connection type B):
3, 5, 8, 10, 15 m [9.84, 16.40, 26.25, 32.80, 49.21']
order code expansion .XXXX = length in dm
ex.: 8.5878.542B.2113.0030 (for cable length 3 m)

e Fieldbus profile

- 21 = CANopen

f Options (service)




- 2 = no options
- 3 = SET button

Optional on request

- Ex 2/22 ¹⁾
- surface protection
- salt spray tested

Specifications

Connection Thread	Cable, M12, M23 contact
Housing diameter	58
IP Class	IP65, IP67
Mounting	Shoulder
Output	CANopen
Sensor type	Absolute
Shaft Diameter max	10
Shaft Diameter min	6
Supply Voltage DC Max	30
Supply Voltage DC Min	10
Temperature range from	-40
Temperature range to	80
Version	Singleturn

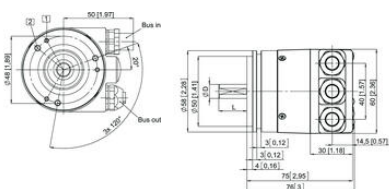

Bus terminal cover with terminal box (type of connection 1)											
Direction	OUT			IN			IN				
Signal	CAN_Ground	CAN_Low (+)	CAN_High (-)	0V power supply	+5V power supply	+5V power supply	0V power supply	+5V power supply	+5V power supply	CAN_Low (-)	CAN_High (+)
Abbreviation	CG	CL	CH	0V	+5V	+5V	0V	+5V	+5V	CL	CH
Cable colour											

Cable connection type of connection A)											
Direction	IN			IN			IN				
Signal	0V power supply	+5V power supply	+5V power supply	CAN_Low (-)	CAN_High (+)	CAN_Ground	0V power supply	+5V power supply	+5V power supply	CAN_Low (-)	CAN_High (+)
Abbreviation	0V	+5V	+5V	CL	CH	CG	0V	+5V	+5V	CL	CH
Cable colour	WH	BN	YE				WH	BN	YE		

Connector M23 (type of connection 2) or M12 (type of connection 3)											
Direction	OUT			IN			IN				
Signal	0V power supply	+5V power supply	+5V power supply	CAN_Low (-)	CAN_High (+)	CAN_Ground	0V power supply	+5V power supply	+5V power supply	CAN_Low (-)	CAN_High (+)
Abbreviation	0V	+5V	+5V	CL	CH	CG	0V	+5V	+5V	CL	CH
M23 PIN assignment	10	12	2	7	9		10	12	2	7	9
M12 PIN assignment	3	2	5	4	1		3	2	5	4	1

Bus terminal cover with Connectors 2 x M12 (type of connection 2, F or J)											
Direction	OUT			IN			IN				
Signal	CAN_Ground	CAN_Low (+)	CAN_High (-)	0V power supply	+5V power supply	+5V power supply	0V power supply	+5V power supply	+5V power supply	CAN_Low (-)	CAN_High (+)
M23 PIN assignment	3	2	7	10	12	2	10	12	2	7	3
M12 PIN assignment	1	5	4	3	2	3	2	5	4	1	1

Bus terminal cover with terminal base (type of connection T)

		OUT						IN					
Direction		CAN_Ground	CAN_Low (-)	CAN_High (+)	0 V power supply	+15 V power supply	+5 V power supply	0 V	+15 V power supply	+5 V power supply	CAN_Low (-)	CAN_High (+)	CAN_Ground
Abbreviation		CG	CL	CH	0 V	+15 V	+5 V	0 V	+15 V	+5 V	CL	CH	CG

Cable connection (type of connection R)

		IN					
Direction		0 V power supply	+15 V power supply	CAN_Low (-)	CAN_High (+)	CAN_Ground	
Abbreviation		0 V	+15 V	CL	CH	CG	
Cable colour		WH	BN	YS	GN	GV	



Connector M23 (type of connection I) or M12 (type of connection E)

		IN					
Direction		0 V power supply	+15 V power supply	CAN_Low (-)	CAN_High (+)	CAN_Ground	
Abbreviation		0 V	+15 V	CL	CH	CG	
M12 PIN assignment		10	12	2	7	3	
M23 PIN assignment		3	2	5	4	1	



Bus terminal cover with Connectors 2 x M12 (type of connection E, F or J)

		OUT						IN					
Direction		CAN_Ground	CAN_Low (-)	CAN_High (+)	0 V power supply	+15 V power supply	+5 V power supply	0 V	+15 V power supply	+5 V power supply	CAN_Low (-)	CAN_High (+)	CAN_Ground
Signal													
M12 PIN assignment		3	2	7	10	12	10	12	2	7	3		
M12 PIN assignment		1	5	6	3	2	3	2	5	4	1		