

KUEBLER - ABSOLUTE-CODED ANGULAR TRANSMITTER SENDIX F3653 / F3673, OPTICAL, SSI, Ø36 MM

SERIE F3653



- Housing diameter Ø36 mm
- SSI-Interface
- 17 bit resolution
- -40 to +90 ° C working temperature

PRODUCT DESCRIPTION

Sendix F3653 / F3673 is a series of single-axis optical axial and hole axle outputs with SSI interface and a resolution of up to 17 bits, despite its compact size of 36x42 mm. The sensor also has high enclosure class, shock resistance and a wide temperature range. The sensor is therefore very suitable for applications where extreme environments or temperatures can occur, such as mobile applications. The sensor is supplied with a tangential cable, which means that there is no exposed cable input on the sensor, but it is embedded in the housing itself to increase impact on impact and impact. The Sendix F3653 / F3673 is also available in a salt water resistant version.

Please refer to the images below for ordering information.

Order code	8.F3653 . XXXX . XX12							
Shaft version	Type	a	b	c	d	e	f	12
a Flange		1 = clamping flange, IP67, ø 36 mm [1.42"]						
		3 = clamping flange, IP65, ø 36 mm [1.42"]						
		2 = synchro flange, IP67, ø 36 mm [1.42"]						
		4 = synchro flange, IP65, ø 36 mm [1.42"]						
b Shaft (ø x L), with flat		1 = ø 6 x 12.5 mm [0.24 x 0.49"]						
		3 = ø 8 x 15 mm [0.32 x 0.59"]						
		5 = ø 10 x 20 mm [0.39 x 0.79"]						
		2 = ø 1/4" x 12.5 mm [0.49"]						
		4 = ø 3/8" x 5/8"						
c Interface / power supply		1 = SSI, BiSS / 5 V DC						
		2 = SSI, BiSS / 10 ... 30 V DC						
		3 = SSI, BiSS + 2048 ppr. SinCos / 5 V DC						
		4 = SSI, BiSS + 2048 ppr. SinCos / 10 ... 30 V DC						
		5 = SSI, BiSS / 5 V DC, with sensor output						
		6 = SSI, BiSS + 2048 ppr. SinCos / 5 V DC, with sensor output						
		7 = SSI, BiSS + 2048 ppr. RS422 / 5 V DC						
		8 = SSI, BiSS + 2048 ppr. RS422 / 10 ... 30 V DC						
d Type of connection		1 = tangential cable, 1 m [3.28] PUR						
		3 = tangential cable, 5 m [16.40] PUR						
		F = tangential cable, special length PUR *)						
		8 = axial M12 connector, 8-pin ¹⁾						
		*) Available special lengths (connection type F): 2, 3, 8, 10, 15 m [6.56, 9.84, 26.25, 32.80, 49.21'] order code expansion .XXXX = length in dm ex.: 8.F3653.432FG312.0030 (for cable length 3 m)						
e Code		B = SSI, binary						
		C = BiSS, binary						
		G = SSI, gray						
f Resolution		A = 10 bit						
		2 = 12 bit						
		3 = 13 bit						
		4 = 14 bit						
		7 = 17 bit						
		<i>Optional on request</i> - surface protection - salt spray tested - other resolutions						

Order code
Hollow shaft

8.F3673 . **XXXXX** . **XX12**
Type **a** **b** **c** **d** **e** **f**

a Flange

- 1 = with spring element, short, IP65
- 3 = with spring element, long, IP65
- 2 = with stator coupling, IP65, ø 46 mm [1.81"]**

b Through hollow shaft

- 1 = ø 6 mm [0.24"]
- 3 = ø 8 mm [0.32"]
- 2 = ø 1/4"
- Blind hollow shaft*
(insertion depth max. 14.5 mm [0.57"])
- 4 = ø 10 mm [0.39"]**

c Interface / power supply

- 1 = SSI, BiSS / 5 V DC
- 2 = SSI, BiSS / 10 ... 30 V DC**
- 3 = SSI, BiSS + 2048 ppr. SinCos / 5 V DC
- 4 = SSI, BiSS + 2048 ppr. SinCos / 10 ... 30 V DC
- 5 = SSI, BiSS / 5 V DC, with sensor output
- 6 = SSI, BiSS + 2048 ppr. SinCos / 5 V DC, with sensor output
- 7 = SSI, BiSS + 2048 ppr. RS422 / 5 V DC
- 8 = SSI, BiSS + 2048 ppr. RS422 / 10 ... 30 V DC

d Type of connection

- 1 = tangential cable, 1 m [3.28] PUR**
- 3 = tangential cable, 5 m [16.40] PUR
- F = tangential cable, special length PUR *)
- 8 = axial M12 connector, 8-pin ¹⁾

*) Available special lengths (connection type F):
2, 3, 8, 10, 15 m [6.56, 9.84, 26.25, 32.80, 49.21']
order code expansion .XXXX = length in dm
ex.: 8.F3673.242FG312.0030 (for cable length 3 m)

e Code

- B = SSI, binary
- C = BiSS, binary
- G = SSI, gray**



f Resolution

- A = 10 bit
- 2 = 12 bit
- 3 = 13 bit**
- 4 = 14 bit
- 7 = 17 bit

Optional on request
- surface protection
 salt spray tested
- other resolutions

SPECIFICATIONS

Housing diameter	36
IP Class	IP65, IP67
Shaft Diameter max	10
Shaft Diameter min	6
Supply Voltage DC Max	30
Supply Voltage DC Min	5
Temperature range from	-40
Temperature range to	90

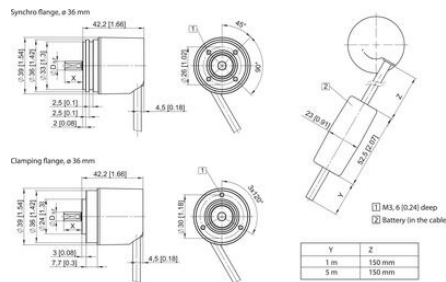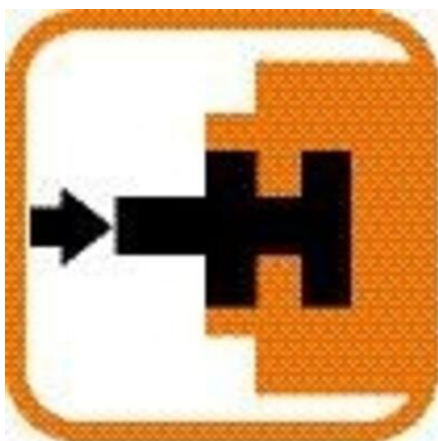


Terminal assignment

Interface	Type of connector	Features	Cable
1,2	1,3	SSI or BiSS, SET DIR, Status	Signal: GND +V +C -C +D -D SET DIR Stat PE Cable colour: Wh Bk Gn Ye Gy Pk Bl Rd Vt Shield
1,2	5	SSI or BiSS, SET DIR	M12 connector Signal: GND +V +C -C +D -D SET DIR M12 connector: 1 2 3 4 5 6 7 8 Pin
3,4	1,3	SSI or BiSS, SET DIR, 2048 SinCos	Cable Signal: GND +V +C -C +D -D SET DIR A A _{inc} B B _{inc} PE Cable colour: Wh Bk Gn Ye Gy Pk Bl Rd Vt (GPN, RD-BU, Shield)
5	1,3	SSI or BiSS, SET DIR, Sensor outputs	Cable Signal: GND +V +C -C +D -D GND _{ext} +V _{ext} PE Cable colour: Wh Bk Gn Ye Gy Pk Bl Rd Vt RD-BU Shield
6	1,3	SSI or BiSS, 2048 SinCos, Sensor outputs	Cable Signal: GND +V +C -C +D -D GND _{ext} +V _{ext} A A _{inc} B B _{inc} PE Cable colour: Wh Bk Gn Ye Gy Pk Bl Rd Vt GPN RD-BU Shield
7,8	1,3	SSI or BiSS, 2048 Inc. RS422	Cable Signal: GND +V +C -C +D -D A A _{inc} B B _{inc} PE Cable colour: Wh Bk Gn Ye Gy Pk Bl Vt (GPN, RD-BU, Shield)

Top view of mating side, male contact base

M12 connector, 8 pin

Legend:
+V Encoder power supply +V DC
GND Encoder power supply ground (GND (0V))
+C Clock signal
-C De-asserted signal
SET Set point. The current position becomes defined as position zero.
DIR Direction input. If this input is active, output values are counted backwards (decreased) when the shaft is turning clockwise.
Stat Status output
PE Protective earth
Pin# Pin# connector housing (Shield)
A A_{inc} Incremental output channel A
B B_{inc} Incremental output channel B

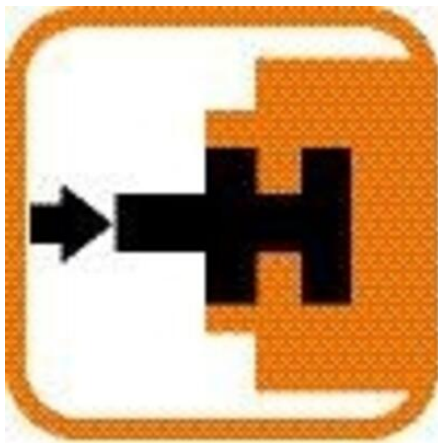

Terminal assignment

Interface	Type of connector	Features	Cable
1,2	1,3	ISO or BISS, SET DIR, Status	Signal: GND +V -C -D SET DIR Stat PE Cable colour: WH BN GN YE GY PK BU RD VT Shield
1,2	5	ISO or BISS, SET DIR	M12 connector Signal: GND +V -C -D SET DIR Shield PE M12 connector: 1 2 3 4 5 6 7 8 Pin
1,4	1,3	ISO or BISS, SET DIR, 2048 SinCos	Signal: GND +V -C -D SET DIR A Ainc B Binc PE Cable colour: WH BN GN YE GY PK BU RD VT (GYN, GYB) Shield
5	1,3	ISO or BISS, SET DIR, Status outputs	Signal: GND +V -C -D SET DIR GNDinc +Vinc PE Cable colour: WH BN GN YE GY PK BU RD VT RO BU Shield
8	1,3	ISO or BISS, 2048 SinCos Status outputs	Signal: GND +V -C -D SET DIR GNDinc +Vinc A Ainc B Binc PE Cable colour: WH BN GN YE GY PK BU RD BK VT (GYN, GYB) Shield
2,8	1,3	ISO or BISS, 2048 inc. RS422	Signal: GND +V -C -D SET DIR A Ainc B Binc PE Cable colour: WH BN GN YE GY PK BK VT (GYN) RO BU Shield

- +V Encoder power supply +V DC
- GND Encoder power supply ground GND (0V)
- C Clock signal
- D Data signal
- SET Set input. The current position becomes defined as position zero.
- DIR Direction input. If this input is active, output values are counted backwards (decrease) when the shaft is turning clockwise.
- Stat Status output
- PE Protective earth
- Pin Plug connector housing (Shield)
- A, A inc Incremental output channel A
- B, B inc Incremental output channel B

Top view of mating side, male contact base



M12 connector, 8-pin