



## DATASHEET

Issue 1.0



Multifunction Meters

Transducers & Isolators

Temperature Controllers

Converters & Recorders

Digital Panel Meters

Current Transformers

Analogue Panel Meters

Shunts

Digital Multimeters

Clamp Meters

Insulation Testers

## ND30


# METER OF POWER NETWORK PARAMETERS

### Features

- Measurement and recording of 54 power network parameters, including current and voltage harmonics up to 51st
- User programmable system types, 1-phase 2-wire or 3-phase 3 or 4-wire balanced and unbalanced
- Graphical colour display: LCD TFT 3,5", 320 x 240 pixels, fully configurable by a user
- Indications include the values of programmed ratios
- Memory of minimum and maximum values
- Programmable VT and CT ratio for Medium and Low Voltage applications
- 2 programmable configurable alarm outputs
- Optional: analogue output 0/4...20 mA and 2 PT 100 inputs (eg. for measurement of transformer temperature)
- Data archiving in the internal memory 8 GB (optional)
- Digital output RS-485 - MODBUS protocol
- Modern and user-friendly Ethernet interface 10/100 BASE-T (optional):
  - protocol: MODBUS TCP/IP, HTTP, FTP
  - services: www server, ftp server, DHCP client
- Free Configuration and monitoring software available (1 meter license)
- Battery backup RTC
- Protection grade from the front window: IP65
- Overall dimensions: 96 x 96 x 77 mm.

### SUBJECT TO CHANGE WITHOUT NOTICE

This manual superseded all previous versions – please keep for future reference

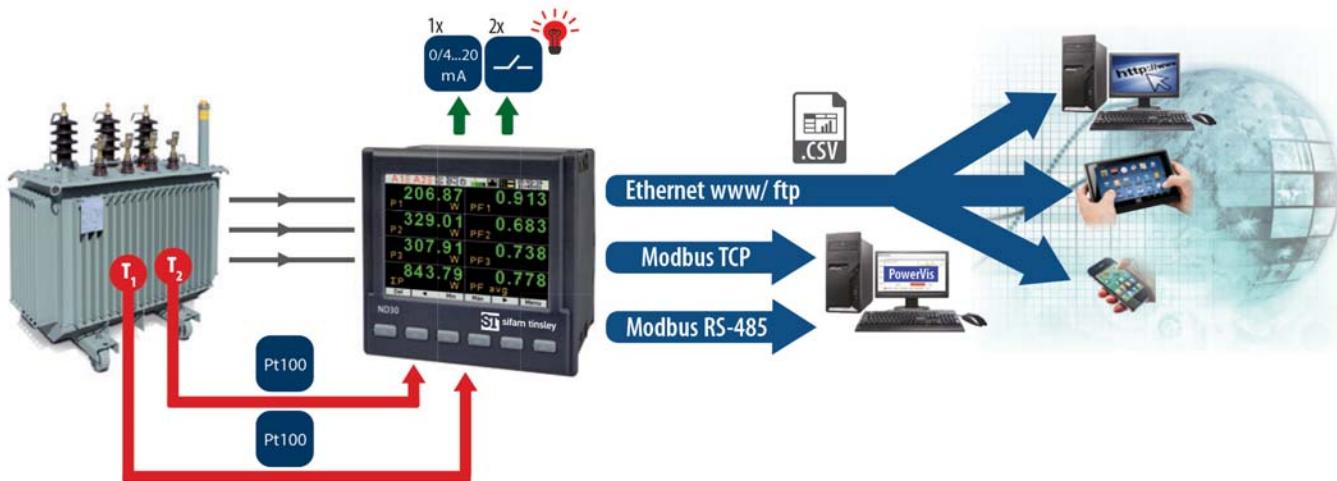**Example of Application**

**Measurement and Visualization of Power Network Parameters**

- Phase voltages:  $U_1, U_2, U_3$
- Phase-to-phase voltages:  $U_{12}, U_{23}, U_{31}$
- Phase currents  $i_1, i_2, i_3$
- Active phase powers:  $P_1, P_2, P_3$
- Reactive phase powers:  $Q_1, Q_2, Q_3$
- Apparent phase powers:  $S_1, S_2, S_3$
- Active power factors:  $PF_1, PF_2, PF_3$
- Reactive/active power factors:  $\text{tg}\varphi_1, \text{tg}\varphi_2, \text{tg}\varphi_3$
- Active, reactive and apparent 3-phase power:  $P, Q, S$
- Mean 3-phase power factors:  $PF, \text{tg}\varphi$
- Frequency  $f$
- Mean 3-phase voltage:  $U_s$
- Mean phase-to-phase voltage:  $U_{mf}$
- Mean 3-phase current:  $i_s$
- 15, 30, 60 minutes' mean active power:  $P_{\text{demand}}$
- Mean apparent power  $S_{\text{demand}}$
- Average current  $i_{\text{demand}}$
- Active, reactive and apparent 3-phase energy:  $EnP, EnQ, EnS$
- Active, reactive and apparent energy from external counter:  $EnPE$
- Total harmonic content coefficients for phase voltages and currents  $\text{THD}_{U_1}, \text{THD}_{U_2}, \text{THD}_{U_3}, \text{THD}_{i_1}, \text{THD}_{i_2}, \text{THD}_{i_3}$  and for 3-phase voltages and currents  $\text{THD}_U, \text{THD}_I$
- Harmonics for current and phase voltage up to 51 st!
- Temperature (2 x Pt100 input)

| Features   | Inputs   | Outputs  | Galvanic Isolation  |
|--|--|--|---|
| <br><br><br><br><br> | <br> | <br><br><br> | <br><br><br><br><br><br><br><br> |

### Technical Data - Measuring Range

| Measured value   | Measuring range   | L1 | L2 | L3 | $\Sigma$ | Class (*) / Basic error<br>(*) class relative to the measured value acc. to EN61557-12 |
|--|---|----|----|----|----------|--|
| Current 1/5 A<br>1 A~<br>5 A~  | 0.010 .. 0.100 .. 1.200 A (tr_I=1)<br>0.050 .. 0.500 .. 6.000 A (tr_I=1)<br>.. 20.00 kA (tr_I≠1)                      | •  | •  | •  |          | Class 0.2  |
| Voltage L-N<br>57.7 V~<br>230 V~<br>400 V~   | 5.7..11.5 .. 70.0 V (tr_U=1)<br>23.0..46 .. 276.0 V (tr_U=1)<br>40.0..80 .. 480.0 V (tr_U=1)<br>.. 480.0 kV (tr_U≠1)  | •  | •  | •  |          | Class 0.2  |
| Voltage L-L 100 V~<br>400 V~<br>690 V~   | 10.0 .. 20..120.0 V (tr_U=1)<br>40.0..80 .. 480.0 V (tr_U=1)<br>69.0..138 .. 830.0 V (tr_U=1)<br>.. 830.0 kV (tr_U≠1) | •  | •  | •  |          | Class 0.5  |
| Active power P <sub>i</sub> , average active power P <sub>dt</sub>   | .. (-)1999.9 W<br>.. (-)1999.9 MW (tr_U≠1.tr_I≠1)   | •  | •  | •  | •        | Class 0.5  |
| Reactive power Q <sub>i</sub>  | .. (-)1999.9 Var<br>.. (-)1999.9 MVar (tr_U≠1.tr_I≠1)   | •  | •  | •  | •        | Class 1  |
| Apparent power S <sub>i</sub> ,<br>average apparent power S <sub>dt</sub>  | .. 1999.9 VA<br>.. 1999.9 MVA (tr_U≠1.tr_I≠1)   | •  | •  | •  | •        | Class 0.5  |
| Active energy EnP<br>(imported or exported)  | .. (-)1999.9 Wh<br>.. (-)1999.9 MWh (tr_U≠1.tr_I≠1)   |    |    |    | •        | Class 0.5  |
| Reactive energy EnQ<br>(inductive or capacitive)   | .. (-)1999.9 Varh<br>.. (-)1999.9 MVarh (tr_U≠1.tr_I≠1)   |    |    |    | •        | Class 1  |
| Apparent energy EnS  | .. 1999.9 VAh<br>.. 1999.9 MVAh (tr_U≠1.tr_I≠1)   |    |    |    | •        | Class 0.5  |
| Active power factor PF <sub>i</sub>  | -1.00 .. 0 .. 1.00  | •  | •  | •  | •        | ± 0.01 of basic error  |
| Coefficient tgφ <sub>i</sub><br>(ratio of reactive power to active power)  | -1.20 .. 0 .. 1.20  | •  | •  | •  | •        | ± 0.01 of basic error  |
| Frequency f  | 45.00..65.00 Hz   |    |    |    | •        | Class 0.1  |
| Total harmonic distortion<br>of voltage THDU and current THDI  | 0.0 .. 100.0 %  | •  | •  | •  | •        | Class 5<br>50 / 60 Hz  |
| Amplitudes of the voltage U <sub>h1</sub> ... U <sub>h50</sub> ,<br>and current I <sub>h1</sub> ... I <sub>h50</sub> | 0.0 .. 100.0 %  | •  | •  | •  |          | Class 5<br>50 / 60 Hz  |

tr\_I, tr\_U – ratio of current and voltage transformer

### Inputs

|                               |   |
|-------------------------------|---|
| Input type                    | Properties  |
| Input Pt100 (T1, T2) - option | 2 x Pt100, 2-wire, -50...400°C, basic error 0.5 % |

### Digital Interface

| Interface type                 | Transmission protocol      |                | Baud rate   |
|--------------------------------|----------------------------|----------------|---|
| RS-485                         | Modbus RTU 8N2,8E1,8O1,8N1 | Address 1..247 | baud rate: 4.8, 9.6, 19.2, 38.4, 57.6, 115.2 kbit/s |
| Ethernet 10/100 Base-T -option | Modbus TCP,HTTP,FTP        |                | WWW server, FTP server, DHCP client                 |

## External Features

|                    |  |                              |
|--------------------|--|------------------------------|
| Readout field      | graphic colour display LCD TFT 3,5" , 320 x 240 pixels |                              |
| Overall dimensions | 96 x 96 x 77 mm  | mounting hole 92.5 x 92.5 mm |
| Weight             | 0.3 kg   |                              |
| Protection grade   | from frontal side: IP65                                | from terminal side: IP20     |


## Rated Operating Conditions

|  |  |  |
|--|--|--|
| Supply voltage                                 | 85...253 V a.c. (40...400 Hz) or 90...300 V d.c.   | power consumption $\leq$ 6 VA                              |
| Power consumption                              | in voltage circuit $\leq$ 0.2 VA   | in current circuit $\leq$ 0.1 VA                           |
| Input signal                                   | 0...0.1...1.2 In; 0.1...0.2...1.2 Un for current, voltage, PF <sub>i</sub> , tg <sub>j</sub> | frequency 45...50...60...65 Hz, sinusoidal (THD $\leq$ 8%) |
| Power factor                                   | -1...0...1   |  |
| Preheating time                                | 5 min.   |  |
| Ambient temperature                            | -10...23...55°C, class K55 acc. to EN61557-12  |  |
| Humidity                                       | 0...40...65...95%  | without condensation                                       |
| Operating position                             | any  |  |
| External magnetic field                        | $\leq$ 40...400 A/m d.c.   | $\leq$ 3 A/m a.c. 50/60 Hz                                 |
| Short-term overload                            | voltage input: 2 Un (5 sec.)   | current input 50 A (1 sec.)                                |
| Admissible crest factor                        | current: 2   | voltage: 2   |
| Additional error (in % of the intrinsic error) |  | from ambient temperature change:<br>$<$ 50% / 10°C         |


## Safety and Compatibility Requirements

|                                 |   |                      |
|---------------------------------|---|----------------------|
| Electromagnetic compatibility   | noise immunity  | acc. to EN 61000-6-2 |
|                                 | noise emissions   | acc. to EN 61000-6-4 |
| Isolation insured by the casing | double  | acc. to EN 61010-1   |
| Isolation between circuits      | basic   | acc. to EN 61010-1   |
| Pollution level                 | 2   | acc. to EN 61010-1   |
| Installation category           | III   | acc. to EN 61010-1   |
| Maximal phase-to-earth voltage  | <ul style="list-style-type: none"> <li>• for supply circuit and relay outputs 300 V</li> <li>• for measuring input 500 V</li> <li>• for circuits of RS-485, Ethernet, pulse input and output, analogue outputs: 50 V</li> </ul> | acc. to EN 61010-1   |
| Altitude a.s.l.                 | < 2000 m  |                      |

## Connection Diagrams

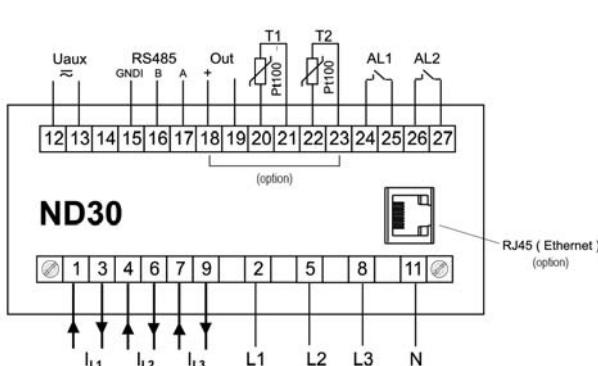

Description of meter connections strips

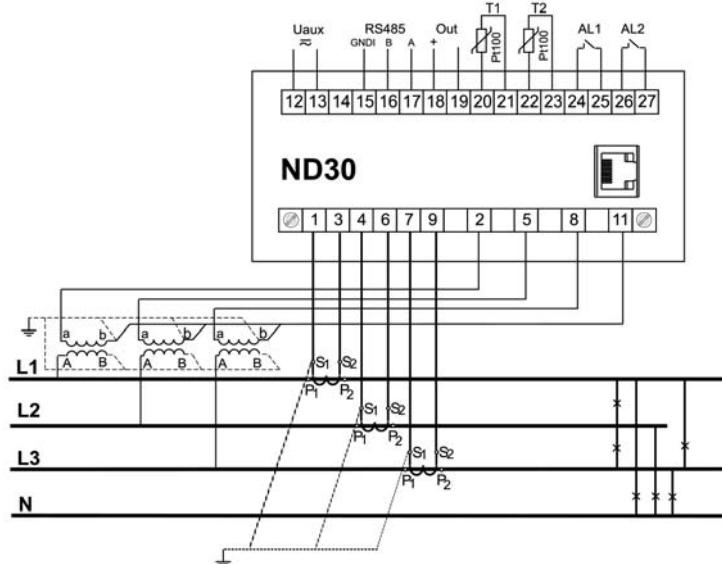

Indirect measurement in 4-wire network -  
connection of input signals

### Displaying of Measurement Parameters

|        |       |          |          |     |      |          |          |
|--------|-------|----------|----------|-----|------|----------|----------|
| A1     | A2    | T1: 32°C | T2: 31°C | 12% | TX   | 15/03/16 | 11:33:16 |
| 225.48 | 1.005 |          |          |     |      |          |          |
| U1     | V     | I1       | A        |     |      |          |          |
| 228.91 | 2.105 |          |          |     |      |          |          |
| U2     | V     | I2       | A        |     |      |          |          |
| 231.22 | 1.805 |          |          |     |      |          |          |
| U3     | V     | I3       | A        |     |      |          |          |
| 49.999 | 1.638 |          |          |     |      |          |          |
| f      | Hz    | avg      | A        |     |      |          |          |
| Del    | ◀     | Min      | Max      | ▶   | Menu |          |          |

|        |        |          |          |     |      |          |          |
|--------|--------|----------|----------|-----|------|----------|----------|
| A1     | A2     | T1: 52°C | T2: 57°C | 12% | TX   | 15/03/16 | 12:02:57 |
| 225.48 | 226.57 |          |          |     |      |          |          |
| U1     | V      | S1       | VA       |     |      |          |          |
| 1.005  |        | 0.913    |          |     |      |          |          |
| I1     | A      | PF1      |          |     |      |          |          |
| 206.88 | 0.447  |          |          |     |      |          |          |
| P1     | W      | tg1      |          |     |      |          |          |
| 92.387 | 49.999 |          |          |     |      |          |          |
| Q1     | var    | f        | Hz       |     |      |          |          |
| Del    | ◀      | Min      | Max      | ▶   | Menu |          |          |

|               |       |          |          |     |      |          |          |
|---------------|-------|----------|----------|-----|------|----------|----------|
| A1            | A2    | T1: 49°C | T2: 53°C | 12% | TX   | 22/09/15 | 13:36:31 |
| 0.905         | 0.905 |          |          |     |      |          |          |
| U1            | %     | I1       | %        |     |      |          |          |
| 0.905         | 0.903 |          |          |     |      |          |          |
| U2            | %     | I2       | %        |     |      |          |          |
| 0.903         | 0.903 |          |          |     |      |          |          |
| U3            | %     | I3       | %        |     |      |          |          |
| <b>Har. 5</b> |       |          |          |     |      |          |          |
| 50160         | ◀     | ▼        | ▲        | ▶   | Menu |          |          |



Up to 10 programmable screens  
(8 parameters per page);  
ability to change colour for all screens.

Available colours for digital indications:




Two screens dedicated to harmonics;  
indication of individual harmonic  
for voltages and currents (up to 51st);  
bargraph presentation for all harmonics  
with zoom function.

Easy to use and intuitive menu;  
information bar with status of: phase  
sequence, alarm outputs, temperature  
measurements\*, archiving and memory\*,  
Ethernet\* and RS-485 interfaces,  
time and date.

\*Availability of feature depends on  
hardware version of ND30.


## Meter Configuration with Free eCon Software

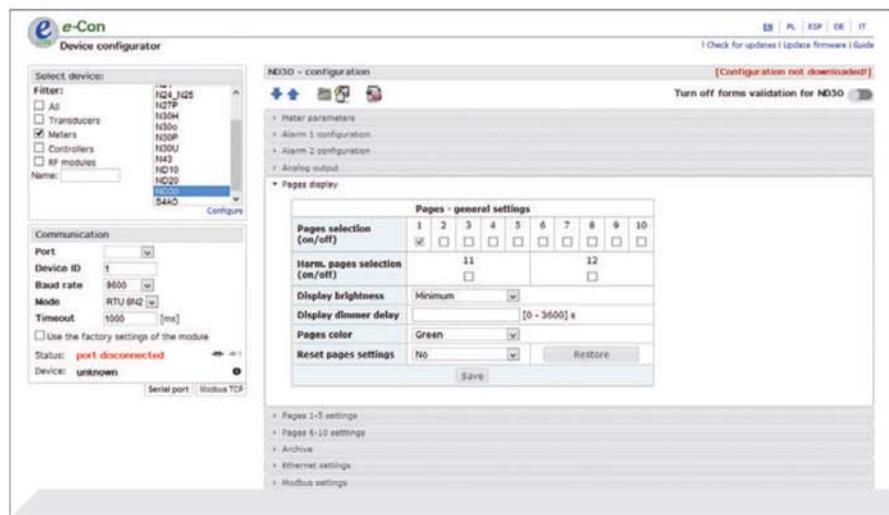

Ability to configure and update ND30 with free eCon software (via RS-485 or Ethernet\* interface).

\*Availability of feature depends on hardware version of ND30.

## Remote Readout of Parameters Through Ethernet:WWW, SERVER, FTP

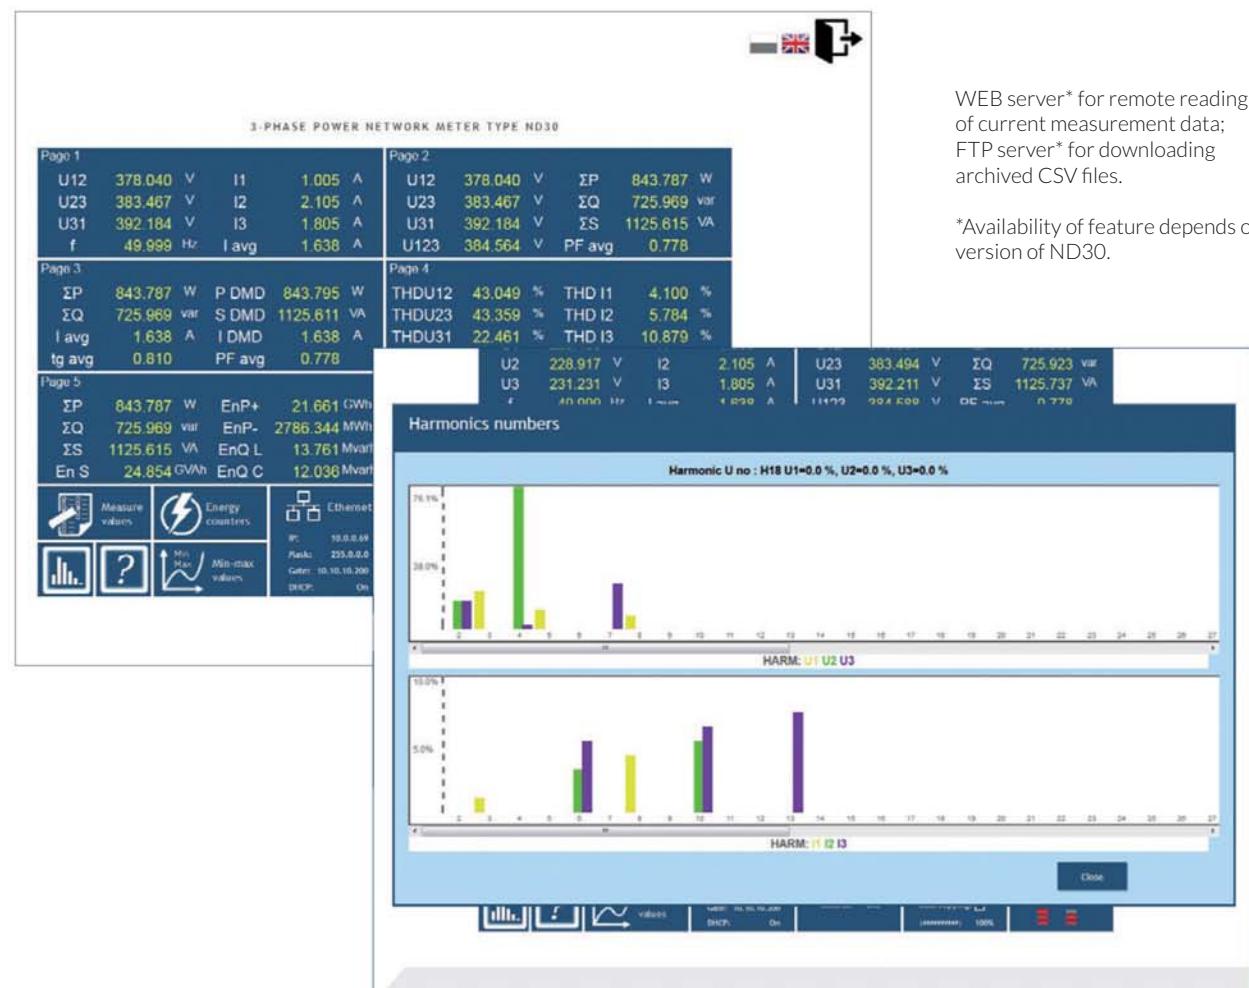

WEB server\* for remote reading of current measurement data; FTP server\* for downloading archived CSV files.

\*Availability of feature depends on hardware version of ND30.

|   |        |   |   |   |    |   |   |
|---|--------|---|---|---|----|---|---|
| <b>Ordering</b>                                 | ND30 - | X | X | X | XX | X | X |
| <b>Input voltage (phase/phase-to-phase) un:</b> |        |   |   |   |    |   |   |
| 3 x 57.7/ 100 V, 3x 230/ 400 V                  | 1      |   |   |   |    |   |   |
| 3 x 110/ 190 V, 3 x 400/ 690 V                  | 2      |   |   |   |    |   |   |
| <b>Additional outputs /inputs:</b>              |        |   |   |   |    |   |   |
| 2 relays  | 1      |   |   |   |    |   |   |
| 2 relays, 1 analogue output, 2 inputs PT100     | 2      |   |   |   |    |   |   |
| <b>Interface:</b>                               |        |   |   |   |    |   |   |
| RS-485  | 1      |   |   |   |    |   |   |
| RS-485 and Ethernet, internal memory            | 2      |   |   |   |    |   |   |
| <b>Version:</b>                                 |        |   |   |   |    |   |   |
| standard  | 00     |   |   |   |    |   |   |
| custom-made*                                    | XX     |   |   |   |    |   |   |
| <b>Language:</b>                                |        |   |   |   |    |   |   |
| English   | U      |   |   |   |    |   |   |
| other*  | X      |   |   |   |    |   |   |
| <b>Acceptance tests:</b>                        |        |   |   |   |    |   |   |
| without extra quality requirements              | 0      |   |   |   |    |   |   |
| with an extra quality inspection certificate    | 1      |   |   |   |    |   |   |
| acc. to customer's request                      | X      |   |   |   |    |   |   |

\* - after agreeing with the manufacturer

## See Also

|   |   |  |  |   |
|---|---|--|--|---|
|   |   |  |  |   |
| <b>ND40</b> - power network analyzer/ recorder              | <b>RE92</b> - dual loop controller          | <b>P30U</b> - universal transducer of temperature and standard signals | <b>KS31</b> - Digital synchronizing unit | <b>N43</b> - rail mounted 3-phase power network meter |
|   |   |  | <br>Free eCON software                   |   |
| <b>P43</b> - 3-phase transducer of power network parameters | <b>ND1</b> - analyser of network parameters | Current transformers from 5 A up to 6 kA                               |  |   |

## Contact



Sifam w Instrumentation Ltd

1 Warner Drive  
 Springwood Industrial Estate  
 Braintree, Essex  
 CM7 2YW

Tel: 01376 335271  
 E-mail: sales@sifamtinsley.com

[www.sifamtinsley.co.uk](http://www.sifamtinsley.co.uk)