



SUCO - 0500/0501 ELECTRONIC PRESSURE SWITCH

Factory set

0500400412010

0..4 bar, G1/4, No, PNP, EPDM, Deutsch DT04-3P

- Single switch point
- Small & compact
- Ceramic sensor
- Stainless steel housing

Product description

The SUCO 0500/0501 performance series electronic pressure switch offers a small compact electronic switch without compromising on quality which comes factory set (unadjustable by the user) with overpressure protection (up to 2x), has a long service life and is also attractively priced especially at high volumes. Using a ceramic sensor in thick film technology for a good operating temperature range and accuracy, there are six standard pressure ranges starting from 0..2 bar all the way up to 0..100 bar and a hysteresis of 1%-98%, available in normally open or normally closed with a PNP transistor output. The wetted parts are made of ceramic, stainless steel and either NBR, EPDM OR FKM ensuring excellent media compatibility, with six standard electrical connection options including Deutsch, DIN and M12 combined with two standard thread type options.

Customer specific solutions are also available on request.



Application examples

- Automotive
- Braking systems
- Medical
- Mobile hydraulics
- Off highway
- Off-shore
- Rail

Specifications

Accuracy	±0.5 % of adjustment range (Full scale) at room temperature
Adjustment range max	4
Adjustment range min	0
Burst Pressure	20
Electrical connection	Deutsch DT04-3P
EMC	EMC 2014/30/EU; EN 61000-6-2:2005; EN 61000-6-3:2007
Function	Normally open (SPST)
Hysteresis	1...98% full scale, programmable at factory (maximum tolerance ±1.0% of adjustment range nominal pressure)
IP Class	IP67, IP6K9K
Lifespan Mechanical	5,000,000 pulsations at rise rates to 1 bar/ms nominal pressure
Long-Term Stability	±0.1 % of adjustment range (full scale) per year
Material of body	Stainless steel 1.4305
Materials Wetted Parts	EPDM, Stainless steel 1.4305
Max. pressure	10
Membrane Material	EPDM
Output	PNP
Pressure rise	≤ 1 bar/ms
Process connection	G1/4
Repeatability & Reproducibility	±0.1 % of adjustment range (full scale)
Shock Resistance	500m / s ² ; 11 ms half sine wave; DIN EN 60068-2-27
Supply Voltage DC Max	32
Supply Voltage DC Min	9.6
Switching point adjustment range	2...100 % of adjustment range(full scale), set at factory

Switching time	< 4 ms
Temperature ambient from	-30
Temperature ambient to	100
Temperature range of media from	-30
Temperature range of media to	125
Weight	80
Vibration Resistance	20g: 4..2000 Hz sine wave, DIN EN 60068-2-6

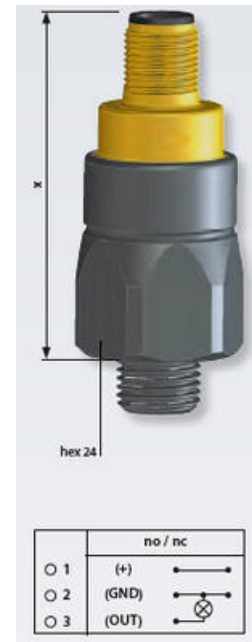

DIN EN 175301-809 A

Pin	Assignment
1	U _{in}
2	Gnd
3	U _{out}
4	FE

IP67
 ■ = 80 mm without cable relief
 ■ = 77 mm with cable relief

Order number: 013

M 12 - DIN EN 61076-2-101 A

Pin	Assignment
1	U _{in}
2	FE
3	Gnd
4	U _{out}

IP67
 ■ = 54 mm

Order number: 002

ISO 1570-A1-4.1

Pin	Assignment
1	U _{in}
2	FE
3	NC
4	Gnd
5	U _{out}

IP67
 ■ = 50 mm

Order number: 004

AMP Supersnarl 1.5*

Pin	Assignment
1	U _{in}
2	Gnd
3	U _{out}

IP67
 ■ = 60 mm

Order number: 007

Deutsch DT04-3P

Pin	Assignment
A	U _{in}
B	Gnd
C	U _{out}

IP67
 ■ = 61 mm

Order number: 010

Cable connection


Pin	Assignment
white	U _{in}
black	Gnd
red	U _{out}






IP67
 ■ = 47 mm (+ 25 mm band relief)

Cable length: ~ 2 m
 Order number: 011

Thread code: 11

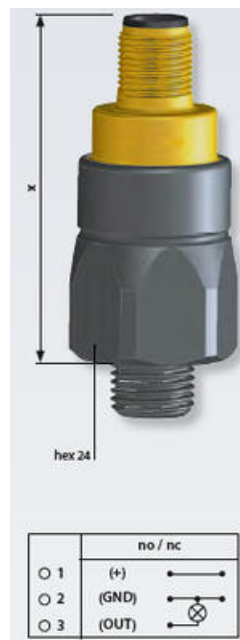Thread code: 09



DIN EN 175301-809 A	M 12 - DIN EN 61076-2-101 A	ISO 1570-A1-4.1																																
 <table border="1" data-bbox="1104 1426 1184 1482"> <thead> <tr> <th>Pin</th> <th>Assignment</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>U_{in}</td> </tr> <tr> <td>2</td> <td>Gnd</td> </tr> <tr> <td>3</td> <td>U_{out}</td> </tr> <tr> <td>4</td> <td>FE</td> </tr> </tbody> </table> <p>IP67</p> <p>■ = 60 mm without cable relief ■ = 77 mm with cable relief</p>	Pin	Assignment	1	U _{in}	2	Gnd	3	U _{out}	4	FE	 <table border="1" data-bbox="1201 1426 1283 1482"> <thead> <tr> <th>Pin</th> <th>Assignment</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>U_{in}</td> </tr> <tr> <td>2</td> <td>FE</td> </tr> <tr> <td>3</td> <td>Gnd</td> </tr> <tr> <td>4</td> <td>U_{out}</td> </tr> </tbody> </table> <p>IP67</p> <p>■ = 54 mm</p>	Pin	Assignment	1	U _{in}	2	FE	3	Gnd	4	U _{out}	 <table border="1" data-bbox="1335 1426 1396 1482"> <thead> <tr> <th>Pin</th> <th>Assignment</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>U_{in}</td> </tr> <tr> <td>2</td> <td>FE</td> </tr> <tr> <td>3</td> <td>NC</td> </tr> <tr> <td>4</td> <td>Gnd</td> </tr> <tr> <td>5</td> <td>U_{out}</td> </tr> </tbody> </table> <p>IP67</p> <p>■ = 50 mm</p>	Pin	Assignment	1	U _{in}	2	FE	3	NC	4	Gnd	5	U _{out}
Pin	Assignment																																	
1	U _{in}																																	
2	Gnd																																	
3	U _{out}																																	
4	FE																																	
Pin	Assignment																																	
1	U _{in}																																	
2	FE																																	
3	Gnd																																	
4	U _{out}																																	
Pin	Assignment																																	
1	U _{in}																																	
2	FE																																	
3	NC																																	
4	Gnd																																	
5	U _{out}																																	
Order number: 013	Order number: 002	Order number: 004																																
AMP Supersnarl 1.5*	Deutsch DT04-3P	Cable connection																																
 <table border="1" data-bbox="1104 1650 1184 1706"> <thead> <tr> <th>Pin</th> <th>Assignment</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>U_{in}</td> </tr> <tr> <td>2</td> <td>Gnd</td> </tr> <tr> <td>3</td> <td>U_{out}</td> </tr> </tbody> </table> <p>IP67</p> <p>■ = 60 mm</p>	Pin	Assignment	1	U _{in}	2	Gnd	3	U _{out}	 <table border="1" data-bbox="1201 1650 1283 1706"> <thead> <tr> <th>Pin</th> <th>Assignment</th> </tr> </thead> <tbody> <tr> <td>A</td> <td>U_{in}</td> </tr> <tr> <td>B</td> <td>Gnd</td> </tr> <tr> <td>C</td> <td>U_{out}</td> </tr> </tbody> </table> <p>IP67, IP68/AC</p> <p>■ = 61 mm</p>	Pin	Assignment	A	U _{in}	B	Gnd	C	U _{out}	 <table border="1" data-bbox="1335 1650 1396 1706"> <thead> <tr> <th>Pin</th> <th>Assignment</th> </tr> </thead> <tbody> <tr> <td>white</td> <td>U_{in}</td> </tr> <tr> <td>black</td> <td>Gnd</td> </tr> </tbody> </table> <p>IP67</p> <p>■ = 47 mm (+ 25 mm band relief) Cable length: ~ 2 m</p>	Pin	Assignment	white	U _{in}	black	Gnd										
Pin	Assignment																																	
1	U _{in}																																	
2	Gnd																																	
3	U _{out}																																	
Pin	Assignment																																	
A	U _{in}																																	
B	Gnd																																	
C	U _{out}																																	
Pin	Assignment																																	
white	U _{in}																																	
black	Gnd																																	
Order number: 007	Order number: 010	Order number: 011																																
 <p>Thread code: 11</p>	 <p>Thread code: 09</p>																																	