



SUCO - 0601/0602 PRESSURE SENSOR

Performance series

0601200411002
0-10V, 0..2 bar, G1/4-E, NBR, M12

- Measuring range up to 100 bar
- Ceramic sensor
- Small and compact
- Stainless steel housing



PRODUCT DESCRIPTION

The SUCO 0601/0602 performance series pressure sensor is a small, compact and cost effective pressure monitoring solution. Offering six standard pressure ranges with options of four different electrical connectors a thread of G1/4 and 0-10V or 4-20mA outputs. The 06 series uses a ceramic sensor in thick film technology which is housed in a stainless steel body.

Common applications include mobile hydraulics and power packs.

SPECIFICATIONS


Accuracy	±1% FS
Burst Pressure	8
IP Class	IP67
Lifespan Mechanical	5 million cycles
Long-Term Stability	±0.3% FS p.a.
Overpressure protection	4 bar
Pressure Range Max	2
Pressure Range Min	0
Pressure reference	Gauge
Pressure rise	1 bar/ms
Repeatability & Reproducibility	±0.1% FS
Response Time	2
Supply Voltage DC Max	32
Supply Voltage DC Min	11
Temperature ambient from	-30
Temperature ambient to	100
Temperature error	±0.04% FS/°C

Temperature range of media from	-30
Temperature range of media to	100
Weight	80



DIN EN 175301-803-A	M 12 - DIN EN 61076-2-101 A	ISO 15170-A1-4.1																																										
<table border="1"> <tr><th>Pin</th><th>0601</th><th>0602</th></tr> <tr><td>1</td><td>U_{ve}</td><td>U_{ve}</td></tr> <tr><td>2</td><td>Gnd</td><td>I_{sur}</td></tr> <tr><td>3</td><td>U_{sur}</td><td>nc*</td></tr> </table>	Pin	0601	0602	1	U _{ve}	U _{ve}	2	Gnd	I _{sur}	3	U _{sur}	nc*	<table border="1"> <tr><th>Pin</th><th>0601</th><th>0602</th></tr> <tr><td>1</td><td>U_{ve}</td><td>U_{ve}</td></tr> <tr><td>2</td><td>U_{sur}</td><td>nc*</td></tr> <tr><td>3</td><td>Gnd</td><td>I_{sur}</td></tr> <tr><td>4</td><td>nc*</td><td>nc*</td></tr> </table>	Pin	0601	0602	1	U _{ve}	U _{ve}	2	U _{sur}	nc*	3	Gnd	I _{sur}	4	nc*	nc*	<table border="1"> <tr><th>Pin</th><th>0601</th><th>0602</th></tr> <tr><td>1</td><td>U_{ve}</td><td>U_{ve}</td></tr> <tr><td>2</td><td>Gnd</td><td>nc*</td></tr> <tr><td>3</td><td>U_{sur}</td><td>I_{sur}</td></tr> <tr><td>4</td><td>nc*</td><td>nc*</td></tr> </table>	Pin	0601	0602	1	U _{ve}	U _{ve}	2	Gnd	nc*	3	U _{sur}	I _{sur}	4	nc*	nc*
Pin	0601	0602																																										
1	U _{ve}	U _{ve}																																										
2	Gnd	I _{sur}																																										
3	U _{sur}	nc*																																										
Pin	0601	0602																																										
1	U _{ve}	U _{ve}																																										
2	U _{sur}	nc*																																										
3	Gnd	I _{sur}																																										
4	nc*	nc*																																										
Pin	0601	0602																																										
1	U _{ve}	U _{ve}																																										
2	Gnd	nc*																																										
3	U _{sur}	I _{sur}																																										
4	nc*	nc*																																										
IP65	IP67	IP67, IP6XK																																										
x - 60 mm without coupler socket x - 77 mm with coupler socket	x - 54 mm	x - 56 mm																																										
Order number: 013	Order number: 002	Order number: 004																																										

AMP Superseal 1.5*	Deutsch DT04-3P																								
<table border="1"> <tr><th>Pin</th><th>0601</th><th>0602</th></tr> <tr><td>1</td><td>U_{sur}</td><td>nc*</td></tr> <tr><td>2</td><td>Gnd</td><td>I_{sur}</td></tr> <tr><td>3</td><td>U_{ve}</td><td>U_{ve}</td></tr> </table>	Pin	0601	0602	1	U _{sur}	nc*	2	Gnd	I _{sur}	3	U _{ve}	U _{ve}	<table border="1"> <tr><th>Pin</th><th>0601</th><th>0602</th></tr> <tr><td>A</td><td>U_{ve}</td><td>U_{ve}</td></tr> <tr><td>B</td><td>Gnd</td><td>nc*</td></tr> <tr><td>C</td><td>U_{sur}</td><td>I_{sur}</td></tr> </table>	Pin	0601	0602	A	U _{ve}	U _{ve}	B	Gnd	nc*	C	U _{sur}	I _{sur}
Pin	0601	0602																							
1	U _{sur}	nc*																							
2	Gnd	I _{sur}																							
3	U _{ve}	U _{ve}																							
Pin	0601	0602																							
A	U _{ve}	U _{ve}																							
B	Gnd	nc*																							
C	U _{sur}	I _{sur}																							
IP67	IP67, IP6XK																								
x - 61 mm	x - 61 mm																								
Order number: 007	Order number: 010																								

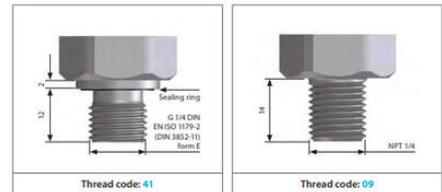

DIN EN 175301-803-A	M 12 - DIN EN 61076-2-101 A	ISO 15170-A1-4.1																																										
<table border="1"> <tr><th>Pin</th><th>0601</th><th>0602</th></tr> <tr><td>1</td><td>U_{ve}</td><td>U_{ve}</td></tr> <tr><td>2</td><td>Gnd</td><td>I_{sur}</td></tr> <tr><td>3</td><td>U_{sur}</td><td>nc*</td></tr> </table>	Pin	0601	0602	1	U _{ve}	U _{ve}	2	Gnd	I _{sur}	3	U _{sur}	nc*	<table border="1"> <tr><th>Pin</th><th>0601</th><th>0602</th></tr> <tr><td>1</td><td>U_{ve}</td><td>U_{ve}</td></tr> <tr><td>2</td><td>U_{sur}</td><td>nc*</td></tr> <tr><td>3</td><td>Gnd</td><td>I_{sur}</td></tr> <tr><td>4</td><td>nc*</td><td>nc*</td></tr> </table>	Pin	0601	0602	1	U _{ve}	U _{ve}	2	U _{sur}	nc*	3	Gnd	I _{sur}	4	nc*	nc*	<table border="1"> <tr><th>Pin</th><th>0601</th><th>0602</th></tr> <tr><td>1</td><td>U_{ve}</td><td>U_{ve}</td></tr> <tr><td>2</td><td>Gnd</td><td>nc*</td></tr> <tr><td>3</td><td>U_{sur}</td><td>I_{sur}</td></tr> <tr><td>4</td><td>nc*</td><td>nc*</td></tr> </table>	Pin	0601	0602	1	U _{ve}	U _{ve}	2	Gnd	nc*	3	U _{sur}	I _{sur}	4	nc*	nc*
Pin	0601	0602																																										
1	U _{ve}	U _{ve}																																										
2	Gnd	I _{sur}																																										
3	U _{sur}	nc*																																										
Pin	0601	0602																																										
1	U _{ve}	U _{ve}																																										
2	U _{sur}	nc*																																										
3	Gnd	I _{sur}																																										
4	nc*	nc*																																										
Pin	0601	0602																																										
1	U _{ve}	U _{ve}																																										
2	Gnd	nc*																																										
3	U _{sur}	I _{sur}																																										
4	nc*	nc*																																										
IP65	IP67	IP67, IP6XK																																										
x - 60 mm without coupler socket x - 77 mm with coupler socket	x - 54 mm	x - 56 mm																																										
Order number: 013	Order number: 002	Order number: 004																																										

AMP Superseal 1.5*	Deutsch DT04-3P																								
<table border="1"> <tr><th>Pin</th><th>0601</th><th>0602</th></tr> <tr><td>1</td><td>U_{sur}</td><td>nc*</td></tr> <tr><td>2</td><td>Gnd</td><td>I_{sur}</td></tr> <tr><td>3</td><td>U_{ve}</td><td>U_{ve}</td></tr> </table>	Pin	0601	0602	1	U _{sur}	nc*	2	Gnd	I _{sur}	3	U _{ve}	U _{ve}	<table border="1"> <tr><th>Pin</th><th>0601</th><th>0602</th></tr> <tr><td>A</td><td>U_{ve}</td><td>U_{ve}</td></tr> <tr><td>B</td><td>Gnd</td><td>nc*</td></tr> <tr><td>C</td><td>U_{sur}</td><td>I_{sur}</td></tr> </table>	Pin	0601	0602	A	U _{ve}	U _{ve}	B	Gnd	nc*	C	U _{sur}	I _{sur}
Pin	0601	0602																							
1	U _{sur}	nc*																							
2	Gnd	I _{sur}																							
3	U _{ve}	U _{ve}																							
Pin	0601	0602																							
A	U _{ve}	U _{ve}																							
B	Gnd	nc*																							
C	U _{sur}	I _{sur}																							
IP67	IP67, IP6XK																								
x - 61 mm	x - 61 mm																								
Order number: 007	Order number: 010																								

