



## SUCO - 0601/0602 PRESSURE SENSOR

### Performance series

0602400413007

4-20mA, 0..4 bar, G1/4-E, FKM, AMP Superseal 1.5®

- Measuring range up to 100 bar
- Ceramic sensor
- Small and compact
- Stainless steel housing



### Product description

The SUCO 0601/0602 performance series pressure sensor is a small, compact and cost effective pressure monitoring solution. Offering six standard pressure ranges with options of four different electrical connectors a thread of G1/4 and 0-10V or 4-20mA outputs. The 06 series uses a ceramic sensor in thick film technology which is housed in a stainless steel body.

Common applications include mobile hydraulics and power packs.


### Specifications

<b>Accuracy</b>	±1% FS
<b>Burst Pressure</b>	20
<b>Connection Thread</b>	G1/4-E
<b>Electrical connection</b>	AMP Superseal
<b>IP Class</b>	IP67
<b>Lifespan Mechanical</b>	5 million cycles
<b>Long-Term Stability</b>	±0.3% FS p.a.
<b>Material of body</b>	Stainless steel 1.4305
<b>Materials Wetted Parts</b>	Stainless steel 1.4305, Ceramic, FKM
<b>Overpressure protection</b>	10 bar
<b>Pressure Range Max</b>	4
<b>Pressure Range Min</b>	0

Pressure reference	Gauge
Pressure rise	1 bar/ms
Repeatability & Reproducibility	±0.1% FS
Response Time	2
Shock Resistance	500m / s <sup>2</sup> ; 11 ms half sine wave; DIN EN 60068-2-27
Signal type	4-20 mA
Supply Voltage DC Max	32
Supply Voltage DC Min	9.6
Temperature ambient from	-30
Temperature ambient to	100
Temperature error	±0.04% FS/°C
Temperature range of media from	-20
Temperature range of media to	125
Weight	80
Vibration Resistance	20g: 4..2000 Hz sine wave, DIN EN 60068-2-6



<b>DIN EN 175301-803-A</b>  <table border="1"> <tr><th>Pin</th><th>0601</th><th>0602</th></tr> <tr><td>1</td><td>U<sub>v+</sub></td><td>U<sub>v+</sub></td></tr> <tr><td>2</td><td>Gnd</td><td>I<sub>ref</sub></td></tr> <tr><td>3</td><td>U<sub>ref</sub></td><td>nc*</td></tr> </table> <p>IP65</p> <p>x ~ 60 mm without coupler socket x ~ 77 mm with coupler socket</p> <p>Order number: 013</p>	Pin	0601	0602	1	U <sub>v+</sub>	U <sub>v+</sub>	2	Gnd	I <sub>ref</sub>	3	U <sub>ref</sub>	nc*	<b>M 12 - DIN EN 61076-2-101 A</b>  <table border="1"> <tr><th>Pin</th><th>0601</th><th>0602</th></tr> <tr><td>1</td><td>U<sub>v+</sub></td><td>U<sub>v+</sub></td></tr> <tr><td>2</td><td>U<sub>ref</sub></td><td>nc*</td></tr> <tr><td>3</td><td>Gnd</td><td>I<sub>ref</sub></td></tr> <tr><td>4</td><td>nc*</td><td>nc*</td></tr> </table> <p>IP67</p> <p>x ~ 54 mm</p> <p>Order number: 002</p>	Pin	0601	0602	1	U <sub>v+</sub>	U <sub>v+</sub>	2	U <sub>ref</sub>	nc*	3	Gnd	I <sub>ref</sub>	4	nc*	nc*	<b>ISO 15170-A1-4.1</b>  <table border="1"> <tr><th>Pin</th><th>0601</th><th>0602</th></tr> <tr><td>1</td><td>U<sub>v+</sub></td><td>U<sub>v+</sub></td></tr> <tr><td>2</td><td>Gnd</td><td>nc*</td></tr> <tr><td>3</td><td>U<sub>ref</sub></td><td>I<sub>ref</sub></td></tr> <tr><td>4</td><td>nc*</td><td>nc*</td></tr> </table> <p>IP67, IP69K</p> <p>x ~ 56 mm</p> <p>Order number: 004</p>	Pin	0601	0602	1	U <sub>v+</sub>	U <sub>v+</sub>	2	Gnd	nc*	3	U <sub>ref</sub>	I <sub>ref</sub>	4	nc*	nc*
Pin	0601	0602																																										
1	U <sub>v+</sub>	U <sub>v+</sub>																																										
2	Gnd	I <sub>ref</sub>																																										
3	U <sub>ref</sub>	nc*																																										
Pin	0601	0602																																										
1	U <sub>v+</sub>	U <sub>v+</sub>																																										
2	U <sub>ref</sub>	nc*																																										
3	Gnd	I <sub>ref</sub>																																										
4	nc*	nc*																																										
Pin	0601	0602																																										
1	U <sub>v+</sub>	U <sub>v+</sub>																																										
2	Gnd	nc*																																										
3	U <sub>ref</sub>	I <sub>ref</sub>																																										
4	nc*	nc*																																										
<b>AMP Superseal 1.5*</b>  <table border="1"> <tr><th>Pin</th><th>0601</th><th>0602</th></tr> <tr><td>1</td><td>U<sub>ref</sub></td><td>nc*</td></tr> <tr><td>2</td><td>Gnd</td><td>I<sub>ref</sub></td></tr> <tr><td>3</td><td>U<sub>v+</sub></td><td>U<sub>v+</sub></td></tr> </table> <p>IP67</p> <p>x ~ 61 mm</p> <p>Order number: 007</p>	Pin	0601	0602	1	U <sub>ref</sub>	nc*	2	Gnd	I <sub>ref</sub>	3	U <sub>v+</sub>	U <sub>v+</sub>	<b>Deutsch DT04-3P</b>  <table border="1"> <tr><th>Pin</th><th>0601</th><th>0602</th></tr> <tr><td>A</td><td>U<sub>v+</sub></td><td>U<sub>v+</sub></td></tr> <tr><td>B</td><td>Gnd</td><td>nc*</td></tr> <tr><td>C</td><td>U<sub>ref</sub></td><td>I<sub>ref</sub></td></tr> </table> <p>IP67, IP69K</p> <p>x ~ 61 mm</p> <p>Order number: 010</p>	Pin	0601	0602	A	U <sub>v+</sub>	U <sub>v+</sub>	B	Gnd	nc*	C	U <sub>ref</sub>	I <sub>ref</sub>																			
Pin	0601	0602																																										
1	U <sub>ref</sub>	nc*																																										
2	Gnd	I <sub>ref</sub>																																										
3	U <sub>v+</sub>	U <sub>v+</sub>																																										
Pin	0601	0602																																										
A	U <sub>v+</sub>	U <sub>v+</sub>																																										
B	Gnd	nc*																																										
C	U <sub>ref</sub>	I <sub>ref</sub>																																										

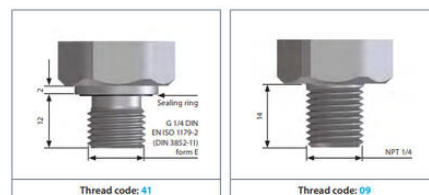



DIN EN 175301-803-A			
Pin	0601	0602	
1	Uv+	Uv+	
2	Gnd	I <sub>out</sub>	
3	U <sub>out</sub>	nc*	
IP65			
x ~ 60 mm without coupler socket x ~ 77 mm with coupler socket			
Order number: 013			

AMP Superseal 1.5*			
Pin	0601	0602	
1	U <sub>out</sub>	nc*	
2	Gnd	I <sub>out</sub>	
3	Uv+	Uv+	
IP67			
x ~ 61 mm			
Order number: 007			

M 12 - DIN EN 61076-2-101 A			
Pin	0601	0602	
1	Uv+	Uv+	
2	U <sub>out</sub>	nc*	
3	Gnd	I <sub>out</sub>	
4	nc*	nc*	
IP67			
x ~ 54 mm			
Order number: 002			

Deutsch DT04-3P			
Pin	0601	0602	
A	Uv+	Uv+	
B	Gnd	nc*	
C	U <sub>out</sub>	I <sub>out</sub>	
IP67, IP6X3K			
x ~ 61 mm			
Order number: 010			

ISO 15170-A1-4.1			
Pin	0601	0602	
1	Uv+	Uv+	
2	Gnd	nc*	
3	U <sub>out</sub>	I <sub>out</sub>	
4	nc*	nc*	
IP67, IP6X3K			
x ~ 56 mm			
Order number: 004			

