



SUCO - 0134/0135 PRESSURE SWITCH

IP67

0134457031003

0,3..1,5 bar, G1/4, CO, NBR, M12x1

- Up to 48 V
- M12x1 integrated connector
- Five adjustment ranges from 0,3..1,5 bar to 50..200 bar
- Changeover (SPDT)
- Over pressure safety from 100 bar up to 600 bar



Product description



The 0134/0135 series pressure switch is part of the integrated connector range from SUCO offering high IP rating. Integrated M12x1 connector and a maximum voltage of 48 V with a normally open and normally closed contact housed in a hex 27 zinc plated body offering a high pressure resistance. The switch point is very stable even after a long period of time and high load and is also adjustable on site and can come pre-set.

Common applications include automotive, mobile hydraulics, water applications and braking systems.

Specifications

| | |
|-----------------------------|-----------------|
| Adjustment range max | 1.5 |
| Adjustment range min | 0.3 |
| Approvals | CSA US, RoHS II |

| | |
|---------------------------------|---|
| Contact Rating Max | 4 |
| Deviation max | ±0,2 |
| Electrical connection | M12 |
| Function | Changeover (SPDT) |
| Hysteresis | 10-30% depending on set value |
| IP Class | IP67 |
| Lifespan Mechanical | 1 million exchanges |
| Material of body | Zinc-plated steel |
| Materials Wetted Parts | Zinc-plated steel, NBR |
| Max switching frequency/min | 200 |
| Max. pressure | 100 |
| Membrane Material | NBR |
| Process connection | 1/4 BSP |
| Shock Resistance | 294m / s ² ; 14 ms half sinusoidal wave; DIN EN 60068-2-27 |
| Temperature ambient from | -20 |
| Temperature ambient to | 80 |
| Temperature range of media from | -30 |
| Temperature range of media to | 100 |
| Type Pressure Switch | High accuracy |
| Weight | 100 |
| Vibration Resistance | 10g: 5..200 Hz sine wave, DIN EN 60068-2-6 |
| Voltage AC / DC Max | 48 |

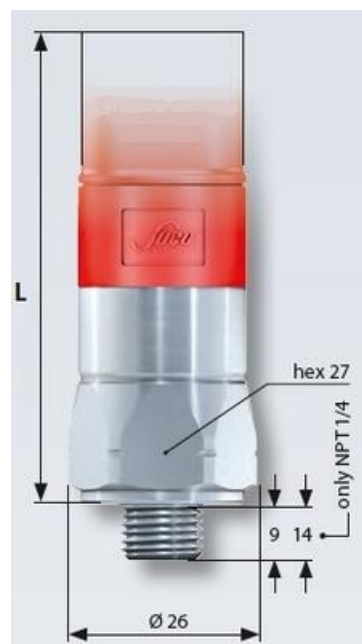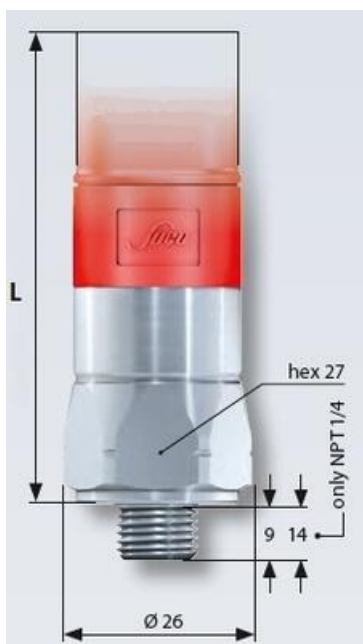

04 / 0135



M12x1 DIN EN 61076-2-101A
Contact assignment
DIN 60947-5-2
IP67

L ~ 65 mm

