



SUCO - 0165 ATEX PRESSURE SWITCH

ATEX rated

0165448141001

1..6 bar, G1/4 female, CO, NBR, 2m cable, Ex, Aluminium

- Gas protected zones 1 and 2
- Up to 250 V
- Five adjustment ranges from 1..6 bar to 100..400 bar
- Changeover (SPDT)
- Over pressure safety from 200 bar up to 600 bar



Product description


The 0165 series pressure switch is part of the ATEX range from SUCO for gas zones 1 and 2 offering adjustment while in operation. Pg9 cable gland connector and a maximum voltage of 250 V with a normally open and normally closed contact housed in a 30 A/F aluminium body offering a high pressure resistance. The switch point is very stable even after a long period of time and high load and can come pre-set.

Common applications include oil & gas, mills, foundries, chemical and process industries.

Specifications

Adjustment range max	6
Adjustment range min	1
Approvals	CSA US, Ex-d
Contact load max ac	1
Contact load max dc	0,25
Deviation max	±0,5
Electrical connection	Embedded 2m cable
Function	Changeover (SPDT)
IP Class	IP65
Material of body	Aluminium
Materials Wetted Parts	Aluminium, NBR
Max switching frequency/min	200

Max. pressure	200
Membrane Material	NBR
Pressure Range Max	6
Pressure Range Min	1
Pressure type	Relativt tryck
Process connection	G1/4 female
Temperature ambient from	-20
Temperature ambient to	80
Temperature range of media from	-20
Temperature range of media to	80
Type Pressure Switch	ATEX
Weight	380
Voltage AC / DC Max	250
Voltage AC / DC Min	10

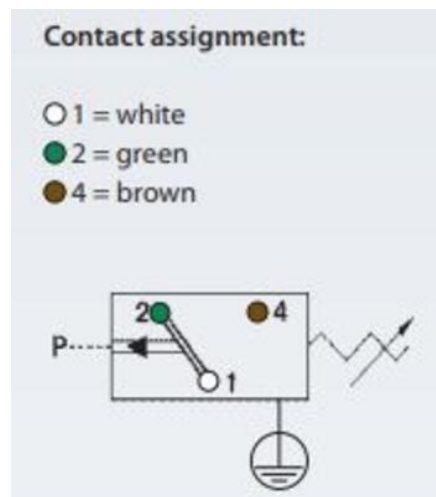

Contact assignment:

○ 1 = white

● 2 = green

● 4 = brown

