

## INSULATED BOOTLACE FERRULE FOR DUAL CABLES

V30AE001134

0.5mm<sup>2</sup> x 8mm Dual Ferrule - Orange

- Funnel feed-in made of polypropylene
- Heat resistant up to 120 °C
- For wires from 0.5...16 mm<sup>2</sup>
- Material: E-Cu/A-Cu, galvanically tin-plated

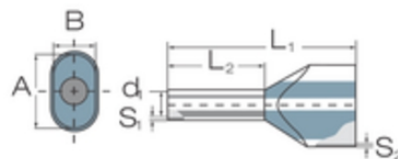


### Product description

### Specifications

<b>Color</b>	Orange
<b>Country of origin</b>	DE
<b>Cross Section Max</b>	0.5
<b>Diameter of tube</b>	1.4
<b>DIN 46228-1:1992</b>	No
<b>DIN 46228-4:1990</b>	Yes
<b>Length</b>	14
<b>Length of tube</b>	8
<b>Operating temperature from</b>	-5
<b>Operating temperature to</b>	105
<b>Pack Size</b>	500
<b>Rated wire cross section to (AWG)</b>	20
<b>Standard</b>	German Standard
<b>Stripping Length</b>	11
<b>Tariff code</b>	85369010
<b>Thickness of collar</b>	0.3

Weight	0.14
--------	------

[illegible]