

INSULATED BOOTLACE FERRULE FOR DUAL CABLES

V30AE000611

Bootlace Ferrules 2x2.5sq Blue (Pack 500)

- Funnel feed-in made of polypropylene
- Heat resistant up to 120 °C
- For wires from 0.5...16 mm²
- Material: E-Cu/A-Cu, galvanically tin-plated




Product description


Specifications

Color	Blue
Conductor tube	Copper alloy
Contact surface	Galvanic tin-plated, shiny
Country of origin	DE
Cross Section Max	2.5
Diameter of tube	2.8
DIN 46228-1:1992	No
DIN 46228-4:1990	Yes
Length	19
Length of tube	10
Operating temperature from	-5
Operating temperature to	105
Pack Size	500
Plastic collar	Polypropylene-homopolymer
Rated wire cross section to (AWG)	14
Standard	German/UL (DIN) Standard

Stripping Length	13
Tariff code	85369010
Thickness of collar	0.4
Thickness of tube	0.15
Weight	0.33

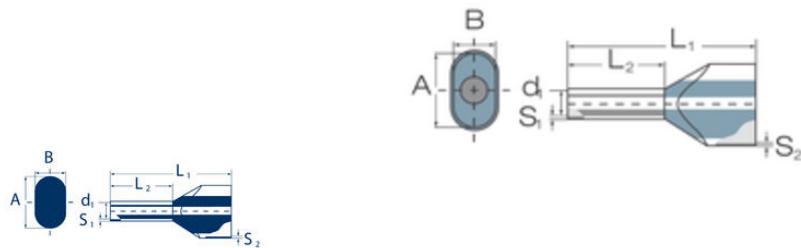

Bestimmung Description	AWG	Fabcode/Bestell-Nr. Cable size/Order No.			Nennmaße mm Dimensions mm							Stück Pcs/box				
Best.	Typ	Zur	DN	HTS	L ₁	L ₂	d ₁	d ₂	A	B	WPE					
2 x 0.34	8	N	2 x 22	V504E005684	V504E005684				15	8	1.2	0.15	0.25	3.5	2	500
2 x 0.8	8	N	2 x 20	V504E001154	V504E001145				14	8.5	1.4	0.15	0.3	8	3	500
2 x 0.8	10	HL	2 x 20	V504E001158	V504E001148				16	10	1.4	0.15	0.3	8	3	500
2 x 0.8	12	L	2 x 20	V504E001156	V504E001147				16	12	1.4	0.15	0.3	8	3	500
2 x 0.75	8	N	2 x 18	V504E005608	V504E001061				14	8	1.7	0.15	0.3	5.5	3	500
2 x 0.75	10	HL	2 x 18	V504E001131	V504E001107				16	10	1.7	0.15	0.3	5.5	3	500
2 x 0.75	12	HL	2 x 18	V504E005686	V504E001061				16	12	1.7	0.15	0.3	5.5	3	500
2 x 0.75	18	L	2 x 18	V504E001140	V504E001108				24	18	1.7	0.15	0.3	5.5	3	500
2 x 1	8	N	2 x 16	V504E000095	V504E000095				12	8	2	0.15	0.3	5.8	3.2	500
2 x 1	12	HL	2 x 16	V504E001135	V504E001135				19	12	2	0.15	0.3	5.8	3.2	500
2 x 1	14	HL	2 x 16	V504E005650	V504E005654				21	14	2	0.15	0.3	5.8	3.2	500
2 x 1	18	L	2 x 16	V504E001143	V504E001143				26	18	2	0.15	0.3	5.8	3.2	500
2 x 1.5	8	N	2 x 16	V504E005655	V504E005655				17	8	2.3	0.15	0.3	6.5	3.6	500
2 x 1.5	12	HL	2 x 16	V504E001137	V504E001138				20	12	2.3	0.15	0.3	6.5	3.6	500
2 x 1.5	18	L	2 x 16	V504E001144	V504E001145				26	18	2.3	0.15	0.3	6.5	3.6	500
2 x 2.5	10	N	2 x 14	V504E000091	V504E000091				19	10	2.8	0.2	0.4	8	4.5	500
2 x 2.5	12	HL	2 x 14	V504E001148	V504E001148				21	12	2.8	0.2	0.4	8	4.5	500
2 x 2.5	18	L	2 x 14	V504E001150	V504E001150				27	18	2.8	0.2	0.4	8	4.5	500
2 x 4	12	N	2 x 12	V504E001145	V504E001145				22	12	3.8	0.2	0.5	9	5.2	500
2 x 4	16	L	2 x 12	V504E001149	V504E001149				28	16	3.8	0.2	0.5	9	5.2	500
2 x 6	12	N	2 x 10	V504E001153	V504E001153				23	12	4.8	0.2	0.5	11.4	6.2	500
2 x 6	16	L	2 x 10	V504E001140	V504E001151				29	16	4.8	0.2	0.5	11.4	6.2	500
2 x 10	12	N	2 x 8	V504E001151	V504E001152				24	12	5.8	0.2	0.5	16.4	7.6	500
2 x 10	16	L	2 x 8	V504E001142	V504E001153				30	16	5.8	0.2	0.5	16.4	7.6	500
2 x 10	18	N	2 x 8	V504E001143	V504E001154				29	18	5.8	0.2	0.5	17.2	8.6	500
2 x 10	20	L	2 x 8	V504E001144	V504E001155				38	20	5.8	0.2	0.5	17.2	8.6	500

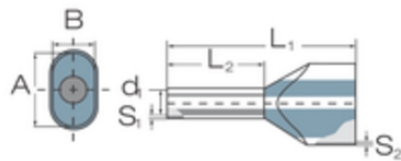

Bestimmung Description	AWG	Fabcode/Bestell-Nr. Cable size/Order No.				Nennmaße mm Dimensions mm							Stück Pcs/box			
Bestimmung Description	AWG	Zur To	DN To	HTS To	L ₁ L ₁	L ₂ L ₂	d ₁ d ₁	d ₂ d ₂	A A	B B	WPE WPE	Stück Pcs/box				
2 x 0.34	8	N	2 x 22	V504E005684	V504E005684				15	8	1.2	0.15	0.25	3.5	2	500
2 x 0.8	8	N	2 x 20	V504E001154	V504E001145				14	8.5	1.4	0.15	0.3	8	3	500
2 x 0.8	10	HL	2 x 20	V504E001158	V504E001148				16	10	1.4	0.15	0.3	8	3	500
2 x 0.8	12	L	2 x 20	V504E001156	V504E001147				16	12	1.4	0.15	0.3	8	3	500
2 x 0.75	8	N	2 x 18	V504E005608	V504E001061				14	8	1.7	0.15	0.3	5.5	3	500
2 x 0.75	10	HL	2 x 18	V504E001131	V504E001107				16	10	1.7	0.15	0.3	5.5	3	500
2 x 0.75	12	HL	2 x 18	V504E005686	V504E001061				16	12	1.7	0.15	0.3	5.5	3	500
2 x 0.75	18	L	2 x 18	V504E001140	V504E001108				24	18	1.7	0.15	0.3	5.5	3	500
2 x 1	8	N	2 x 16	V504E000095	V504E000095				12	8	2	0.15	0.3	5.8	3.2	500
2 x 1	12	HL	2 x 16	V504E001135	V504E001135				19	12	2	0.15	0.3	5.8	3.2	500
2 x 1	14	HL	2 x 16	V504E005650	V504E005654				21	14	2	0.15	0.3	5.8	3.2	500
2 x 1	18	L	2 x 16	V504E001143	V504E001143				26	18	2	0.15	0.3	5.8	3.2	500
2 x 1.5	8	N	2 x 16	V504E005655	V504E005655				17	8	2.3	0.15	0.3	6.5	3.6	500
2 x 1.5	12	HL	2 x 16	V504E001137	V504E001138				20	12	2.3	0.15	0.3	6.5	3.6	500
2 x 1.5	18	L	2 x 16	V504E001144	V504E001145				26	18	2.3	0.15	0.3	6.5	3.6	500
2 x 2.5	10	N	2 x 14	V504E000091	V504E000091				19	10	2.8	0.2	0.4	8	4.5	500
2 x 2.5	12	HL	2 x 14	V504E001148	V504E001148				21	12	2.8	0.2	0.4	8	4.5	500
2 x 2.5	18	L	2 x 14	V504E001150	V504E001150				27	18	2.8	0.2	0.4	8	4.5	500
2 x 4	12	N	2 x 12	V504E001145	V504E001145				22	12	3.8	0.2	0.5	9	5.2	500
2 x 4	16	L	2 x 12	V504E001149	V504E001149				28	16	3.8	0.2	0.5	9	5.2	500
2 x 6	12	N	2 x 10	V504E001153	V504E001153				23	12	4.8	0.2	0.5	11.4	6.2	500
2 x 6	16	L	2 x 10	V504E001140	V504E001151				29	16	4.8	0.2	0.5	11.4	6.2	500
2 x 10	12	N	2 x 8	V504E001151	V504E001152				24	12	5.8	0.2	0.5	16.4	7.6	500
2 x 10	16	L	2 x 8	V504E001142	V504E001153				30	16	5.8	0.2	0.5	16.4	7.6	500
2 x 10	18	N	2 x 8	V504E001143	V504E001154				29	18	5.8	0.2	0.5	17.2	8.6	500
2 x 10	20	L	2 x 8	V504E001144	V504E001155				38	20	5.8	0.2	0.5	17.2	8.6	500