

INSULATED BOOTLACE FERRULE FOR DUAL CABLES

V30AE003122

Bootlace Ferrules 2x10sq-14 (Pack 100) brown

- Funnel feed-in made of polypropylene
- Heat resistant up to 120 °C
- For wires from 0.5...16 mm²
- Material: E-Cu/A-Cu, galvanically tin-plated




Product description


Specifications

Color	Brown
Conductor tube	Copper alloy
Contact surface	Galvanic tin-plated, shiny
Country of origin	EEC
Cross Section Max	10
Diameter of tube	5.8
DIN 46228-1:1992	No
DIN 46228-4:1990	Yes
Length	24
Length of tube	12
Operating temperature from	-5
Operating temperature to	105
Pack Size	100
Plastic collar	Polypropylene-homopolymer
Rated wire cross section to (AWG)	8
Standard	French Standard

Stripping Length	17
Tariff code	85369010
Thickness of collar	0.5
Thickness of tube	0.2
Weight	0.81

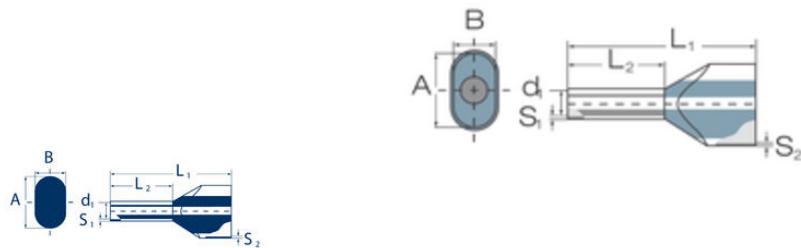

Bestimmung Description	AWG	Fabcode/Bestell-Nr. Cable size/Order No.			Nennmaße mm Dimensions mm								Stück Pcs/box				
Best.	Typ	Typ	Zur	DN	HTS	L ₁	L ₂	d ₁	d ₂	S ₁	A	B	WPE				
2 x 0.34	8	N	2 x 22	V504E005684	V504E005684					15	8	1.2	0.15	0.25	3.5	2	500
2 x 0.5	8	N	2 x 20	V504E005734	V504E005734					14	8.5	1.4	0.15	0.3	8	3	500
2 x 0.5	10	HL	2 x 20	V504E005738	V504E005738					16	10	1.4	0.15	0.3	8	3	500
2 x 0.5	12	L	2 x 20	V504E005736	V504E005736					16	12	1.4	0.15	0.3	8	3	500
2 x 0.75	8	N	2 x 18	V504E005698	V504E005698					14	8	1.7	0.15	0.3	5.5	3	500
2 x 0.75	10	HL	2 x 18	V504E005731	V504E005731					16	10	1.7	0.15	0.3	5.5	3	500
2 x 0.75	12	HL	2 x 18	V504E005698	V504E005698					16	12	1.7	0.15	0.3	5.5	3	500
2 x 0.75	18	L	2 x 18	V504E005740	V504E005740					21	18	1.7	0.15	0.3	5.5	3	500
2 x 1	8	N	2 x 16	V504E005695	V504E005695					12	8	2	0.15	0.3	5.8	3.2	500
2 x 1	12	HL	2 x 16	V504E005735	V504E005735					19	12	2	0.15	0.3	5.8	3.2	500
2 x 1	14	HL	2 x 16	V504E005695	V504E005695					21	14	2	0.15	0.3	5.8	3.2	500
2 x 1	18	L	2 x 16	V504E005743	V504E005743					24	18	2	0.15	0.3	5.8	3.2	500
2 x 1.5	8	N	2 x 14	V504E005693	V504E005693					10	8	2.3	0.15	0.3	6.5	3.6	500
2 x 1.5	12	HL	2 x 14	V504E005737	V504E005737					20	12	2.3	0.15	0.3	6.5	3.6	500
2 x 1.5	18	L	2 x 14	V504E005744	V504E005744					28	18	2.3	0.15	0.3	6.5	3.6	500
2 x 2.5	10	N	2 x 14	V504E005691	V504E005691					19	10	2.8	0.2	0.4	8	4.5	500
2 x 2.5	12	HL	2 x 14	V504E005745	V504E005745					21	12	2.8	0.2	0.4	8	4.5	500
2 x 2.5	18	L	2 x 14	V504E005750	V504E005750					27	18	2.8	0.2	0.4	8	4.5	500
2 x 4	12	N	2 x 12	V504E005748	V504E005748					22	12	3.8	0.2	0.5	9	5.2	500
2 x 4	16	L	2 x 12	V504E005749	V504E005749					28	16	3.8	0.2	0.5	9	5.2	500
2 x 6	10	N	2 x 10	V504E005753	V504E005753					23	10	4.8	0.2	0.5	11.4	6.2	500
2 x 6	16	L	2 x 10	V504E005740	V504E005740					29	16	4.8	0.2	0.5	11.4	6.2	500
2 x 10	12	N	2 x 8	V504E005711	V504E005711					24	12	5.8	0.2	0.5	16.4	7.6	500
2 x 10	16	L	2 x 8	V504E005742	V504E005742					30	16	5.8	0.2	0.5	16.4	7.6	500
2 x 16	18	N	2 x 6	V504E005741	V504E005741					29	18	6.3	0.3	0.6	17.2	8.6	500
2 x 16	28	L	2 x 6	V504E005744	V504E005744					38	28	6.3	0.3	0.6	17.2	8.6	500

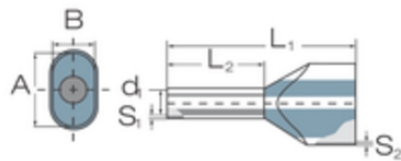

Bestimmung Description	AWG	Fabcode/Bestell-Nr. Cable size/Order No.				Nennmaße mm Dimensions mm								Stück Pcs/box			
core	type	type	Zur	DN	HTS	L ₁	L ₂	d ₁	d ₂	S ₁	A	B	WPE				
2 x 0.34	8	N	2 x 22	V504E005684	V504E005684					15	8	1.2	0.15	0.25	3.5	2	500
2 x 0.5	8	N	2 x 20	V504E005734	V504E005734					14	8.5	1.4	0.15	0.3	8	3	500
2 x 0.5	10	HL	2 x 20	V504E005738	V504E005738					16	10	1.4	0.15	0.3	8	3	500
2 x 0.5	12	L	2 x 20	V504E005736	V504E005736					16	12	1.4	0.15	0.3	8	3	500
2 x 0.75	8	N	2 x 18	V504E005698	V504E005698					14	8	1.7	0.15	0.3	5.5	3	500
2 x 0.75	10	HL	2 x 18	V504E005731	V504E005731					16	10	1.7	0.15	0.3	5.5	3	500
2 x 0.75	12	HL	2 x 18	V504E005698	V504E005698					16	12	1.7	0.15	0.3	5.5	3	500
2 x 0.75	18	L	2 x 18	V504E005740	V504E005740					21	18	1.7	0.15	0.3	5.5	3	500
2 x 1	8	N	2 x 16	V504E005695	V504E005695					12	8	2	0.15	0.3	5.8	3.2	500
2 x 1	12	HL	2 x 16	V504E005735	V504E005735					19	12	2	0.15	0.3	5.8	3.2	500
2 x 1	14	HL	2 x 16	V504E005695	V504E005695					21	14	2	0.15	0.3	5.8	3.2	500
2 x 1	18	L	2 x 16	V504E005743	V504E005743					24	18	2	0.15	0.3	5.8	3.2	500
2 x 1.5	8	N	2 x 14	V504E005693	V504E005693					10	8	2.3	0.15	0.3	6.5	3.6	500
2 x 1.5	12	HL	2 x 14	V504E005737	V504E005737					20	12	2.3	0.15	0.3	6.5	3.6	500
2 x 1.5	18	L	2 x 14	V504E005744	V504E005744					28	18	2.3	0.15	0.3	6.5	3.6	500
2 x 2.5	10	N	2 x 14	V504E005691	V504E005691					19	10	2.8	0.2	0.4	8	4.5	500
2 x 2.5	12	HL	2 x 14	V504E005745	V504E005745					21	12	2.8	0.2	0.4	8	4.5	500
2 x 2.5	18	L	2 x 14	V504E005750	V504E005750					27	18	2.8	0.2	0.4	8	4.5	500
2 x 4	12	N	2 x 12	V504E005748	V504E005748					22	12	3.8	0.2	0.5	9	5.2	500
2 x 4	16	L	2 x 12	V504E005749	V504E005749					28	16	3.8	0.2	0.5	9	5.2	500
2 x 6	10	N	2 x 10	V504E005753	V504E005753					23	10	4.8	0.2	0.5	11.4	6.2	500
2 x 6	16	L	2 x 10	V504E005740	V504E005740					29	16	4.8	0.2	0.5	11.4	6.2	500
2 x 10	12	N	2 x 8	V504E005711	V504E005711					24	12	5.8	0.2	0.5	16.4	7.6	500
2 x 10	16	L	2 x 8	V504E005742	V504E005742					30	16	5.8	0.2	0.5	16.4	7.6	500
2 x 16	18	N	2 x 6	V504E005741	V504E005741					29	18	6.3	0.3	0.6	17.2	8.6	500
2 x 16	28	L	2 x 6	V504E005744	V504E005744					38	28	6.3	0.3	0.6	17.2	8.6	500