
GSM-TMM SIMPLE SMS MODULE

GSM-TMM

16489.2
GSM-TMM, Auto Send SMS Module, 10…30V dc, 24V ac

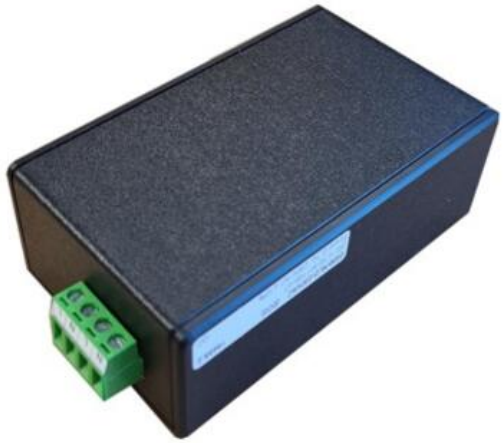

- SMS Send on Power Up
- 230V AC and 12VDC/24VADC versions available
- Simple programming
- Supporting LTE-M, NB-IOT, 2G
- LED status indication

PRODUCT DESCRIPTION

Simple compact SMS device that sends a single SMS to 1-5 recipients on power up, with or without confirmation.

The GSM-TMM (Trigger Message Module) can be wired in series or parallel with any powered device, such as beacon, sounders or switched output.
The unit can be programmed via USB (no external power required for programming)

Standard micro SIM, SMA antenna connection.

SPECIFICATIONS

Length	106
Width	54
Height	39

SIM card	Nano-SIM
Tariff code	85176990
Number of inputs	1
Stripping Length	6
2G	Quad-band GSM bands: 850, 900, 1800 and 1900 MHz
3G	LTE CAT-M: B1/B2/B3/B4/B5/B8/B12/B13/B14/B18/B19/B20/B25/B26/B27/B28/B66/B85
Pack Size	1
Supply voltage	10..30V dc; 24V ac ±10%
Operating temperature from	-30
Operating temperature to	70

Weight	147
Antenna GSM	50 Ohm, SMA-plug
Country of origin	NL
Cross section single wire from	0.2
Cross section single wire to	2.5
Current consumption	12V-170mA; 24V-85mA; 24VAC ~210mA
DIN-VDE Spec	Low Voltage Directive (LVD) 2014/35/EU, according requirements of EN 62477-1 Directive 2014/30/EU, in compliance with EN 55011 and EN 61326-1, RED 2014/53/EU
Electromagnetic Compatibility	EN55011, EN61326-1
GPS	No
IP Class	IP20





