



## POWER SUPPLY 1-PHASE, 48 V DC DIMENSION Q SERIES

QS10.481

PSU 100-240V ac I/P 48V dc 5A 240W O/P

- Output current of 5 A or 10 A
- From 60 mm wide
- Up to 94.3% efficiency
- 50% bonus power
- Maximum performance



### PRODUCT DESCRIPTION

The most outstanding features of this Dimension Q Series DIN-rail power supply are the high efficiency and the small size, which are achieved by a synchronous rectification and further novel design details.

With short-term peak power capability of 150% and built-in large sized output capacitors, these features help start motors, charge capacitors and absorb reverse energy and often allow a unit of a lower wattage class to be used.

High immunity to transients and power surges as well as low electromagnetic emission makes usage in nearly every environment possible.

The integrated output power manager, a wide range input voltage design and virtually no input inrush current make installation and usage simple.

Diagnostics are easy due to the dry DC-ok contact, a green DC-ok LED and red overload LED.

Unique quick-connect spring-clamp terminals allow a safe and fast installation and a large international approval package for a variety of applications makes this unit suitable for nearly every situation.

### SPECIFICATIONS

Active Transient	Yes
Approvals	ABS, CB, CE, CSA, GL, UL
DC relay output	Yes
Depth	117
Effect	240
Efficiency At 120 V AC, full load. Typical	91.2
Efficiency At 230 V AC, full load. Typical	92
Efficiency At 230 V AC. Typical	90.3
Height	124
Hold-up time at 120 V AC, full load. Typical.	27
Hold-up time at 230 V AC, full load. Typical.	28

Input voltage AC	100-240 V
Input voltage ac max	276
Input voltage ac min	90
Input voltage DC	110-150 V
Input voltage dc max	187
Input voltage dc min	88
Input voltage range	Wide-range
Inrush current at 120 V ac typical	4
Inrush current at 230 V ac typical	7
IP Class	IP20
Lifetime at 120 V ac, full load and +40 ° C	67000
Lifetime at 230 V ac, full load and +40 ° C	81000
MTBF (IEC 61709) 230 V AC, Maximum Load, 40 ° C	606000
Number of phases	1
Output Current	5
Output voltage	48
Output voltage max	56
Output voltage min	48
Power Consumption At 120 V AC	2.22
Power Consumption At 230 V AC	1.22
Power Factor at 120 V AC, full load. Typical	0.98
Power Factor at 230 V AC, full load. Typical	0.92
Power Reduction Of 60 To 70 ° C	6
Ripple. max	100
Series	Dimension Q
Supply Frequency	50-60 ±6 %
Temperature Range Without Derating From	-25
Temperature Range Without Derating To	60
Weight	0.9
Width	60

Fig. 6-1 Output voltage vs. output current, typ.

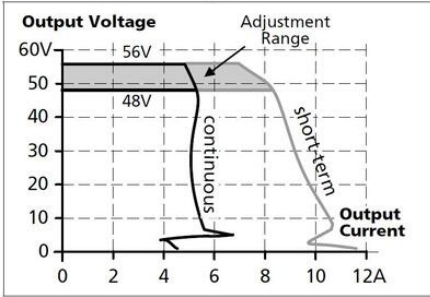


Fig. 15-1 Output current vs. ambient temp.

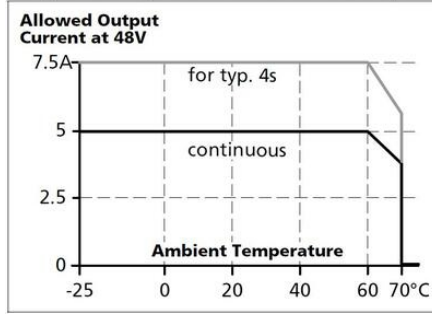


Fig. 9-1 Efficiency vs. output current at 48V, typ.

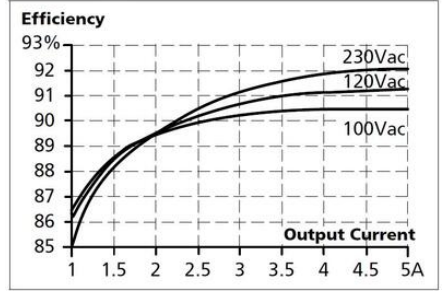


Fig. 9-2 Losses vs. output current at 48V, typ.


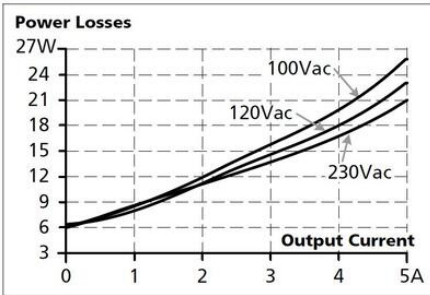


Fig. 6-2 Bonus time vs. output power

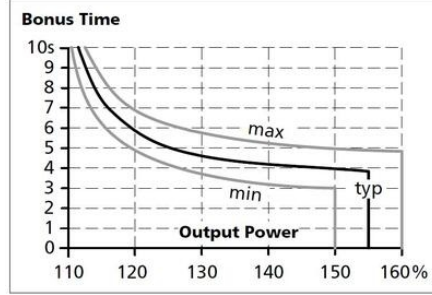


Maximal wire length\*) for a fast (magnetic) tripping:

	0.75mm <sup>2</sup>	1.0mm <sup>2</sup>	1.5mm <sup>2</sup>	2.5mm <sup>2</sup>
C-2A	58m	64m	104m	143m
C-3A	41m	53m	73m	124m
C-4A	18m	31m	54m	94m
C-6A	10m	14m	21m	33m
C-8A	4m	6m	8m	13m
C-10A	3m	4m	7m	10m
B-6A	19m	28m	39m	75m
B-10A	8m	12m	16m	29m
B-13A	7m	9m	13m	23m

Fig. 13-1 Front side



Fig. 20-1 Front view

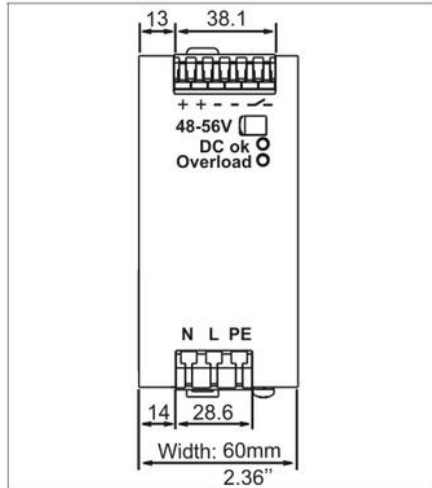

Side view

