

KUEBLER - ABSOLUTE-CODED ANGULAR TRANSMITTER SENDIX 5868/5888, OPTICAL, CANOPEN, Ø58 MM SERIE 5868 CANOPEN

- Housing diameter Ø58 mm
- CANopen / CANopenLift
- High shock resistance
- High enclosure class



PRODUCT DESCRIPTION

Sendix 5868/5888 is a multivariate fieldbus transmitter with profibus in robust design. Thanks to the construction of Safety-Lock™ as well as the fully cast housing, the sensor is able to handle even the more demanding applications where there are high demands on the sensor. The wide temperature range combined with the high enclosure class allows the sensor to be used outdoors as well as applications where large temperature changes occur. Sendix 5868/5888 has LED indication which facilitates diagnosis of the sensor and a set button that facilitates calibration.

Please refer to the image below for ordering information.

Order code	8.5868 . XXXX . XXXX							
Shaft version	Type	a	b	c	d	e	f	
a Flange		1 = clamping flange, IP65 ø 58 mm [2.28"] 3 = clamping flange, IP67 ø 58 mm [2.28"]						
		2 = synchro flange, IP65 ø 58 mm [2.28"] 4 = synchro flange, IP67 ø 58 mm [2.28"] 5 = square flange, IP65 □ 63.5 mm [2.5"] 7 = square flange, IP67 □ 63.5 mm [2.5"]						
b Shaft (ø x L), with flat		1 = 6 x 10 mm [0.24 x 0.39"] ¹⁾ 2 = 10 x 20 mm [0.39 x 0.79"] ²⁾ 3 = 1/4" x 7/8" 4 = 3/8" x 7/8"						
c Interface / power supply		2 = CANopen DS301 V4.02, 10 ... 30 V DC 5 = CANopen DS301 V4.02, 10 ... 30 V DC with 2048 ppr incremental track (TTL-compatible) ³⁾						
d Type of connection					removable bus terminal cover 1 = radial cable gland 2 = 2 x or 3 x M12 connector, 5-pin <i>Fixed connection without bus terminal cover</i> A = radial cable, 2 m [6.56'] PVC B = radial cable, special length PVC *) E = 1 x radial M12 connector, 5-pin F = 2 x radial M12 connector, 5-pin I = 1 x radial M23 connector, 12-pin J = 2 x radial M23 connector, 12-pin K = 1 x Sub-D connector, 9-pin *) Available special lengths (connection type B): 3, 5, 8, 10, 15 m [9.84, 16.40, 26.25, 32.80, 49.21'] order code expansion .XXXX = length in dm ex.: 8.5868.112B.2123.0030 (for cable length 3 m)			
e Fieldbus profile						212 = CANopen 221 = CANlift DS417 V1.01		
f Options (service)						2 = no options 3 = SET button		
Optional on request						- Ex 2/22 ⁴⁾ - surface protection salt spray tested - seawater resistant (stainless steel V4A)		
Salt spray tested / stainless steel V4A as standard types (deliverable as from 1 unit)						salt spray tested: 8.5868.3222.2122-C stainless steel V4A: 8.5868.3222.2122-V4A 1.4404		

Order code
Hollow shaft

8.5888
Type

. **X** **X** **X** **X** . **X** **X** **X** **X**
a b c d e f

a Flange

- 1 = with spring element, long, IP65
- 2 = with spring element, long, IP67
- 3 = with stator coupling, IP65 ø 65 mm [2.56"]
- 4 = with stator coupling, IP67 ø 65 mm [2.56"]
- 5 = with stator coupling, IP65 ø 63 mm [2.48"]**
- 6 = with stator coupling, IP67 ø 63 mm [2.48"]

b Blind hollow shaft

- (insertion depth max. 30 mm [1.18"])
- 3 = ø 10 mm [0.39"]
 - 4 = ø 12 mm [0.47"]**
 - 5 = ø 14 mm [0.55"]
 - 6 = ø 15 mm [0.59"]
 - 8 = ø 3/8"
 - 9 = ø 1/2"

c Interface / power supply

- 2 = CANopen DS301 V4.02, 10 ... 30 V DC**
- 5 = CANopen DS301 V4.02, 10 ... 30 V DC**
with 2048 ppr incremental track (TTL-compatible) ¹⁾

d Type of connection

- removable bus terminal cover*
- 1 = radial cable gland
 - 2 = 2 x or 3 x M12 connector, 5-pin**
Fixed connection without bus terminal cover
 - A = radial cable, 2 m [6.56'] PVC
 - B = radial cable, special length PVC *)
 - E = 1 x radial M12 connector, 5-pin
 - F = 2 x radial M12 connector, 5-pin
 - I = 1 x radial M23 connector, 12-pin
 - J = 2 x radial M23 connector, 12-pin
 - K = 1 x Sub-D connector, 9-pin


*) Available special lengths (connection type B):
3, 5, 8, 10, 15 m [9.84, 16.40, 26.25, 32.80, 49.21']
order code expansion .XXXX = length in dm
ex.: 8.5888.542B.2123.0030 (for cable length 3 m)

Optional on request

- Ex 2/22 ²⁾
- surface protection salt spray tested
- seawater resistant (stainless steel V4A)

Salt spray tested / stainless steel V4A as standard types (deliverable as from 1 unit)

 salt spray tested:
8.5888.2422.2122-C
8.5888.2522.2122-C

 **V4A**
1.4404
stainless steel V4A:
8.5888.2422.2122-V4A

e Fieldbus profile


- 212 = CANopen**
- 221 = CANlift DS417 V1.01










f Options (service)

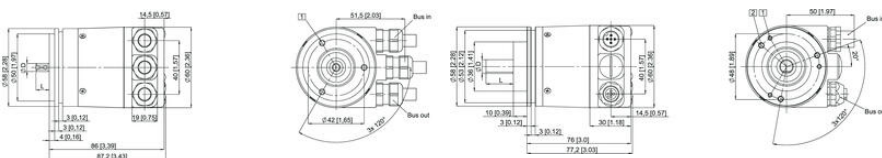







- 2 = no options
- 3 = SET button**

SPECIFICATIONS

Housing diameter	58
IP Class	IP65, IP67
Resolution Envarv	16 bit (default: 13 bit)
Resolution More Yards	Max. 12 bit
Resolution Overall	28 bit (default: 25 bit)
Shaft Diameter max	10
Shaft Diameter min	6
Supply Voltage DC Max	30
Supply Voltage DC Min	10
Temperature range from	-40
Temperature range to	80



Interface	Type of connector	Cable gland (bus terminal cover with terminal box)	Bus OUT	Bus IN
2.5	1	Signal: CAN_GND, CAN_L, CAN_H, EV, +V, -V, CAN_L, CAN_H, CAN_GND Abbreviation: CG, CL, CH, EV, +V, -V, CL, CH, CG		
Interface	Type of connector	Cable (insulate around wires individually before initial start up)	Bus IN	
2.5	A, B	Signal: EV, +V, CAN_L, CAN_H, CAN_GND Cable colour: BRN, BRN, VE, GRN, GRN		
Interface	Type of connector	2 x M12 connector (3 x M12 connector with interface 5)	Bus OUT	Bus IN
2.5	3, F	Signal: EV, +V, CAN_L, CAN_H, CAN_GND Pin: 3, 3, 5, 4, 1		
		Signal: EV, +V, CAN_L, CAN_H, CAN_GND Pin: 3, 3, 5, 4, 1	Bus IN	
5	2	Signal: Incremental track Pin: 1, 2, 3, 4, 5		
		Signal: A, B, B, B, EV Pin: 1, 2, 3, 4, 5		
Interface	Type of connector	1 x M12 connector	Bus IN	
2.5	E	Signal: EV, +V, CAN_L, CAN_H, CAN_GND Pin: 3, 3, 5, 4, 1		
Interface	Type of connector	2 x M12 connector	Bus OUT	Bus IN
2.5	F	Signal: EV, +V, CAN_L, CAN_H, CAN_GND Pin: 10, 12, 2, 7, 3		
		Signal: EV, +V, CAN_L, CAN_H, CAN_GND Pin: 10, 12, 2, 7, 3	Bus IN	
Interface	Type of connector	1 x M12 connector	Bus IN	
2.5	G	Signal: EV, +V, CAN_L, CAN_H, CAN_GND Pin: 10, 12, 2, 7, 3		
Interface	Type of connector	Sub-D connector	Bus IN	
2.5	H	Signal: EV, +V, CAN_L, CAN_H, CAN_GND Pin: 6, 9, 3, 7, 3		

Interface	Type of connector	Cable gland (bus terminal cover with terminal box)	Bus OUT	Bus IN
2.5	1	Signal: CAN_GND, CAN_L, CAN_H, EV, +V, -V, CAN_L, CAN_H, CAN_GND Abbreviation: CG, CL, CH, EV, +V, -V, CL, CH, CG		
Interface	Type of connector	Cable (insulate around wires individually before initial start up)	Bus IN	
2.5	A, B	Signal: EV, +V, CAN_L, CAN_H, CAN_GND Cable colour: BRN, BRN, VE, GRN, GRN		
Interface	Type of connector	2 x M12 connector (3 x M12 connector with interface 5)	Bus OUT	Bus IN
2.5	3, F	Signal: EV, +V, CAN_L, CAN_H, CAN_GND Pin: 3, 3, 5, 4, 1		
		Signal: EV, +V, CAN_L, CAN_H, CAN_GND Pin: 3, 3, 5, 4, 1	Bus IN	
5	2	Signal: Incremental track Pin: 1, 2, 3, 4, 5		
		Signal: A, B, B, B, EV Pin: 1, 2, 3, 4, 5		
Interface	Type of connector	1 x M12 connector	Bus IN	
2.5	E	Signal: EV, +V, CAN_L, CAN_H, CAN_GND Pin: 3, 3, 5, 4, 1		
Interface	Type of connector	2 x M12 connector	Bus OUT	Bus IN
2.5	F	Signal: EV, +V, CAN_L, CAN_H, CAN_GND Pin: 10, 12, 2, 7, 3		
		Signal: EV, +V, CAN_L, CAN_H, CAN_GND Pin: 10, 12, 2, 7, 3	Bus IN	
Interface	Type of connector	1 x M12 connector	Bus IN	
2.5	G	Signal: EV, +V, CAN_L, CAN_H, CAN_GND Pin: 10, 12, 2, 7, 3		
Interface	Type of connector	Sub-D connector	Bus IN	
2.5	H	Signal: EV, +V, CAN_L, CAN_H, CAN_GND Pin: 6, 9, 3, 7, 3		