

KUEBLER - ABSOLUTE-CODED ANGULAR TRANSMITTER SENDIX 5868/5888, OPTICAL, ETHERCAT, Ø58 MM

SERIE 5868 ETHERCAT

- Housing diameter Ø58 mm
- EtherCAT
- Safety-Lock™
- High enclosure class



PRODUCT DESCRIPTION

Sendix 5868/5888 is a multifarious sensor with EtherCAT in robust design. Thanks to the construction of Safety-Lock™ as well as the fully cast housing, the sensor is able to handle even the more demanding applications where there are high demands on the sensor. The wide temperature range combined with the high enclosure class allows the sensor to be used both outdoors and in applications where large temperature changes occur

Please refer to the image below for ordering information.


Order code	8.5868	.XXB2.	B2 12	
Shaft version	Type	a b c d	e	
a Flange	1 = clamping flange, IP65 ø 58 mm [2.28"] 3 = clamping flange, IP67 ø 58 mm [2.28"] 2 = synchro flange, IP65 ø 58 mm [2.28"] 4 = synchro flange, IP67 ø 58 mm [2.28"] 5 = square flange, IP65 □ 63.5 mm [2.5"] 7 = square flange, IP67 □ 63.5 mm [2.5"]	b Shaft (ø x L), with flat 1 = 6 x 10 mm [0.24 x 0.39"]¹⁾ 2 = 10 x 20 mm [0.39 x 0.79"]²⁾ 3 = 1/4" x 7/8" 4 = 3/8" x 7/8"	c Interface / power supply B = EtherCAT / 10 ... 30 V DC d Type of connection removable bus terminal cover 2 = 3 x M12 connector, 4-pin e Fieldbus profile B2= EtherCAT with CoE (CAN over EtherNet)	<i>Optional on request</i> - Ex 2/22 - surface protection salt spray tested

Order code	8.5888	.XXB2.	B2 12	
Hollow shaft	Type	a b c d	e	
a Flange	1 = with spring element, long, IP65 2 = with spring element, long, IP67 3 = with stator coupling, IP65 ø 65 mm [2.56"] 4 = with stator coupling, IP67 ø 65 mm [2.56"] 5 = with stator coupling, IP65 ø 63 mm [2.48"] 6 = with stator coupling, IP67 ø 63 mm [2.48"]	b Blind hollow shaft (insertion depth max. 30 mm [1.18"]) 3 = ø 10 mm [0.39"] 4 = ø 12 mm [0.47"] 5 = ø 14 mm [0.55"] 6 = ø 15 mm [0.59"] 8 = ø 3/8" 9 = ø 1/2"	c Interface / power supply B = EtherCAT / 10 ... 30 V DC d Type of connection removable bus terminal cover 2 = 3 x M12 connector, 4-pin e Fieldbus profile B2= EtherCAT with CoE (CAN over EtherNet)	<i>Optional on request</i> - Ex 2/22 - surface protection salt spray tested

SPECIFICATIONS

Housing diameter	58
IP Class	IP65, IP67
Resolution Envarv	16 bit (default: 13 bit)
Resolution More Yards	Max. 12 bit

Resolution Overall	28 bit (default: 25 bit)
Shaft Diameter max	10
Shaft Diameter min	6
Supply Voltage DC Max	30
Supply Voltage DC Min	10
Temperature range from	-40
Temperature range to	80

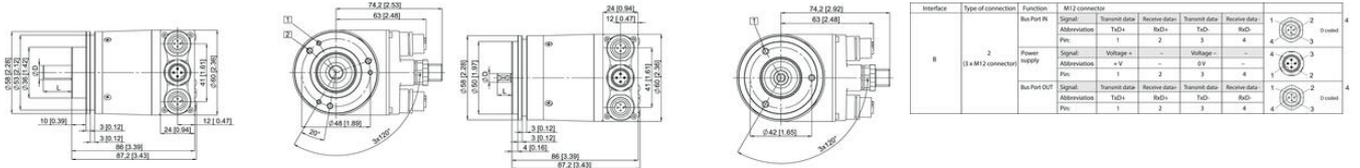

Interface	Type of connection	Function	M12 connector				Pin	Diagram
			Signal	Transmit data	Receive data	Transmit data		
B	2 (3 x M12 connector)	Bus Port IN	Signal	TrD+	ReD+	TrD-	ReD-	
		Abbreviation	TrD+	ReD+	TrD-	ReD-		
		Power	Signal	Voltage +	-	Voltage -	-	
		Abbreviation	+V	-	0V	-		
		Power	Signal	1	2	3	4	
		Abbreviation	TrD+	ReD+	TrD-	ReD-		

Interface	Type of connection	Function	M12 connector				Pin	Diagram
			Signal	Transmit data	Receive data	Transmit data		
B	2 (3 x M12 connector)	Bus Port IN	Signal	TrD+	ReD+	TrD-	ReD-	
		Abbreviation	TrD+	ReD+	TrD-	ReD-		
		Power	Signal	Voltage +	-	Voltage -	-	
		Abbreviation	+V	-	0V	-		
		Power	Signal	1	2	3	4	
		Abbreviation	TrD+	ReD+	TrD-	ReD-		