

KUEBLER - ABSOLUTE ENCODED ANGULAR TRANSMITTER SENDIX F5858 / F5878, OPTICAL, ETHERNET / IP, Ø58 MM

SERIE F5858

- Housing diameter Ø58 mm
- EtherNet/IP
- Safety-Lock™
- Quick startup



Product description

Sendix F5858 / F5878 is a one-way fieldbus transducer with EtherNet / IP in robust design. Thanks to the construction of Safety-Lock™ as well as the fully cast housing, the sensor is able to handle even the more demanding applications where there are high demands on the sensor. The wide temperature range combined with the high enclosure class allows the sensor to be used outdoors as well as applications where large temperature changes occur. Sendix F5858 / F5878 comes with LED indication which facilitates diagnosis of the sensor.


Please refer to the image below for ordering information.

| Order code Shaft version | 8.F5858 Type | .XXAN. | A222 | |
|-----------------------------|---|--|---|---|
| | | a b c d | e | |
| a Flange | 1 = clamping flange, IP65 ø 58 mm [2.28"] 2 = synchro flange, IP65 ø 58 mm [2.28"] 5 = square flange, IP65 □ 63.5 mm [2.5"] | b Shaft (ø x L), with flat 1 = 6 x 10 mm [0.24 x 0.39"] 2 = 10 x 20 mm [0.39 x 0.79"] 3 = 1/4" x 7/8" 4 = 3/8" x 7/8" | c Interface / Power supply A = EtherNet IP / 10 ... 30 V DC | e Fieldbus profile A2 = EtherNet/IP |
| | | | d Type of connection N = 3 x axial M12 connector, 4-pin | Optional on request - Ex 2/22 |

| Order code Hollow version | 8.F5878 Type | .XXAN. | A222 | |
|------------------------------|--|---|---|---|
| | | a b c d | e | |
| a Flange | 1 = with spring element long, IP65 3 = with stator coupling, IP65 ø 65 mm [2.56"] 5 = with stator coupling, IP65 ø 63 mm [2.48"] | b Blind hollow shaft (insertion depth max. 30 mm [1.18"]) A = ø 10 mm [0.39"] B = ø 12 mm [0.47"] C = ø 14 mm [0.55"] D = ø 15 mm [0.59"] E = ø 3/8" F = ø 1/2" | c Interface / Power supply A = EtherNet IP / 10 ... 30 V DC | e Fieldbus profile A2 = EtherNet/IP |
| | | | d Type of connection N = 3 x axial M12 connector, 4-pin | Optional on request - Ex 2/22 |

Specifications


| | |
|-------------------------------|------|
| Housing diametre | 58 |
| IP Class | IP65 |
| Shaft Diameter max | 10 |
| Shaft Diameter min | 6 |
| Supply Voltage DC Max | 30 |
| Supply Voltage DC Min | 10 |
| Temperature range from | -40 |
| Temperature range to | 80 |

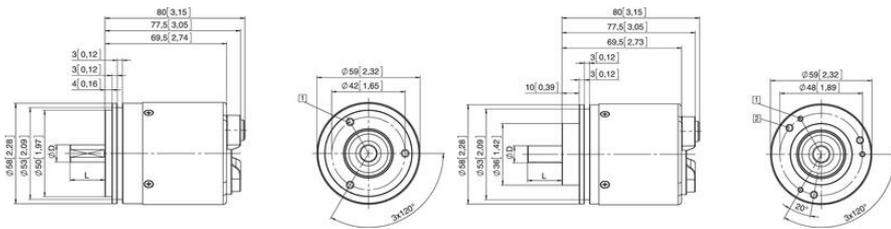

| Interface | Type of connector | Function | M12 connector 4 pin | | | | Pin | | |
|--------------|--------------------------|---------------|---------------------|---------------|--------------|---------------|--------------|---|---|
| A | N (3 x M12 connector) | Bus Part 1 | Signal: | Transmit data | Receive data | Transmit data | Receive data | 1 | 2 |
| | | Abbreviation | TxD+ | RxD+ | TxD- | RxD- | 4 | 3 | |
| | | Pin: | 1 | 2 | 3 | 4 | 4 | 3 | |
| | | Power | Voltage + | - | Voltage - | - | 4 | 3 | |
| | | Abbreviation | +V | - | 0V | - | 1 | 2 | |
| | | Pin: | 1 | 2 | 3 | 4 | 1 | 2 | |
| Bus Part 2 | Signal: | Transmit data | Receive data | Transmit data | Receive data | 1 | 2 | | |
| Abbreviation | TxD+ | RxD+ | TxD- | RxD- | 4 | 3 | | | |
| Pin: | 1 | 2 | 3 | 4 | 4 | 3 | | | |

Rear side connections and display elements

- 1 LED: Link 1
- 2 LED: Mod.
- 3 LED: Net.
- 4 LED: Encoder
- 5 LED: Link 2
- 6 Power
- 7 Port 1
- 8 Port 2
- 9 Switch: x1
- 10 Switch: x100
- 11 Switch: x10

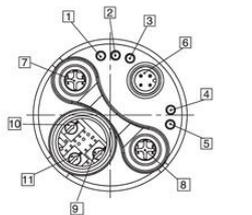

| Interface | Type of connector | Function | M12 connector 4 pin | | | | Pin | | |
|--------------|--------------------------|---------------|---------------------|---------------|--------------|---------------|--------------|---|---|
| A | N (3 x M12 connector) | Bus Part 1 | Signal: | Transmit data | Receive data | Transmit data | Receive data | 1 | 2 |
| | | Abbreviation | TxD+ | RxD+ | TxD- | RxD- | 4 | 3 | |
| | | Pin: | 1 | 2 | 3 | 4 | 4 | 3 | |
| | | Power | Voltage + | - | Voltage - | - | 4 | 3 | |
| | | Abbreviation | +V | - | 0V | - | 1 | 2 | |
| | | Pin: | 1 | 2 | 3 | 4 | 1 | 2 | |
| Bus Part 2 | Signal: | Transmit data | Receive data | Transmit data | Receive data | 1 | 2 | | |
| Abbreviation | TxD+ | RxD+ | TxD- | RxD- | 4 | 3 | | | |
| Pin: | 1 | 2 | 3 | 4 | 4 | 3 | | | |

Rear side connections and display elements

- 1 LED: Link 1
- 2 LED: Mod.
- 3 LED: Net.
- 4 LED: Encoder
- 5 LED: Link 2
- 6 Power
- 7 Port 1
- 8 Port 2
- 9 Switch: x1
- 10 Switch: x100
- 11 Switch: x10

