

TAKEX - F70 FIBRE AMPLIFIER WITH DIGITAL DISPLAY

F70R-PNP
FIBRE OPTIC AMPLIFIER RED PNP

- Teach In function
- High amplification, long distances
- Many setting options
- Small construction dimensions (9 mm)









Product description

Simple operation with the Teach In function. Setting may take place with both stationary objects and objects in motion. The F70 also has an LCD display showing information on reflection level, operation mode and light/dark on and time function. The hysteresis can also be adjusted manually. Interference protection for 2 units. Alarm output for uncertain signal level. External Teach In from e.g. PLC.

Specifications

Approvals	CE
Electrical connection	Embedded 2m cable
Function	Dark on / Light on
IP Class	IP40
Light / Dark Switching	Yes
Light type	Red LED
Output	PNP
Output current max	0.1
Photocell technology	Fiber amplified
Power consumption max	0.05
Reaction time	0.5
Temperature range from	-25
Temperature range to	55
Voltage DC max	24
Voltage DC min	12

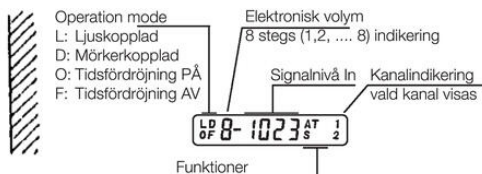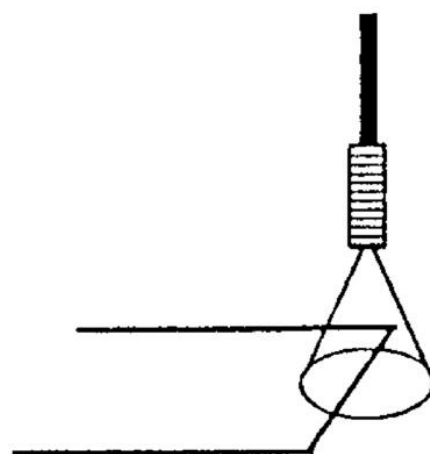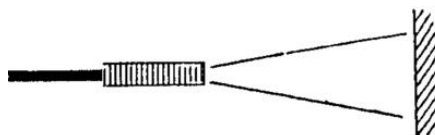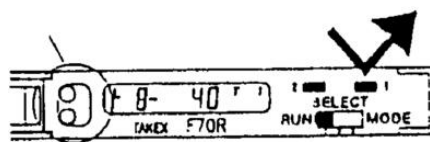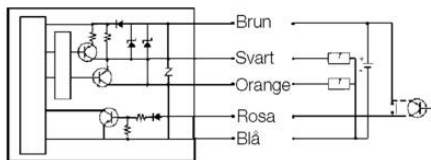

Operation mode
L: Ljuskopplad
D: Mörkerkopplad
O: Tidsfördröjning PÅ
F: Tidsfördröjning AV

Elektronisk volym
8 stegs (1,2, ..., 8) indikering

Signalmått In Kanalindikering
vald kanal visas

Funktioner

A: Areautgång (dektektering inom zon)
T: Inläsning
S: Manuell inställning av känslighet

