


## FEED THROUGH TERMINALS - PRK 1.5-10MM

### PRK

27008.6

Terminal Block PRK2.5/3A 2.5sq, Grey, Push In - 3 connections

- Tool free connections
- 2 to 4 connections
- 2 way cross connect channel
- Push button cable release
- Test pickoff point

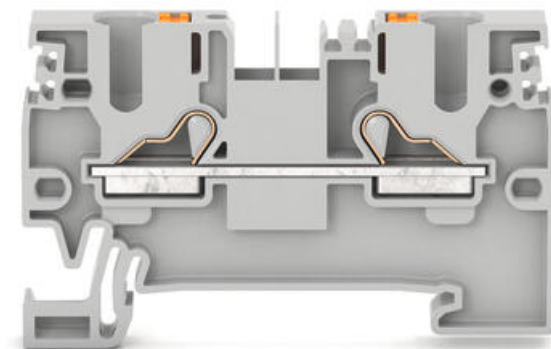

#### Product description

Opening the clamp to release the wire is done using the integrated insulated plunger that insures that actuating the clamping spring is completely safe. This gives you a noticeable time advantage during the wiring process. The extremely compact terminals ensure a high current carrying capacity, a secure fit and the highest level of stability on the rail. The new feed-through and protective earth terminals will be available in six cross-section ranges from 1.5 mm<sup>2</sup> to 16 mm<sup>2</sup> in 2, 3 and 4-wire connection variants for wire cross-sections of 0.34 mm<sup>2</sup> to 25 mm<sup>2</sup>. The addition of double and triple deck terminals is also available in this growing range.

#### Specifications

<b>Color</b>	Grey
<b>Connections</b>	3
<b>Contamination degree</b>	3
<b>Country of origin</b>	CZ
<b>Cross connect channels</b>	2
<b>Cross section single wire from</b>	0.14
<b>Cross section single wire to</b>	4
<b>Cross section stranded wire from</b>	0.14
<b>Cross section stranded wire to</b>	2.5
<b>Cross section stranded with ferrule from</b>	0.14
<b>Cross section stranded with ferrule to</b>	2.5
<b>Cross-Section</b>	2.5
<b>Flamklass</b>	UL94-V0

Height	35.2
Height TS 35/7.5	36.7
Insulation Material	Polyamide 6.6
Length	60.35
Mounting	Mounting rail TS 35/7.5
Number of levels	1
Number of terminals per level	3
Operating temperature from	-40
Operating temperature to	120
Overvoltage category	III
Pack Size	50
Plug gauge acc. EN 60 947-1	A3
Rated Current IEC	24
Rated impulse voltage	6
Rated wire cross section from	26
Rated wire cross section to	12
Rated Voltage IEC	800
Stripping Length	10
Tariff code	85369010
Weight	7.34
Width	5.1

