


EARTH TERMINALS - PSL 1.5-10MM

PSL

27019.2

Terminal Block PSL6/2A 4sq, GNYE, Push In

- Snap on
- 2 to 4 connections
- Pluggable cross connectors
- Push button cable release
- Test pick off point

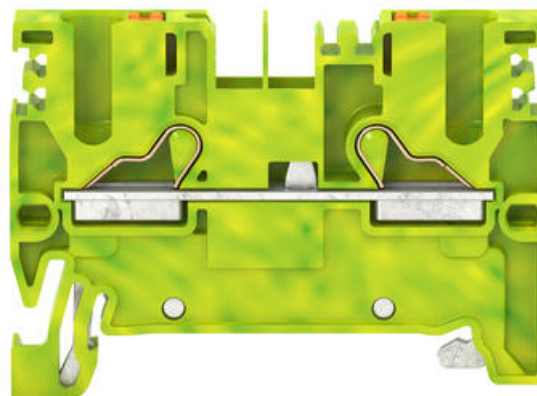

Product description

The compact and innovative connectors ensure high current carrying capacity, a pull-resistant connection and a very stable fixing to the DIN rail. The new bushing and protective earthing connectors are available in six cross-sectional areas from 1.5 mm² to 16 mm², with 2, 3 and 4-conductor connection options with conductor areas from 0.34 mm² to 25 mm². Two- and three-layer connectors are also available for this new range. PSL connectors are DIN-rail pluggable earthing connectors, available in 2, 3 and 4-pole up to a nominal wire size of 16mm².

Specifications

| | |
|---|--------------|
| Color | Green/yellow |
| Connections | 2 |
| Contamination degree | 3 |
| Country of origin | CZ |
| Cross connect channels | 1 |
| Cross section single wire from | 0.5 |
| Cross section single wire to | 10 |
| Cross section stranded wire from | 0.5 |
| Cross section stranded wire to | 6 |
| Cross section stranded with ferrule from | 0.5 |
| Cross section stranded with ferrule to | 10 |
| Cross-Section | 6 |
| Flamklass | UL94-V0 |

| | |
|-------------------------------|-------------------------|
| Height | 42 |
| Height TS 35/7.5 | 44 |
| Insulation Material | Polyamide 6.6 |
| Length | 57.7 |
| Mounting | Mounting rail TS 35/7.5 |
| Number of levels | 1 |
| Number of terminals per level | 2 |
| Operating temperature from | -40 |
| Operating temperature to | 120 |
| Overvoltage category | III |
| Pack Size | 50 |
| Plug gauge acc. EN 60 947-1 | A5 |
| Rated impulse voltage | 8 |
| Rated wire cross section from | 20 |
| Rated wire cross section to | 8 |
| Stripping Length | 12 |
| Tariff code | 85369010 |
| Weight | 18.75 |
| Width | 8.1 |

