


## FEED THROUGH TERMINALS - PRK 1.5-10MM

### PRK

27020.6

Terminal Block PRK6/3A 4sq, Grey, Push In - 3 connections

- Tool free connections
- 2 to 4 connections
- 2 way cross connect channel
- Push button cable release
- Test pickoff point

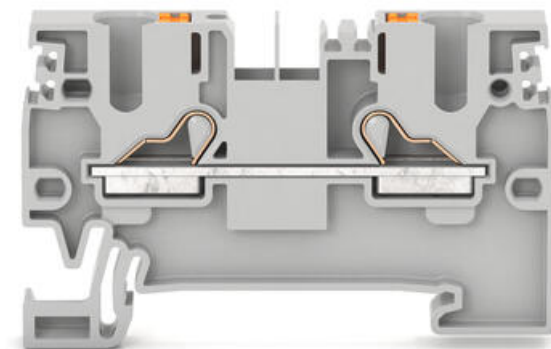

#### Product description

Opening the clamp to release the wire is done using the integrated insulated plunger that insures that actuating the clamping spring is completely safe. This gives you a noticeable time advantage during the wiring process. The extremely compact terminals ensure a high current carrying capacity, a secure fit and the highest level of stability on the rail. The new feed-through and protective earth terminals will be available in six cross-section ranges from 1.5 mm<sup>2</sup> to 16 mm<sup>2</sup> in 2, 3 and 4-wire connection variants for wire cross-sections of 0.34 mm<sup>2</sup> to 25 mm<sup>2</sup>. The addition of double and triple deck terminals is also available in this growing range.

#### Specifications

|   |         |
|---|---------|
| <b>Color</b>                                    | Grey    |
| <b>Connections</b>                              | 3       |
| <b>Contamination degree</b>                     | 3       |
| <b>Country of origin</b>                        | CZ      |
| <b>Cross connect channels</b>                   | 2       |
| <b>Cross section single wire from</b>           | 0.5     |
| <b>Cross section single wire to</b>             | 10      |
| <b>Cross section stranded wire from</b>         | 0.5     |
| <b>Cross section stranded wire to</b>           | 6       |
| <b>Cross section stranded with ferrule from</b> | 0.5     |
| <b>Cross section stranded with ferrule to</b>   | 10      |
| <b>Cross-Section</b>                            | 6       |
| <b>Flamklass</b>                                | UL94-V0 |

|                               |                         |
|-------------------------------|-------------------------|
| Height                        | 42                      |
| Height TS 35/7.5              | 44                      |
| Insulation Material           | Polyamide 6.6           |
| Length                        | 74.1                    |
| Mounting                      | Mounting rail TS 35/7.5 |
| Number of levels              | 1                       |
| Number of terminals per level | 3                       |
| Operating temperature from    | -40                     |
| Operating temperature to      | 120                     |
| Overvoltage category          | III                     |
| Pack Size                     | 50                      |
| Plug gauge acc. EN 60 947-1   | A5                      |
| Rated Current IEC             | 52                      |
| Rated impulse voltage         | 8                       |
| Rated wire cross section from | 20                      |
| Rated wire cross section to   | 8                       |
| Rated Voltage IEC             | 1000                    |
| Stripping Length              | 12                      |
| Tariff code                   | 85369010                |
| Weight                        | 17.64                   |
| Width                         | 8.1                     |

