


FEED THROUGH TERMINALS - PRK 1.5-10MM

PRK

27024.6

Terminal Block PRK10/2A 10sq, Grey, Push In

- Tool free connections
- 2 to 4 connections
- 2 way cross connect channel
- Push button cable release
- Test pickoff point

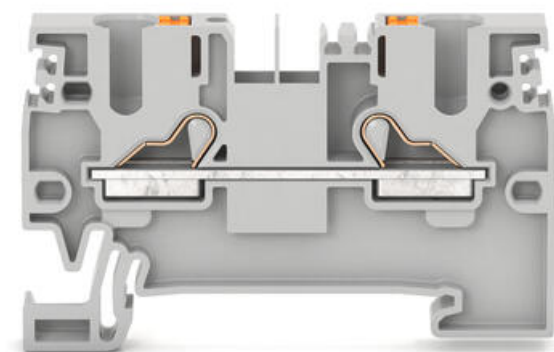

Product description

Opening the clamp to release the wire is done using the integrated insulated plunger that insures that actuating the clamping spring is completely safe. This gives you a noticeable time advantage during the wiring process. The extremely compact terminals ensure a high current carrying capacity, a secure fit and the highest level of stability on the rail. The new feed-through and protective earth terminals will be available in six cross-section ranges from 1.5 mm² to 16 mm² in 2, 3 and 4-wire connection variants for wire cross-sections of 0.34 mm² to 25 mm². The addition of double and triple deck terminals is also available in this growing range.

Specifications

Color	Grey
Connections	2
Contamination degree	3
Country of origin	DE
Cross connect channels	2
Cross section single wire from	0.5
Cross section single wire to	16
Cross section stranded wire from	0.5
Cross section stranded wire to	10
Cross section stranded with ferrule from	0.5
Cross section stranded with ferrule to	10
Cross-Section	10
Flamklass	UL94-V0

Height	48
Height TS 35/7.5	49.5
Insulation Material	Polyamide 6.6
Length	67.8
Mounting	Mounting rail TS 35/7.5
Number of levels	1
Number of terminals per level	2
Operating temperature from	-40
Operating temperature to	120
Overvoltage category	III
Pack Size	50
Plug gauge acc. EN 60 947-1	A6
Rated Current IEC	70
Rated impulse voltage	8
Rated wire cross section from	20
Rated wire cross section to	6
Rated Voltage IEC	1000
Stripping Length	18
Tariff code	85369010
Weight	20.5
Width	10.1

