


EARTH TERMINALS - PSL 1.5-10MM

PSL

27025.2

Terminal Block PSL10/2A 10sq, GNYE, Push In

- Snap on
- 2 to 4 connections
- Pluggable cross connectors
- Push button cable release
- Test pick off point

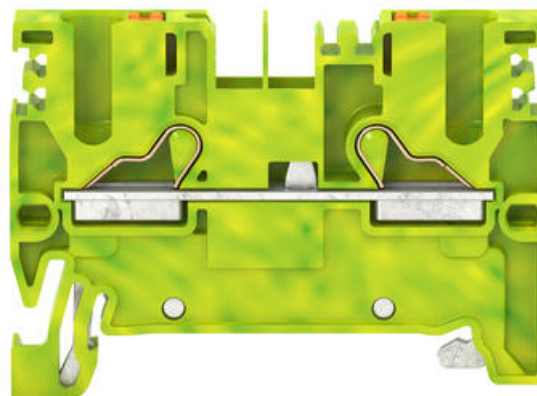

Product description

The compact and innovative connectors ensure high current carrying capacity, a pull-resistant connection and a very stable fixing to the DIN rail. The new bushing and protective earthing connectors are available in six cross-sectional areas from 1.5 mm² to 16 mm², with 2, 3 and 4-conductor connection options with conductor areas from 0.34 mm² to 25 mm². Two- and three-layer connectors are also available for this new range. PSL connectors are DIN-rail pluggable earthing connectors, available in 2, 3 and 4-pole up to a nominal wire size of 16mm².

Specifications

Color	Green/yellow
Connections	2
Contamination degree	3
Country of origin	DE
Cross connect channels	1
Cross section single wire from	0.5
Cross section single wire to	16
Cross section stranded wire from	0.5
Cross section stranded wire to	10
Cross section stranded with ferrule from	0.5
Cross section stranded with ferrule to	10
Cross-Section	10
Flamklass	UL94-V0

Height	48
Height TS 35/7.5	49.5
Insulation Material	Polyamide 6.6
Length	67.8
Mounting	Mounting rail TS 35/7.5
Number of levels	1
Number of terminals per level	2
Operating temperature from	-40
Operating temperature to	120
Overvoltage category	III
Pack Size	50
Plug gauge acc. EN 60 947-1	A6
Rated impulse voltage	8
Rated wire cross section from	20
Rated wire cross section to	6
Stripping Length	18
Tariff code	85369010
Weight	1
Width	10.1

