


FEED THROUGH TERMINALS - ZRK 2.5-16 MM²

ZRK

3500.0

ZRK 2.5/2A Brown, 2.5mm² Tension spring, feed through

- Material polyamide 6.6
- Temperature resistance -40 °C...+120 °C
- Flammability class V0

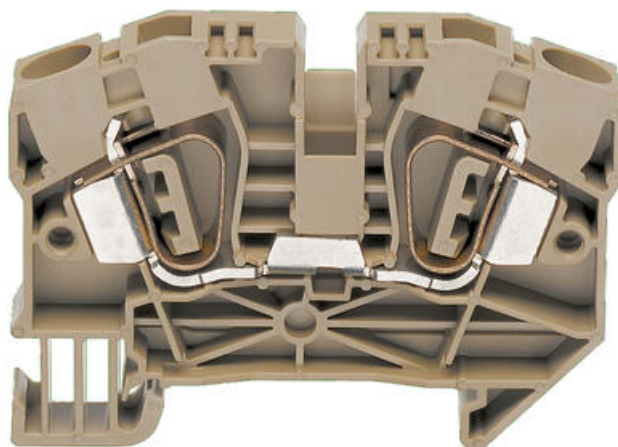

Product description

Specifications

Approvals	UL, CSA, GL, CSA US, KEMA KUR, EAC
Color	Brown
Connections	2
Contamination degree	3
Country of origin	BG
Cross connect channels	2
Cross section single wire from	0.5
Cross section single wire to	4
Cross section stranded wire from	0.5
Cross section stranded wire to	4

Cross section stranded with ferrule from	0.5
Cross section stranded with ferrule to	2.5
Cross-Section	2.5
CSA test standard	C22.2 No 158
CSAus test standard	UL 1059
EAC test standard	TR ZU 004/2011
Flamklass	UL94-V0
GL test standard	IEC 60947-7-1:2009
Height TS 35/7.5	39
Insulation Material	Polyamide 6.6
KEMA KEUR test standard	EN 60947-7-1:2009
Length	59
Mounting	TS 35
Number of levels	1
Number of test pick off options	2
Operating temperature from	-40
Operating temperature to	120
Overvoltage category	III
Pack Size	100
Plug gauge acc. EN 60 947-1	A3
Rated Current CSA	27
Rated current CSAus	27
Rated Current IEC	24
Rated Current To UL	27
Rated impulse voltage	8
Rated wire cross section from (AWG)	20
Rated wire cross section to (AWG)	12
Rated voltage CSAus	600
Rated Voltage IEC	800
Rated Voltage To UL	600
Stripping Length	10
Tariff code	85369010
UL test standard	UL 1059
Weight	7.6

Width	5.1
Voltage CSA	600

