


CROSS CONNECTORS FOR RK, IK, DLI & SK RANGE

Q, QI

2567.0

Terminal Link Bar Q2 RK2.5/RKD2.5sq, 2 Way

- Screw in
- Insulated versions
- Can be cut down

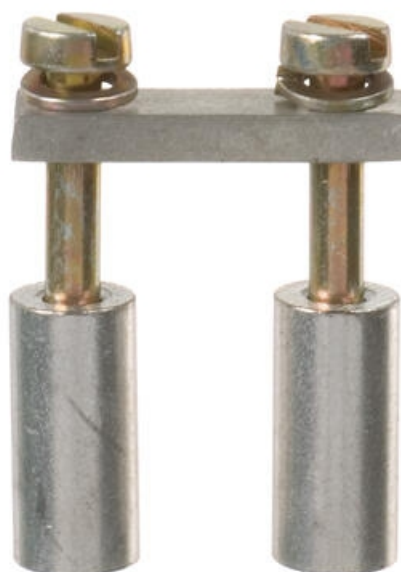

Product description

The Q/QI screwable cross-connector system allows you to quickly link terminal blocks of the same size. The QI range is touch-safe and are generally available in 2, 3, 4 or 10 poles, some variants have up to 98 poles, which can be cut down as required. With both ranges it is possible to 'skip' over terminals by breaking out the conductor (QI) or removing the screw and sleeve (Q).

Specifications

Additional information	for RK 2,5 KBL 2,5 RKD 2,5 KBLD 2,5
Contamination degree	3
Country of origin	DE
Cross-Section	2.5
Diameter Of Hole	2.8
Distance to hole centres	5.1
Length	4
Material	Copper
Max voltage with partition	800
Max voltage without partition	400
Mounting	Screw in
Number of poles	2
Pack Size	50
Pitch	5

Rated Current IEC	20
Screw size	M 2,5
Screw type	Slotted
Tariff code	85369010
Torque max	0.8
Torque Min	0.4
Weight	2.2
Width	9.1