


EARTH TERMINALS - ZSL 2.5-16MM²

ZSL, ZSLD

3510.2

ZSL 2,5/2A GNYE

- Material polyamide 6.6
- Temperature resistance -40 °C...+120 °C
- Flammability class V0

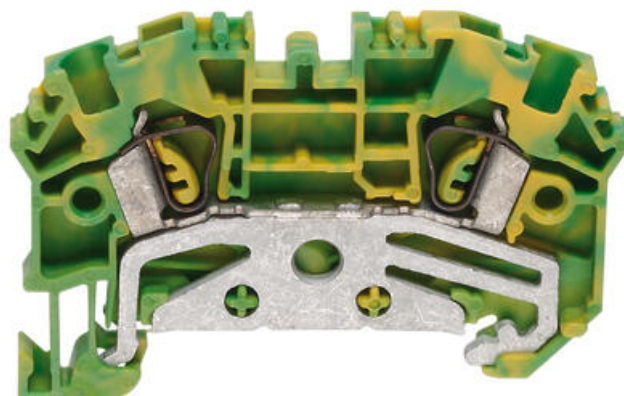

Product description

Specifications

Approvals	UL, CSA, GL, CSA US, cUL, KEMA KUR, EAC
Color	Green/yellow
Connections	2
Contamination degree	3
Country of origin	BG
Cross connect channels	0
Cross section single wire from	0.5
Cross section single wire to	4
Cross section stranded wire from	0.5
Cross section stranded wire to	4
Cross section stranded with ferrule from	0.5
Cross section stranded with ferrule to	2.5
Cross-Section	2.5
CSA test standard	C22.2 No 158
CSAus test standard	UL 1059
cUL test standard	C22.2 No 158
EAC test standard	TR ZU 004/2011
Flamklass	UL94-V0
GL test standard	IEC 60947-7-2:2009
Height TS 35/7.5	39

Insulation Material	Polyamide 6.6
KEMA KEUR test standard	EN 60947-7-2:2009
Length	59
Mounting	TS 35
Number of levels	1
Number of test pick off options	2
Operating temperature from	-40
Operating temperature to	120
Overvoltage category	III
Pack Size	100
Plug gauge acc. EN 60 947-1	A3
Rated wire cross section from (AWG)	20
Rated wire cross section to (AWG)	12
Stripping Length	10
Tariff code	85369010
UL test standard	UL 1059
Weight	12
Width	5.1

