
TENSION SPRING DIRECT MOUNT TERMINALS

ZSRK-RC, ZSRK-D, ZSRK-D/F

3587.2
ZSRK 2.5/2A-RC Beige, 2.5mm² Compact tension spring, feed through, Direct 'Snap in' mount

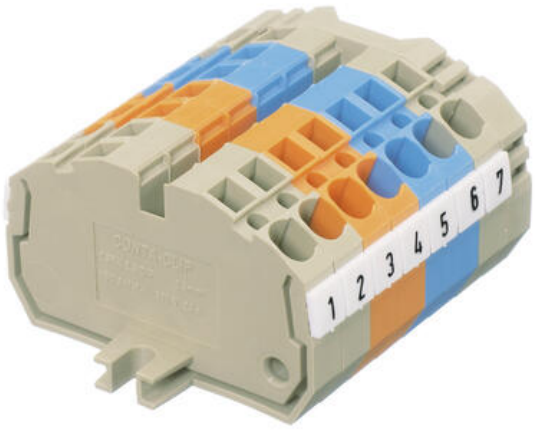

- Compact
- Screw flange or snap in direct mount
- Temperature resistance -40 ºC...+120 ºC
- Flammability class V0
- Material polyamide 6.6

PRODUCT DESCRIPTION

The ZSRK 2.5/2A/D/F and ZSRK 2.5/2A/RC are direct-mount tension-spring terminals with built in cross-connection channel. They are a compact and modular design that can be used with cables from 0.08 – 2.5 mm² and are rated 800 V.
The range is modular, so you simple snap together the number of poles you need, the block can then be directly screwed on to the mounting plate with the ZSRK 2.5/2A/D/F or directly snapped on with the ZSRK 2.5/2A/RC.

SPECIFICATIONS

Cross-Section	2.5
Color	Beige
Rated Voltage IEC	800
Rated Current IEC	24
Rated impulse voltage	8
Overvoltage category	III
Contamination degree	3
Approvals	UL, CSA, GL, CSA US, cUL, KEMA KUR, EAC
Additional information	with housing pegs and clip

Length	40
Width	5.1
Height	24

Connections	2
Number of levels	1
Plug gauge acc. EN 60 947-1	A3
Cross connect channels	1

Number of test pick off options	2
Cross section single wire from	0.5
Cross section single wire to	4
Cross section stranded wire from	0.5
Cross section stranded wire to	4
Cross section stranded with ferrule from	0.5
Cross section stranded with ferrule to	2.5
Rated wire cross section from (AWG)	20
Rated wire cross section to (AWG)	12
Stripping Length	10

Flamklass	UL94-V0
Operating temperature from	-40
Operating temperature to	120

Rated Voltage To UL	300
Rated Current To UL	20
UL test standard	UL 1059
Voltage CSA	300
Rated Current CSA	20
CSA test standard	C22.2 No 158
Rated voltage CSAus	300
Rated current CSAus	20
CSAus test standard	UL 1059
Rated voltage cUL	300
Rated current cUL	20
cUL test standard	C22.2 No 158
GL test standard	IEC 60947-7-1:2009
EAC test standard	TR ZU 004/2011
KEMA KEUR test standard	EN 60947-7-1:2009

Tariff code	85369010
Country of origin	DE
Weight	5
Pack Size	100