
DIRECT MOUNT SCREW TERMINALS

BKA, RD-D

1320.2
BKA 2.5/1 Beige, 2.5mm² Direct mountable compact

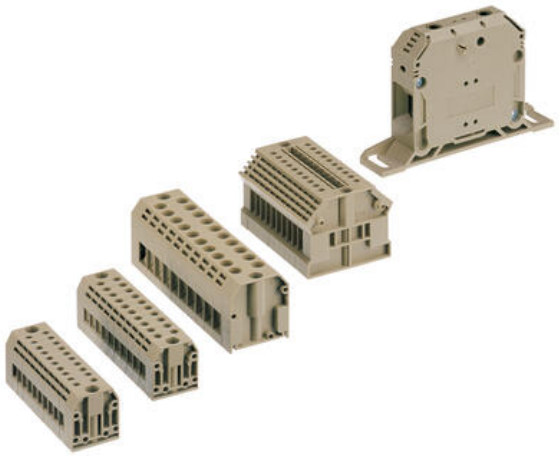

- Compact 2.5mm -10mm² versions snap together
- Pre-labeled versions
- RK-D 50mm -240mm² Direct mount
- External cross connectors

PRODUCT DESCRIPTION

SPECIFICATIONS

Cross-Section	2.5
Color	Beige
Rated Voltage IEC	400
Rated Current IEC	24
Rated impulse voltage	6
Overvoltage category	III
Contamination degree	3
Approvals	UL, cUL, KEMA KUR, EAC

Length	22
Width	5
Height	23

Connections	2
Number of levels	1
Plug gauge acc. EN 60 947-1	A3
Cross section single wire from	0.2
Cross section single wire to	4
Cross section stranded wire from	0.2
Cross section stranded wire to	4

Cross section stranded with ferrule from	0.2
Cross section stranded with ferrule to	2.5
Rated wire cross section from (AWG)	22
Rated wire cross section to (AWG)	12
Stripping Length	7
Screw size	M 2,5
Torque Min	0.4
Torque max	0.8

Flamklass	UL94-V2
Operating temperature from	-40
Operating temperature to	105

Rated Voltage To UL	300
Rated Current To UL	20
UL test standard	UL 1059
Rated voltage cUL	300
Rated current cUL	20
cUL test standard	C22.2 No 158
EAC test standard	TR ZU 004/2011
KEMA KEUR test standard	EN 60947-7-1:2009

Tariff code	85369010
Country of origin	DE
Weight	3.4
Pack Size	100

