


DIRECT MOUNT SCREW TERMINALS

BKA, RD-D

1320.2

BKA 2.5/1 Beige, 2.5mm² Direct mountable compact

- Compact 2.5mm -10mm² versions snap together
- Pre-labeled versions
- RK-D 50mm -240mm² Direct mount
- External cross connectors

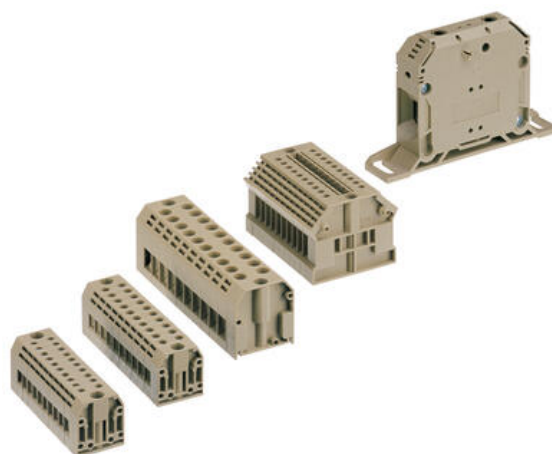

PRODUCT DESCRIPTION

SPECIFICATIONS

Approvals	UL, cUL, KEMA KUR, EAC
Color	Beige
Connections	2
Contamination degree	3
Country of origin	DE
Cross section single wire from	0.2
Cross section single wire to	4
Cross section stranded wire from	0.2
Cross section stranded wire to	4
Cross section stranded with ferrule from	0.2
Cross section stranded with ferrule to	2.5
Cross-Section	2.5
cUL test standard	C22.2 No 158
EAC test standard	TR ZU 004/2011
Flamklass	UL94-V2
Height	23
KEMA KEUR test standard	EN 60947-7-1:2009
Length	22
Number of levels	1

Operating temperature from	-40
Operating temperature to	105
Overvoltage category	III
Pack Size	100
Plug gauge acc. EN 60 947-1	A3
Rated current cUL	20
Rated Current IEC	24
Rated Current To UL	20
Rated impulse voltage	6
Rated voltage cUL	300
Rated Voltage IEC	400
Rated Voltage To UL	300
Rated wire cross section from (AWG)	22
Rated wire cross section to (AWG)	12
Screw size	M 2,5
Stripping Length	7
Tariff code	85369010
Torque max	0.8
Torque Min	0.4
UL test standard	UL 1059
Weight	3.4
Width	5

