

## ELECTRONIC HYGROSTAT - EFR 012

EFR

01246.0-00

Thermostat 240v 65% ph

- Adjustable and pre-set relative humidity
- Status indicator (LED)
- High switching capacity
- Clip fixing
- Temperature-compensated




### Product description


The electronic hygrostat senses the relative humidity in an enclosure with electric/electronic components and turns on a heater at the set point, helping prevent the formation of condensation in the enclosure. The LED integrated in the adjustment knob is lit when the connected heater is in operation.

### Specifications

<b>Approvals</b>	CE, cULus, EAC, RoHS, UL, UL E164102, VDE
<b>Breaking capacity</b>	AC 240 V / AC 120 V 8 (1,6) A
<b>Color</b>	Light grey
<b>Connection</b>	5-pole terminal
<b>Contact type</b>	Changeover (SPDT)
<b>Control range humidity from</b>	65
<b>Control range humidity to</b>	65
<b>Depth</b>	38
<b>Flamklass</b>	UL94-V0
<b>Frequenze</b>	50/60 Hz
<b>Height</b>	64.5
<b>Humidity Storage</b>	<90% RH
<b>Hysteresis Humidity</b>	5% RH @ 25°C @ 50% RH
<b>Inrush Max</b>	16


IP Class	IP20
Life span	> 50,000 cycles
Material of body	Plastic
Mounting	Clip on, DIN rail
Operating Humidity	< 90% RH
Operational Temperature	0 °C ... +60°C
Storage temperature	-20°C ... +70°C
Weight	0.07
Width	42
Voltage max	230 V ac
Voltage min	230 V ac

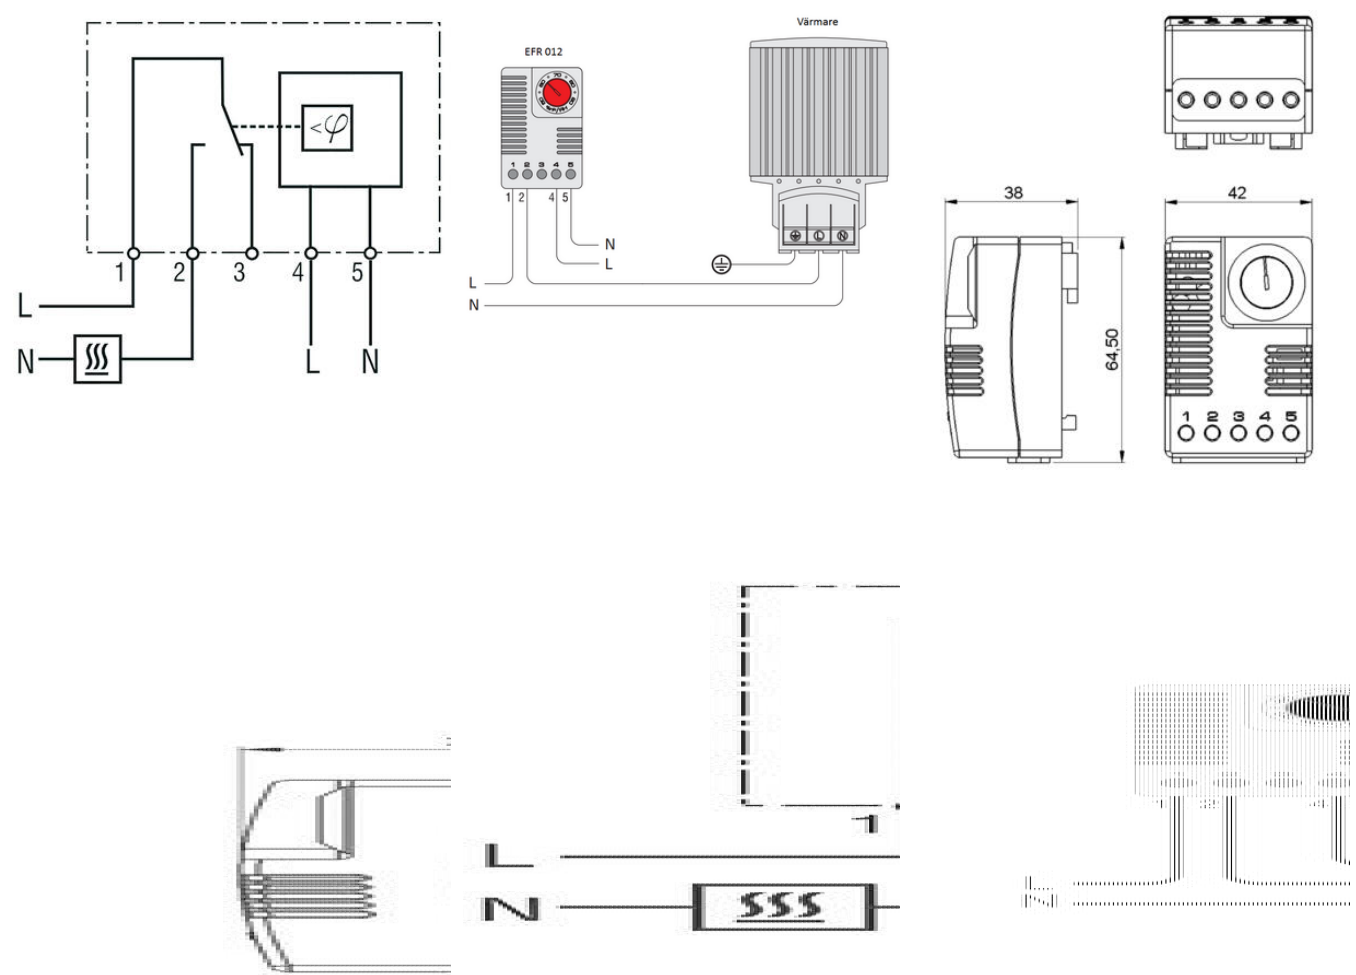




Z

—



—



—

Z

