ANDERSON NEGELE - PRESSURE GAUGE, 3A

EL

EL




- Manual pressure measurement with local display without power supply
- Direct connection to Tri-Clamp, SMS, DIN 11851 and VARIVENT
- CIP / SIP cleaning up to 140 ° C / max 60 minutes
- Materials are FDA-approved
- IP 66 display case for optimal cleaning

PRODUCT DESCRIPTION

We market high quality printing and design from our supplier Anderson-Negele, which meets the highest standards of process engineering, and is the perfect solution for applications for food, pharmaceuticals, breweries, cosmetics and pharmaceutical processes.

The products of Anderson-Negele are manufactured according to the concept of "Hygienic City Design", which is reflected in the special process adapters: CLEANadapt PHARMadapt and FLEXadapt as well as the unique design of the instruments.

Please refer to the image below for ordering information.

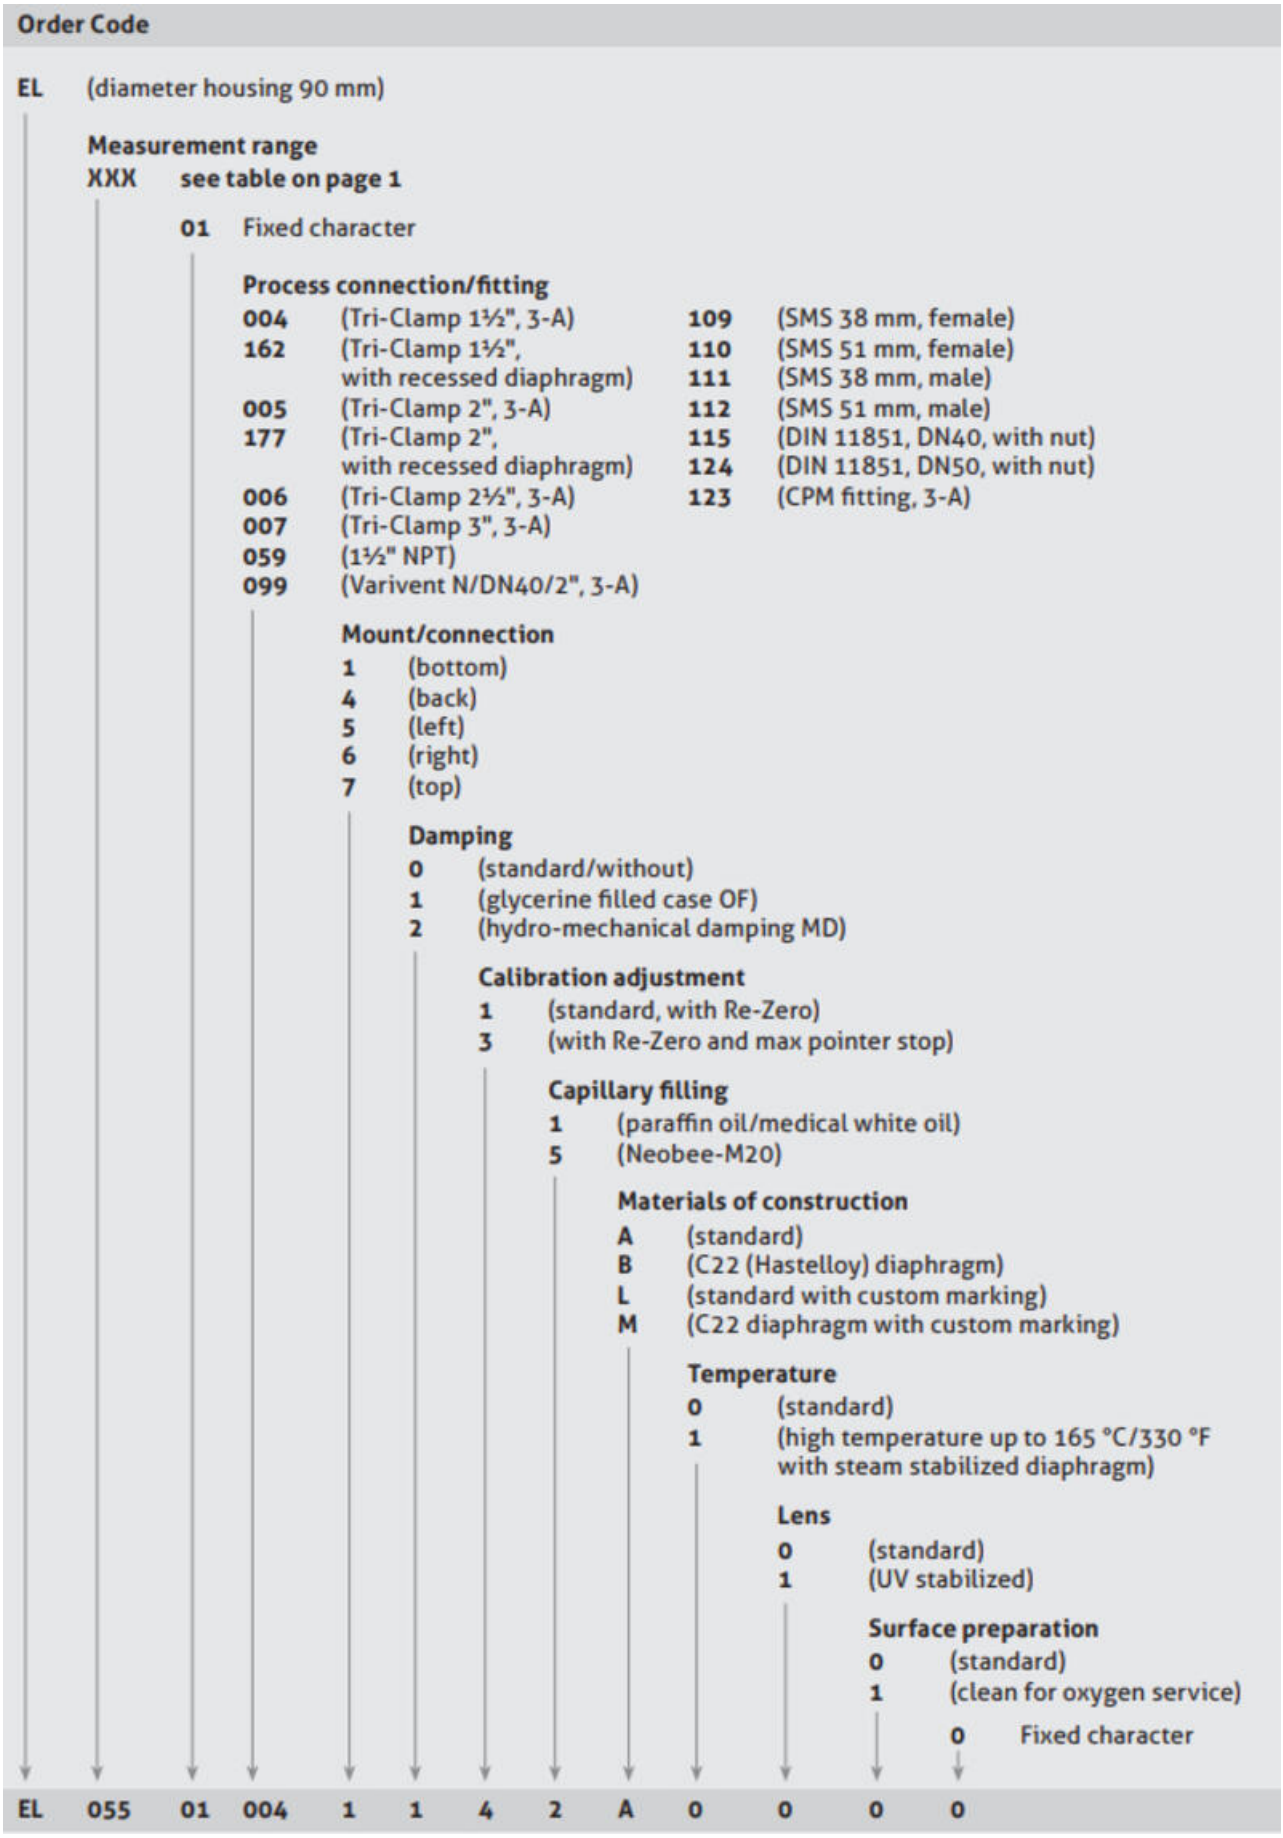

;

SPECIFICATIONS

Approvals	3-A, FDA
IP Class	IP66

Surface Finish	0.8
Temperature ambient from	4
Temperature ambient to	49
Temperature range of media from	-29
Temperature range of media to	149