

ANDERSON NEGELE - ULTRASONIC FLOW SWITCH/SENSOR - FWS/A-141

FWS-141 / FWA-141

FWS-141

- Ultrasonic Doppler Principle
- Measuring range 0.1...2.5 m/s
- Operating Pressure Max 10 Bar
- Approvals: FDA; EHEDG; 3-A



Product description


The Anderson-Negele FWS/FWA is a flow switch with an optional 4-20mA or frequency output (changeable on the sensor) to enable it to give not only a PNP switch point output but also a volumetric output when required (+/- 10% full scale accuracy on output). Using the ultrasonic Doppler principle for flow detection means that the FWS and FWA are completely independent of system temperature fluctuation, media conductivity and system pressure. There is also an LED to indicate the state of the switched output, which is freely scalable across the flow range of the sensor.

This product is ideal for dry pump running detection due to its fast reaction time, use in CIP/SIP systems with a high temperature version available as well, if required. The sensor is designed to operate at 140°C for 120 minutes continuously without issue and all media contacting materials are FDA compatible. An ideal lower cost FDA approved sensor where using a more expensive technology isn't necessary and switching or "rough" flow volumes are all that is required.

Application Examples:

- Monitoring of flowing liquids in pipes
- Rough measurement of flow rates and flow volume
- Suitable for media with turbidity ≥ 1 NTU and particle size $> 50 \mu\text{m}$ e.g. drinking water, juice (unfiltered), milk, emulsions, CIP-media
- Flow monitoring in pipes from DN 25, e.g. for dry-run protection or monitoring of filters or valves
- Because of its very short reaction time and independence from temperature fluctuations and conductivity, the device is ideally suited for monitoring flow rates in CIP processes

Please refer to the image below for ordering information.

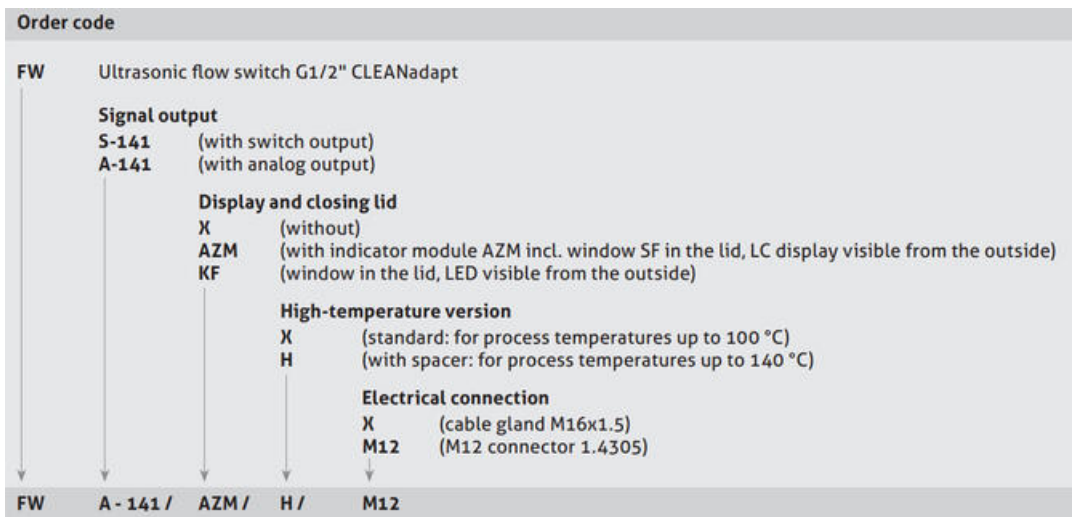

;

Specifications

| | |
|---------------------------------|----------------------------|
| Approvals | 3-A, FDA |
| Area of application | Food |
| Flow area max | 2.5 |
| Flow area min | 0.1 |
| IP Class | IP67, IP69K |
| Material of sensor housing | Stainless steel 1.4305 |
| Materials Wetted Parts | PEEK, Stainless steel 316L |
| Pressure Range Max | 10 |
| Surface Finish | 0.8 |
| Temperature ambient from | -20 |
| Temperature ambient to | 60 |
| Temperature range of media from | 0 |
| Temperature range of media to | 100 |
| Weight | 485 |