




# ASCO - 356 SERIES DIRECT OPERATED

## 3/2 Valve Block

SCG356A820V  
3 valve manifold, N/C, 3/2, 1/8", 230VAC

- Normally closed/open or universal
- Save space and installation time
- Working pressure 0 bar to 10 bar
- Block in brass or stainless

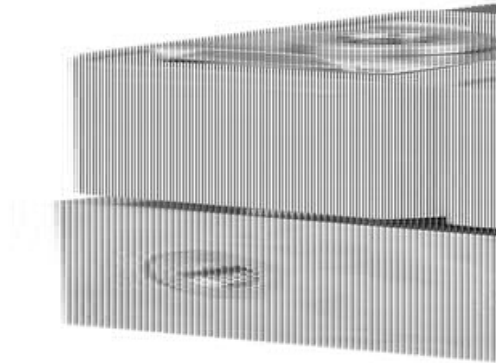

### Product description

### Specifications

Approvals	CSA, UL
Connection Port 1-2	G1/8
Connection Port 3	M5
Differential Pressure Air Max	10
Differential Pressure Min	0
Differential Pressure Oil Max	10
Differential Pressure Water Max	10
Flow Factor / Flow Coefficient	0,08
Flow Max l/min Double	1.33
Function	3/2, Normally Closed (SPST)
IP Class	IP65
Material Body	Brass
Material of seals	FPM
Material Plunger	Stainless steel
Material Short Call	Copper
Materials Seat	Brass

