




# ASCO - 356 SERIES DIRECT OPERATED

## 3/2 Valve Block

SCG356A855V  
2 valve manifold, N/C, 3/2, 1/8", 230VAC

- Normally closed/open or universal
- Save space and installation time
- Working pressure 0 bar to 10 bar
- Block in brass or stainless

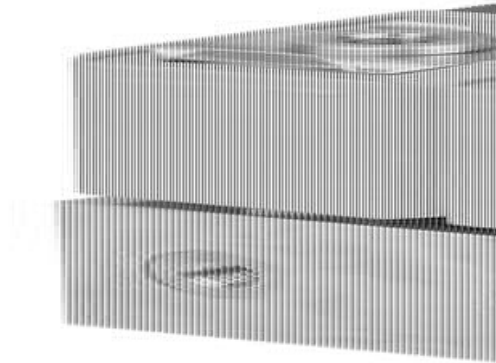

### Product description

### Specifications

Approvals	CSA, UL
Connection Port 1-2	G1/8
Connection Port 3	M5
Differential Pressure Air Max	4
Differential Pressure Min	0
Differential Pressure Oil Max	4
Differential Pressure Water Max	4
Flow Factor / Flow Coefficient	0,13
Flow Max l/min Double	2.16
Function	3/2, Normally Closed (SPST)
IP Class	IP65
Material Body	Brass
Material of seals	FPM
Material Plunger	Stainless steel
Material Short Call	Copper
Materials Seat	Brass

<b>Materials Seat Seal</b>	FPM
<b>Materials Spring</b>	Stainless steel
<b>No. Valves</b>	2
<b>Power Consumption</b>	4
<b>Response Closing</b>	5
<b>Response From Stroke</b>	10
<b>Temperature range from</b>	-10
<b>Temperature range of media from</b>	-10
<b>Temperature range of media to</b>	100
<b>Temperature range to</b>	60
<b>Throughput</b>	2.4
<b>Weight</b>	0.321
<b>Viscosity Max</b>	40
<b>Voltage AC max</b>	230

