


## ASCO - 356 SERIES DIRECT OPERATED

### 3/2 Valve Block

SCG356A858V

5 valve manifold, N/C, 3/2, 1/8", 230VAC

- Normally closed/open or universal
- Save space and installation time
- Working pressure 0 bar to 10 bar
- Block in brass or stainless

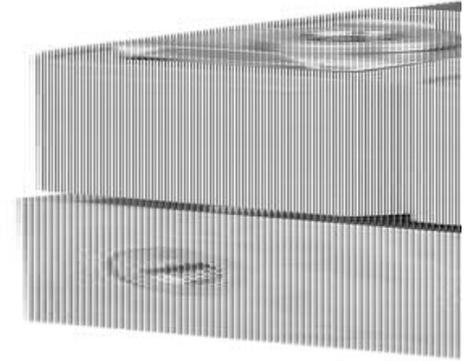

#### Product description

#### Specifications

<b>Approvals</b>	CSA, UL
<b>Connection Port 1-2</b>	G1/8
<b>Connection Port 3</b>	M5
<b>Differential Pressure Air Max</b>	4
<b>Differential Pressure Min</b>	0
<b>Differential Pressure Oil Max</b>	4
<b>Differential Pressure Water Max</b>	4
<b>Flow Factor / Flow Coefficient</b>	0,13
<b>Flow Max l/min Double</b>	2.16
<b>Function</b>	3/2, Normally Closed
<b>IP Class</b>	IP65
<b>Material Body</b>	Brass
<b>Material of seals</b>	FPM
<b>Material Plunger</b>	Stainless steel
<b>Material Short Call</b>	Copper
<b>Materials Seat</b>	Brass

<b>Materials Seat Seal</b>	FPM
<b>Materials Spring</b>	Stainless steel
<b>No. Valves</b>	5
<b>Power Consumption</b>	4
<b>Response Closing</b>	5
<b>Response From Stroke</b>	10
<b>Temperature range from</b>	-10
<b>Temperature range of media from</b>	-10
<b>Temperature range of media to</b>	100
<b>Temperature range to</b>	60
<b>Throughput</b>	2.4
<b>Weight</b>	0.636
<b>Viscosity Max</b>	40
<b>Voltage AC max</b>	230

