




ASCO - 356 SERIES DIRECT OPERATED

3/2 Valve Block

SCG356A861V
8 valve manifold, N/C, 3/2, 1/8", 230VAC

- Normally closed/open or universal
- Save space and installation time
- Working pressure 0 bar to 10 bar
- Block in brass or stainless

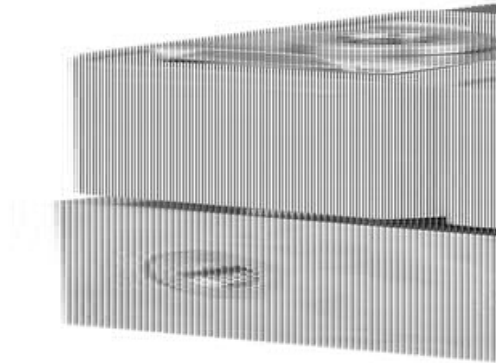

Product description

Specifications

Approvals	CSA, UL
Connection Port 1-2	G1/8
Connection Port 3	M5
Differential Pressure Air Max	4
Differential Pressure Min	0
Differential Pressure Oil Max	4
Differential Pressure Water Max	4
Flow Factor / Flow Coefficient	0,13
Flow Max l/min Double	2.16
Function	3/2, Normally Closed (SPST)
IP Class	IP65
Material Body	Brass
Material of seals	FPM
Material Plunger	Stainless steel
Material Short Call	Copper
Materials Seat	Brass

Materials Seat Seal	FPM
Materials Spring	Stainless steel
No. Valves	8
Power Consumption	4
Response Closing	5
Response From Stroke	10
Temperature range from	-10
Temperature range of media from	-10
Temperature range of media to	100
Temperature range to	60
Throughput	2.4
Weight	0.951
Viscosity Max	40
Voltage AC max	230

