



ASCO - 3/2 SEAT VALVE AIR CONTROLLED 1/2"-2"

E398A003
Angle seat valve 1" 3/2 Universal

- Universal
- Working pressure 0 to 40 bar
- For temperatures up to +250 °C
- For viscosity up to 5,000 cSt



Product description

Specifications

Approvals	SIL2
Connection Air	1/8 BSP
Connection Thread	G1
Differential Pressure Air Max	40
Differential Pressure Max	40
Differential Pressure Min	0
Differential Pressure Oil Max	40
Differential Pressure Water Max	40
Differential steam pressure max	40
Function 1	3/2
Function 2	Universal
Material Body	Stainless steel 316L
Material of seals	Graphite
Material Operator	Nickel plated aluminum
Material Rod	Stainless steel
Materials Gland	PTFE flask filled

Materials Piston Seal

Bronze, PTFE

Max. pressure

40

Packing Materials

Stainless steel

Pilot Pressure Max

10

Temperature range from

-25

Temperature range of media from

-10

Temperature range of media to

250

Temperature range to

180

Throughput

25

Type of valve


Seat valve

Weight


4.24

Viscosity Max

5000

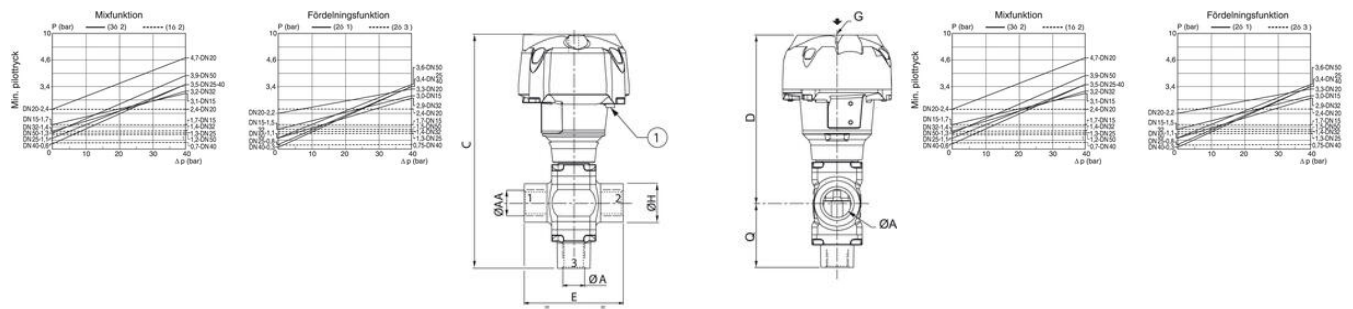

Ventil (ØAA)	ØA	ØB	C	D	E	G	ØH	ØP	Q
1/2"	15	110	203,1	151,6	85	1/8	33	95	51,5
3/4"	20	132,5	229,2	170,9	110	1/8	40	117	58,3
1"	25	132,5	244,9	180,9	120	1/8	46	117	64
1 1/4"	32	191	318,2	237,2	145	1/4	57	172,5	81
1 1/2"	40	191	361,7	259,2	150	1/4	65	172,5	102,5
2"	50	247	436	328,5	190	1/4	75	230	107,5

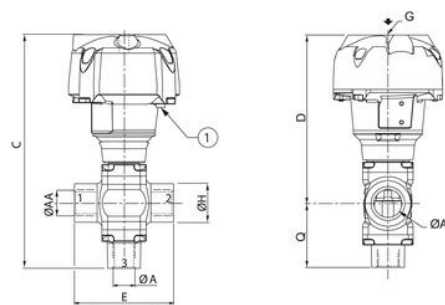

Ventil (ØAA)	ØA	ØB	C	D	E	G	ØH	ØP	Q
1/2"	15	110	203,1	151,6	85	1/8	33	95	51,5
3/4"	20	132,5	229,2	170,9	110	1/8	40	117	58,3
1"	25	132,5	244,9	180,9	120	1/8	46	117	64
1 1/4"	32	191	318,2	237,2	145	1/4	57	172,5	81
1 1/2"	40	191	361,7	259,2	150	1/4	65	172,5	102,5
2"	50	247	436	328,5	190	1/4	75	230	107,5