

ASCO - 2/2 PULSE VALVE 3/4"-1 1/2"

SCS353A821

Solenoid valve 2/2 NC 1 230/50

- Currentless closed
- Thread or quick coupling
- Electric/Air controlled
- Housing in aluminium




Product description

Specifications

Coil Material	Epoxy
Connection Thread	G1
Differential Pressure Air Max	8.5
Differential Pressure Max	8.5
Differential Pressure Min	0.3
Flow Factor / Flow Coefficient	23
Flow Max l/min Double	383
Function 1	2/2
Function 2	Normally Closed (SPST)
IP Class	IP65
Material Body	Aluminium
Material Bolt	POM
Material of seals	NBR
Material Plunger	Stainless steel
Material Short Call	Copper
Materials Spring	Stainless steel

Max. pressure	10
Power Consumption	6.3
Temperature range from	-20
Temperature range of media from	-20
Temperature range of media to	85
Temperature range to	85
Throughput	25
Weight	0.63
Voltage AC	230

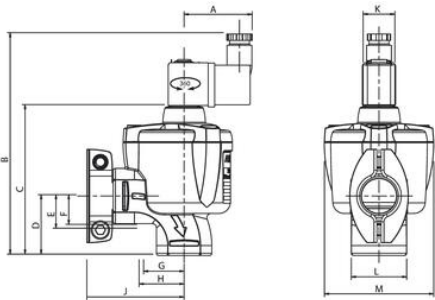

Ventil	A	B	C	D	E	F	G	H
SCS353A811	48	156	106	42	24	21	29	32
SCS353A821	48	162	112	51	32	26	37	43
SCS353A831	48	191	141	60	97	22	62	112