




# ASCO - AIR CONTROLLED 1/4" OR NAMUR

G551A102  
Valve NAMUR. Air-air (bistable)

- Function 3/2-5/2
- Environmental protection version
- High flow rate
- Robust construction with aluminium housing

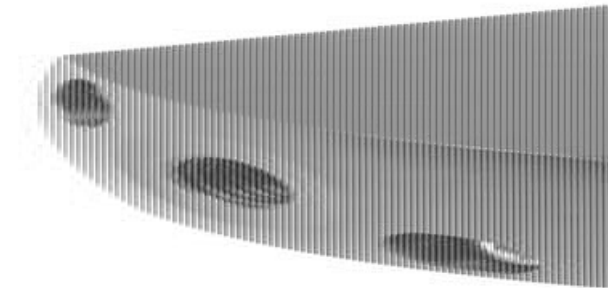

### Product description

Air controlled slide valve for 1/4" connection or NAMUR. The 1/4" valve can be ordered in an environmental protection version, whereas it is standard with the NAMUR valve. Environmental protection means that all the internal parts of the valve are totally sealed against fluids, dust, corrosive substances etc. that may be present in the surroundings.

The 1/4" valve is ordered in 3/2 or 5/2 versions and can be single or manifold mounted for common supply. The NAMUR valve is delivered with two adapter plates as standard. The valve can then be adapted to 3/2 or 5/2 function by fitting the relevant plate.

### Specifications

Approvals	IEC, TÜV
Connection Air	G1/8
Connection Thread	G1/4
Differential Pressure Max	10
Differential Pressure Min	0
Flow Max l/min Double	700
Function	3/2-5/2, air operated, NAMUR
IP Class	IP65
Manual operation	No
Material of body	Anodised aluminum
Material of seals	NBR, PUR
Materials Internal Parts	Aluminium, POM, Stainless steel
Max. pressure	10
Mounting	NAMUR standard
Pilot Pressure Max	10

<b>Pilot Pressure Min</b>	2
<b>Short Circuit Protection</b>	No
<b>Temperature range from</b>	-25
<b>Temperature range to</b>	60
<b>Type of valve</b>	Air controlled
<b>Weight</b>	0.43

