

ASCO - 2/2 PULSE VALVE 3/4"-3"

SCG353051

Solenoid pulse valve 2/2 NC 2.1/2" 230/50 thread

- Currentless closed
- Thread or quick coupling
- Electric/air controlled
- Housing in aluminium




Product description

Specifications

Coil Material	Epoxy
Connection Thread	2 1/2 BSP
Differential Pressure Air Max	8.5
Differential Pressure Min	0.35
Flow Factor / Flow Coefficient	92
Flow Max l/min Double	1540
Function 1	2/2
Function 2	Normally Closed (SPST)
IP Class	IP65
Material Body	Aluminium
Material of seals	NBR
Material Plunger	Stainless steel
Material Short Call	Copper
Materials Spring	Stainless steel
Max. pressure	10
Membrane Material	Neoprene

Power Consumption	10.5
Temperature range from	-20
Temperature range of media from	-20
Temperature range of media to	85
Temperature range to	85
Throughput	66
Weight	2.6
Voltage AC	230

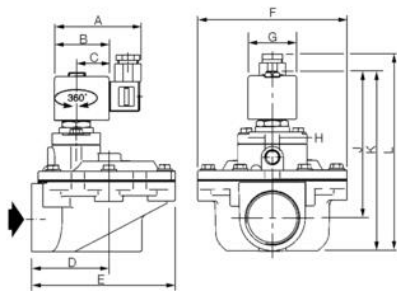

Ventil	A	B	C	D	E	F	G	H	J	K	L
SCG353043	75	45	27	51	89	75	39	-	92	113	130
SCG353044	75	45	27	51	89	75	39	-	92	113	130
SCG353047	80	50	30	71	130	136	45	3/8	131	161	178
SCG353050	80	50	30	95	168	165	45	3/4	165	210	227
SCG353051	80	50	30	95	168	165	45	3/4	165	210	227