

ASCO - 2/2 PULSE VALVE 3/4"-3"

SCG353052  
Solenoid pulse valve 2/2 NC 3/4" 230/50 quick con

- Currentless closed
- Thread or quick coupling
- Electric/air controlled
- Housing in aluminium




Product description

Specifications

Coil Material	Epoxy
Connection Thread	3/4 BSP, Compression fittings
Differential Pressure Air Max	8.5
Differential Pressure Min	0.35
Flow Factor / Flow Coefficient	14
Flow Max l/min Double	233
Function 1	2/2
Function 2	Normally Closed (SPST)
IP Class	IP65
Material Body	Aluminium
Material of seals	NBR
Material Plunger	Stainless steel
Material Short Call	Copper
Materials Spring	Stainless steel
Max. pressure	10
Membrane Material	TPE

Power Consumption	6
Temperature range from	-20
Temperature range of media from	-20
Temperature range of media to	85
Temperature range to	85
Throughput	25
Weight	0.85
Voltage AC	230

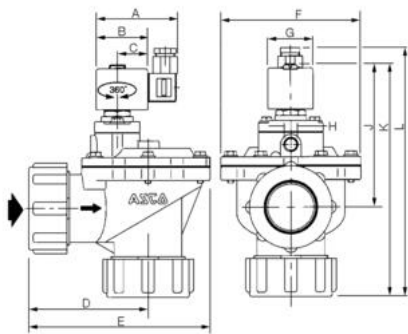

Ventil	A	B	C	D	E	F	G	H	J	K	L
SCG353052	75	45	27	88	125	75	39	-	92	175	195
SCG353053	75	45	27	88	125	75	39	-	92	175	195
SCG353065	80	50	30	117	177	136	45	3/8	131	225	242