

IDEM STANDARD TAPE DETECTOR

500011C

Belt Switch 50mm Roller M20 2NC 2NO 230v LED

- Two-step operation
- 3 types of lever rollers
- Adjustable angle of operation
- 2 independent contact blocks 1NO + 1NC



Product description


The IDEM sensor range complements a wide range of cable switches used for emergency stop along conveyors. They are mounted along the conveyor belt and indicate the crookedness of the conveyor belt. We offer standard models (aluminum alloy) and made of stainless steel. Sensors are available with different roll diameters, thus ensuring a long service life even under severe operating conditions.

Specifications

Approvals	IEC 60947-5-1
Atex approved	No
Central Material	Die cast metal
Conduit entry	4 x M20
Contacts	2NC 2NO
Integrated LED indication	Yes
IP Class	IP67
LED supply voltage	230 V
Materials Contacts	Silver
Mounting	4 x M5
Operating temperature	-25°C...+80°C
Operational rating	AC15 A300 240V. 3A. / 120V. 6A. ac, 24V. 2,5A dc
Rated insulation voltage	500V
Thermal current (Ith)	10

Utilisation category	AC15
----------------------	------

Withstand voltage	2500V
-------------------	-------

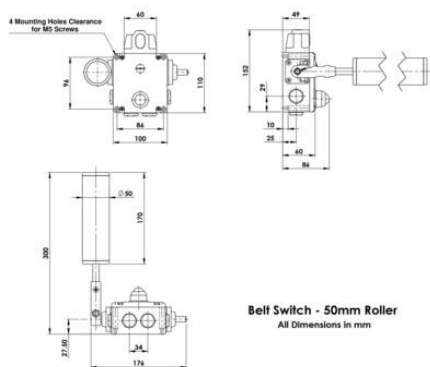

Bell Switch - 50mm Roller
All Dimensions in mm