

## DATALOGIC - VISION SENSOR DATAVS2 AOR

DATAVS2-08DEAOR

Vision Sensor, 8mm lens, ADV Object recognition, Red LED

- 360° pattern recognition
- 8 different controls
- Memory for up to 20 different inspections
- 4 outputs




### Product description

DataVS2 is a series of Vision sensors for flexible solutions for machine applications.

The sensor is complete with optics, red LED lighting and electronics in a compact housing. The parameters in the sensor are set via PC through Ethernet communication. The software comes with the sensor and is developed to lead the user step by step through parameter setting. DataVS2 is available in three different versions with different control instruments.

Advanced Object recognition AOR - Has a control instrument for 360° pattern recognition.

.Logic functions for that are connected between different control instruments and outputs such as: AND, OR, NOT, NAND, NOR etc.

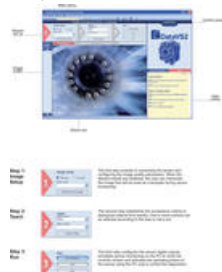

### Technical data




Supply voltage	24 V DC $\pm 10\%$
Ripple	1Vpp max. with lighting 2Vpp without lighting
Current consumption	100 mA at 24 VDC (without lighting)
Output type	4 PNP
Output current	100 mA max.
Resolution	640x480 (VGA)
Network interface	M12 4-pole Ethernet 10/100 Mbps
Interface external lighting	Strobe signal (24 V PNP N.O)
Frame rate	60 fps

<b>optics</b>	integrated (6 mm/8 mm/12 mm/16 mm)
<b>Indication</b>	4 LED
<b>Connection</b>	M12 8-pole A-coded M12 4-pole D-coded
<b>IP-class</b>	IP50
<b>Encapsulation material</b>	Aluminium alloy/ABS
<b>Weight</b>	125 g
<b>Working temperature</b>	-10 to +50 °C
<b>Storage temperature</b>	-25 to +70 °C

## Control instruments




Control	Function	Applications	Image
<b>Pattern Match</b>	Search for a sample within a specified range	<ul style="list-style-type: none"> <li>• Packaging: check of logo</li> <li>• Installation: product-orientation</li> <li>• Automation of post: stamp control</li> </ul>	
<b>Contour Match</b>	Control of form	<ul style="list-style-type: none"> <li>• Metal working: integrity check</li> <li>• Foodstuffs: control of form</li> </ul>	
<b>Position</b>	Control of limit position of the object	<ul style="list-style-type: none"> <li>• Bottling: level control</li> <li>• Foodstuffs: control of label position</li> </ul>	
<b>Width</b>	Measures the object's width	<ul style="list-style-type: none"> <li>• Installation: control of plastic parts</li> <li>• Woodworking industry: measurement of branch thickness</li> </ul>	

<b>Counting</b>	Counts number of objects along a line	<ul style="list-style-type: none"> <li>Electronics: counting components</li> <li>Pharmaceutical industry: Counting units</li> </ul>	
<b>Contrast</b>	Calculation of contrast	<ul style="list-style-type: none"> <li>Foodstuffs: checking presence of date and consignment label</li> <li>Metal working: Check of laser marking</li> </ul>	
<b>Brightness</b>	Calculation of luminance	<ul style="list-style-type: none"> <li>Bottling: checking presence of cap</li> <li>Packaging: counting objects</li> </ul>	


## Read field

### Read field


Working distance (mm)	Read field (Width x Height) in mm			
	DATAVS2-16-DE-xxx	DATAVS2-12-DE-xxx	DATAVS2-08-DE-xxx	DATAVS2-06-DE-xxx
<b>50</b>	-	17 x 12	25 x 20	42 x 30
<b>80</b>	-	25 x 20	40 x 30	60 x 41
<b>110</b>	-	33 x 25	55 x 40	80 x 55
<b>140</b>	31 x 24	45 x 35	70 x 50	98 x 69
<b>170</b>	39 x 29	53 x 38	85 x 60	118 x 83
<b>200</b>	46 x 34	60 x 50	100 x 70	138 x 92
<b>300</b>	70 x 53	90 x 65	145 x 103	201 x 140
<b>400</b>	94 x 71	121 x 82	186 x 132	265 x 189
<b>500</b>	118 x 89	150 x 110	236 x 167	330 x 232
<b>600</b>	143 x 107	185 x 130	282 x 232	385 x 270

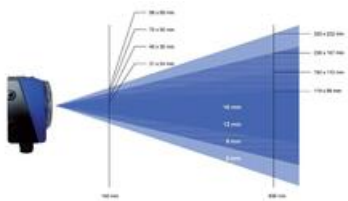

## Dimensions

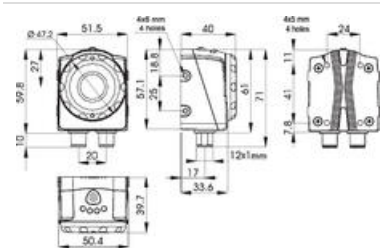

## Connection

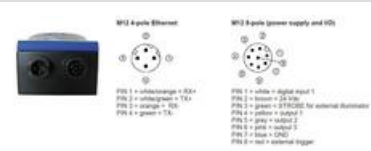

## Order number

Order number	Description	Output
DATAVS2-06DEAOR	6 mm lens, AOR	4 outputs
DATAVS2-08DEAOR	8 mm lens, AOR	4 outputs
DATAVS2-12DEAOR	12 mm lens, AOR	4 outputs
DATAVS2-16DEAOR	16 mm lens, AOR	4 outputs
DATAVSCVRJ45D03	Ethernet cable 3m	


## Download

Data sheet	<a href="#">Download</a>
Manual	<a href="#">Download</a>


## Specifications

Electrical connection	M12 4-pole D-coded, M12 8-pin connector
Format The Photo Collection	VGA mono
Frame Rate	60
Interface	Ethernet 10/100 Mbs (4-pole M12 -connector)
IP Class	IP50
Lens material	ABS plastic
Light type	Red LED
Material Protection	Aluminium
Optics	8mm integrated lens
Output	4xPNP

Output current max	0.1
Power consumption max	0.1
Resolution	640x480 (VGA)
Temperature range from	-10
Temperature range to	50
Type	Advanced object detection
Type of lens	8mm
User Interface	DAVAVS GUI
Voltage DC max	24
Voltage DC min	24
Voltage Tolerance	10%

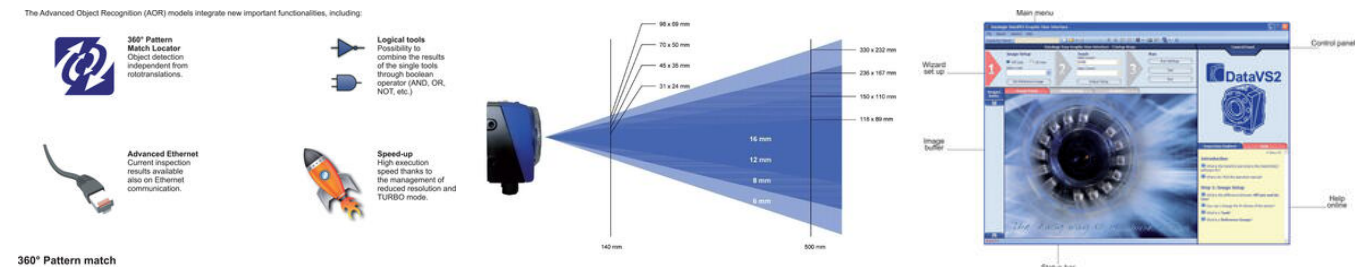

#### 360° Pattern match

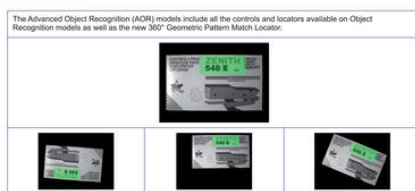

#### Step 1: Image Setup



The first step consists in connecting the sensor and configuring the image quality parameters. When the desired results are obtained, the user can memorize the image that will be used as a template during sensor functioning.

#### Step 2: Teach





The second step establishes the acceptance criteria to distinguish objects from wastes. One or more controls can be selected according to the task to carry out.


#### Step 3: Run




The third step configures the sensor digital outputs, simulates sensor functioning on the PC to verify the controls chosen and activates the operating phase on the sensor using the PC only to control the diagnosis.

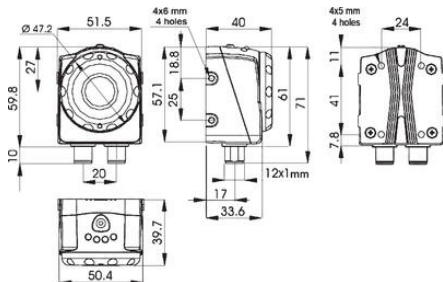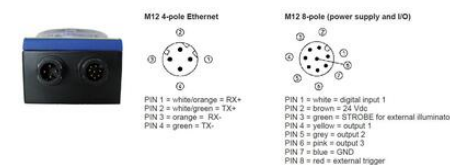


The Advanced Object Recognition (AOR) models integrate new important functionalities, including:

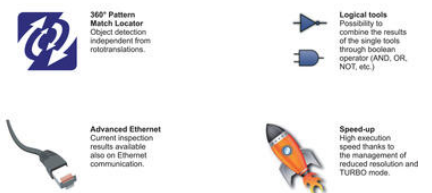

#### 360° Pattern match

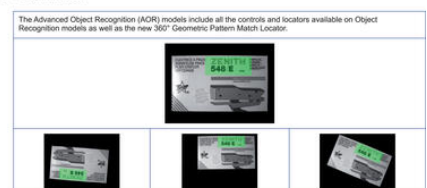

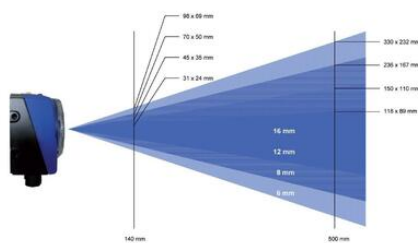

M12 4-pole Ethernet



PIN 1 = white/orange = RX+  
PIN 2 = white/green = TX+  
PIN 3 = orange = RX-  
PIN 4 = green = TX-

M12 8-pole (power supply and I/O)



PIN 1 = white = digital input 1  
PIN 2 = brown = 24 Vdc  
PIN 3 = green = STROBE for external illuminator  
PIN 4 = yellow = output 1  
PIN 5 = grey = output 2  
PIN 6 = pink = output 3  
PIN 7 = blue = GND  
PIN 8 = red = external trigger

#### Step 1: Image Setup



The first step consists in connecting the sensor and configuring the image quality parameters. When the desired results are obtained, the user can memorize the image that will be used as a template during sensor functioning.

#### Step 2: Teach



The second step establishes the acceptance criteria to distinguish objects from wastes. One or more controls can be selected according to the task to carry out.

#### Step 3: Run



The third step configures the sensor digital outputs, simulates sensor functioning on the PC to verify the controls chosen and activates the operating phase on the sensor using the PC only to control the diagnostics.

