

A2A2840-14GMUV



## Product description




### Specifications

<b>3612_Pixel size (µm)</b>	2.74 x 2.74
<b>Approvals</b>	CE, EAC, FCC, GigE Vision, RoHS, UL
<b>Digital Inputs</b>	1
<b>FPGA</b>	Yes
<b>Frame Rate Max</b>	14
<b>Height</b>	29
<b>IP Class</b>	IP30
<b>Length</b>	55.5
<b>Lens Barrel</b>	C-Mount
<b>Mono/Color</b>	Mono
<b>Operating temperature</b>	0°C ... 50°C
<b>Pixel Beyond</b>	Yes
<b>Power Consumption</b>	3.2
<b>Resolution Max</b>	2840 x 2840 px
<b>Sensor model</b>	IMX487
<b>Sensor size</b>	2/3"
<b>Sensor supplier</b>	Sony
<b>Shutter type</b>	Global

**Wave-Length** UV

**Weight** 100

**Width** 29

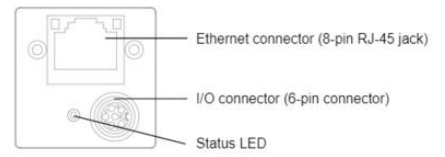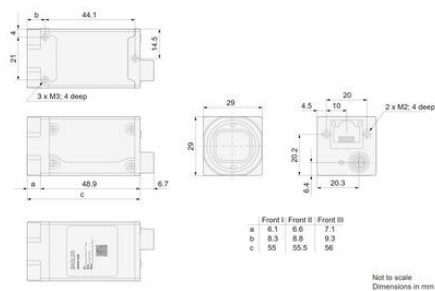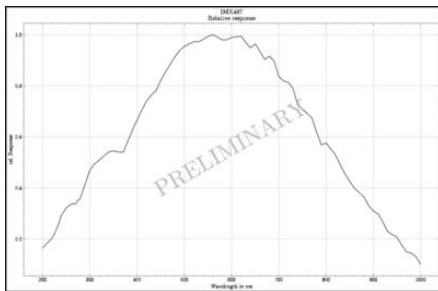

Pin	Line	Function
1	-	12-24 VDC camera power
2	Line 1	Opto-coupled I/O input line
3	-	Ground for opto-coupled I/O lines
4	Line 2	General purpose I/O (GPIO) line
5	Line 3	General purpose I/O (GPIO) line
6	-	Ground for camera power and General Purpose I/O (GPIO) lines

