

## MOLEX - MPM M8/M12-DIN A / DIN B INDUSTRIAL MOULDED CABLE CONNECTORS

E850B0P12M020R

Cordset DINA-M12 str. male LED+VDR 2m PUR

- Fully overmoulded for better protection
- Quick and simple installation with M8 and M12
- With or without LED and transient protection
- EN175301-803 (DIN43650)-M8 / M12




### Product description

DIN Valve Connectors with moulded cable, IP65 rated. IP67 version available on request.

### Specifications

<b>Cable length</b>	2 m
<b>Circuit</b>	C4: LED & varistor
<b>Color Cable</b>	Black
<b>Colour LED</b>	Yellow
<b>Connection male</b>	M12
<b>Cross-Section</b>	0.5
<b>Current max</b>	3
<b>Head 2</b>	DIN
<b>IP Class</b>	IP65
<b>Isolation Outer</b>	PUR
<b>LED indicator</b>	Yes
<b>Material Cable</b>	PUR
<b>Rated Voltage</b>	24
<b>Temperature Range Flexible Use Of</b>	-15
<b>Temperature Range For Flexible Use</b>	90
<b>Temperature Range The Use Of</b>	-40
<b>Voltage AC / DC Max</b>	250

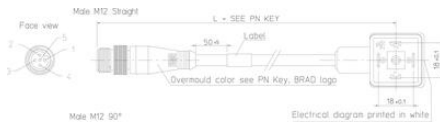

**M12**

**DIN C4**

