

## MOLEX - MPM DIN C INDUSTRIAL / DIN C OVERMOULDED CABLE

392N2N30011C4H  
Form Micro, 2P+Earth, H03 PVC, 3m Length, C4, 24V, Yellow

- Fully overmoulded providing a high level of protection
- Quick and simple installation
- With or without LED and transient protection
- 9.4 mm or 8 mm contact distance EN175301-803 (DIN43650-C Industrial/-C)




### Product description

DIN Valve Connectors with moulded cable, IP65 rated. IP67 version available on request. Conforms to EN 175301-803.

### Specifications

<b>Cable diameter</b>	5,4mm
<b>Cable length</b>	3 m
<b>Circuit</b>	C4: LED & varistor
<b>Colour LED</b>	Yellow
<b>Connector</b>	DIN C micro 94mm
<b>Cross-Section</b>	0.5
<b>Current max</b>	3
<b>IP Class</b>	IP65
<b>LED indicator</b>	Yes
<b>Manufacturer Part No</b>	1210500177
<b>Material Cable</b>	PVC
<b>Number of poles</b>	2 + earth
<b>Packing Materials</b>	NBR
<b>Rated voltage</b>	24 V AC/DC
<b>Screw size</b>	M3x20
<b>Temperature range from</b>	-40
<b>Temperature range to</b>	90

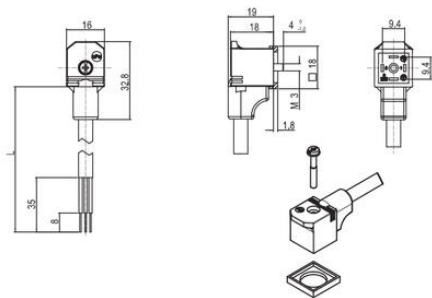

**V ac-dc**

