MOLEX - MPM DUAL DIN OVERMOULDED CABLE

653P3NE501PC4H

- Dual function from a single cable
- Quick and simple installation
- EN175301-803 (DIN43650)-A/ISO4400

Product description

Specifications

Circuit	C4: LED & varistor
Color Cable	Black
Colour LED	Yellow
Connector	DINA 43650
Cross-Section	0.75
Current max	5
IP Class	IP65
Isolation Internal	PVC
Isolation Outer	PUR
Temperature Range Flexible Use Of	-15
Temperature Range For Flexible Use	90
Temperature Range The Use Of	-40
Voltage AC / DC Max	24

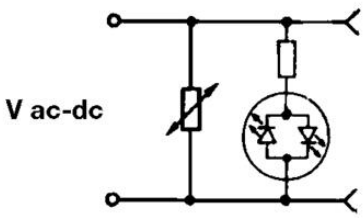

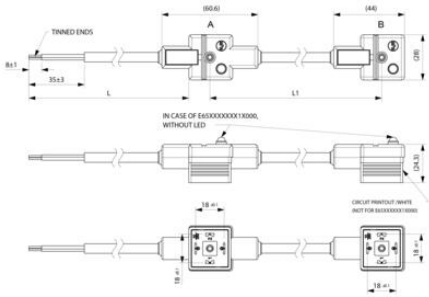

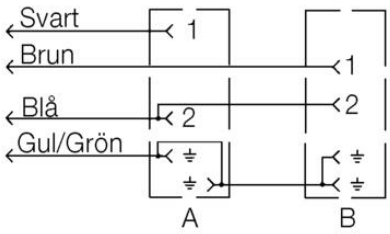

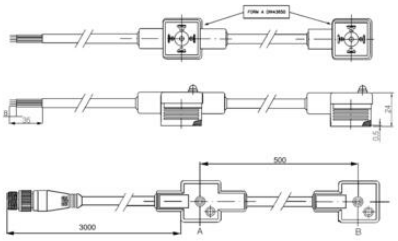
FLRW x 2mx300
30
24
500
3000
A
B