SIGNAL TOWER Ø 70MM ECO

ECOmodul70 series

900022405
LED Flashing, Red, 24 V ac/dc, XDA



- Modular signal tower
- Integrated LED or filament bulb
- Wide control voltage range

PRODUCT DESCRIPTION

Complete range of bright LED modules in function modes LED steady light LED flashing light LED strobe light (single flash) LED multi strobe light (multi flash) LED steady/LED strobe and LED multi strobe modules Very long lifetime due to maintenance free LED technique, vibration proof and significantly reduced nominal current Piezo buzzer and multi tone siren modules Easy to wire connections Comprehensive range of mounting options including quick mount solutions Plc fit (leakage and inrush current) High ingress protection IP 66 certified to UL type 4/4X/13

SPECIFICATIONS

Color Lens	Red
Diameter	70
Flash Frequency	2
IP Class	IP66
Nominal current max	0.058
Nominal current min	0.058
Number Of Optional Modules	2
Operating Voltage AC / DC Max	26.4
Supply Voltage	24
Supply Voltage AC / DC Min	21.6
Temperature range from	-30
Temperature range to	60
Weight	100

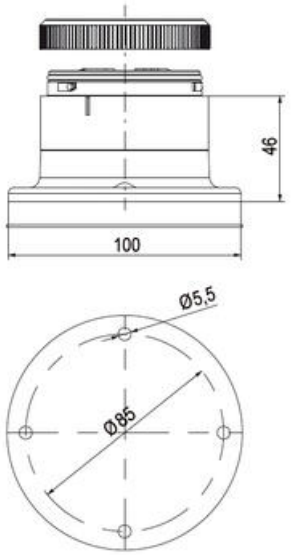
46
100
Ø5,5
Ø85

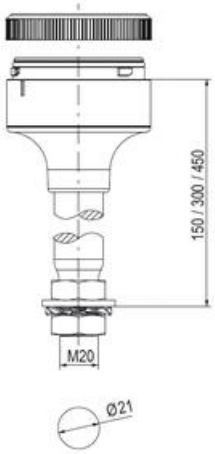
150 / 300 / 450
M20
Ø21

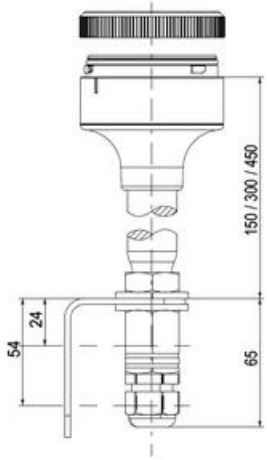
150 / 300 / 450
24
54
65

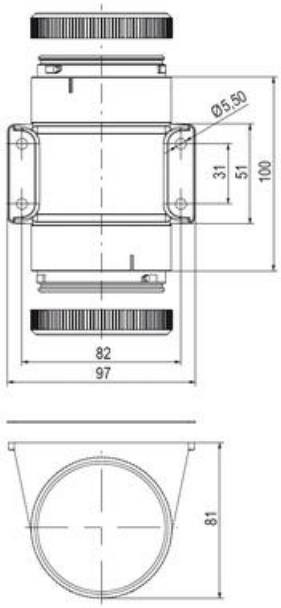
Ø5,50
31
51
100
82
97

81


61
73


74
73

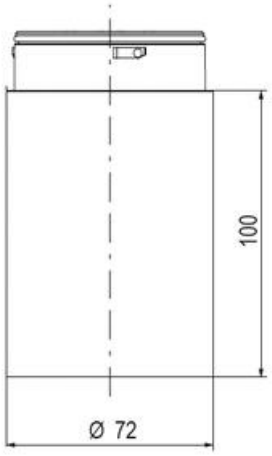
100
Ø 72

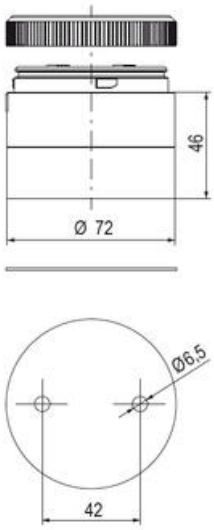
46
Ø 72
Ø6,5
42

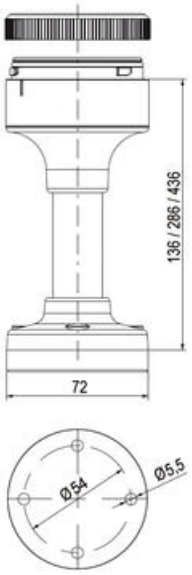
136 / 286 / 436
72
Ø54
Ø5,5

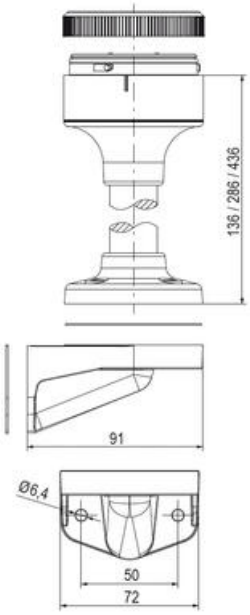
136 / 286 / 436
91
Ø6,4
50
72

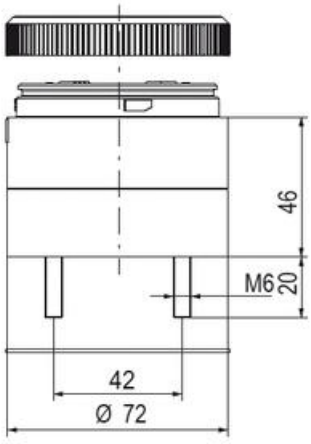
46
M6
20
42
Ø 72


70
Ø 72

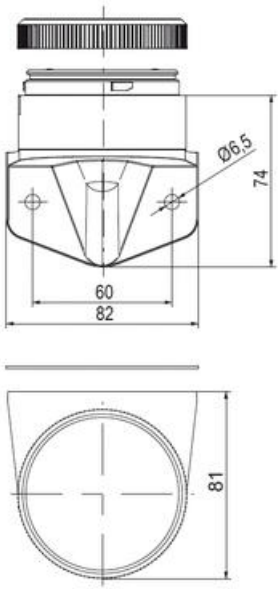
Ø6,5
74
60
82
81

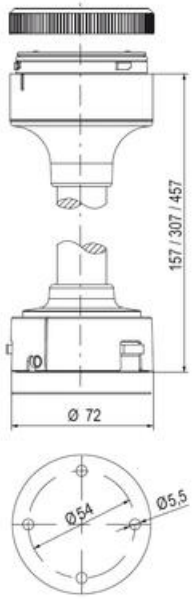
157 / 307 / 457
Ø 72
Ø54
Ø5,5

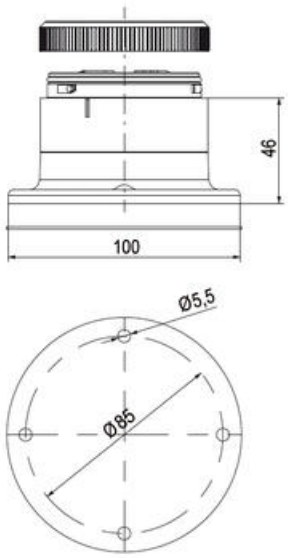
46
100
Ø5,5
Ø85

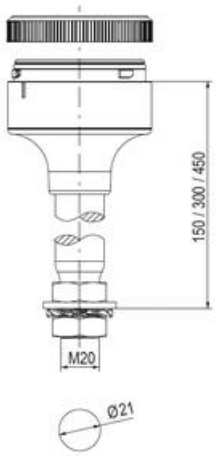
150 / 300 / 450
M20
Ø21

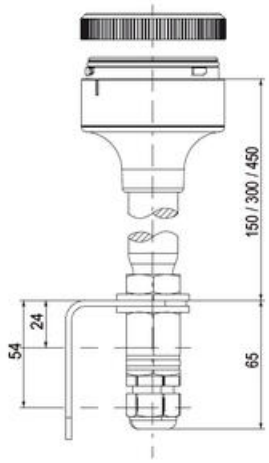
150 / 300 / 450
24
54
65

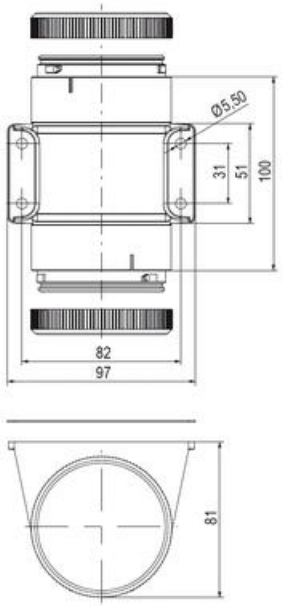
Ø5,50
31
51
100
82
97
81


61
73


74
73

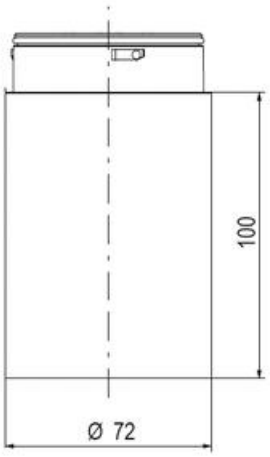
100
Ø 72

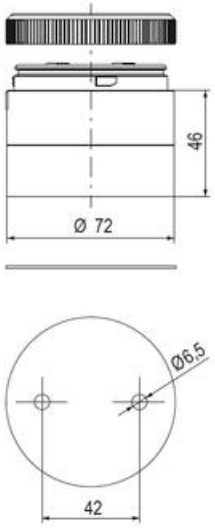
46
Ø 72
Ø6,5
42

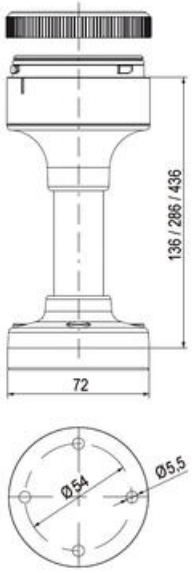
136 / 286 / 436
72
Ø54
Ø5,5

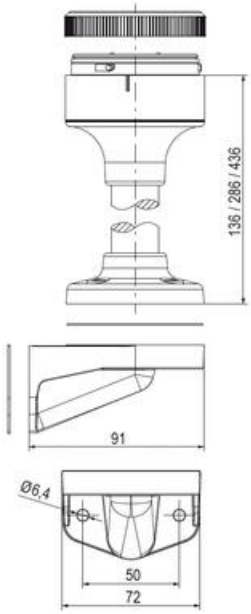
136 / 286 / 436
91
Ø6,4
50
72

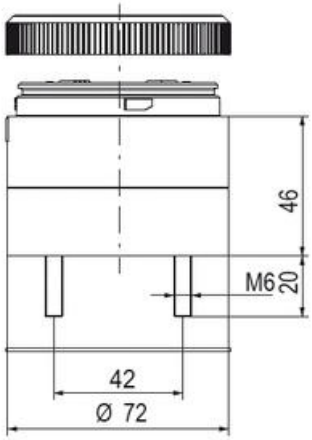
46
M6
20
42
Ø 72


70
Ø 72

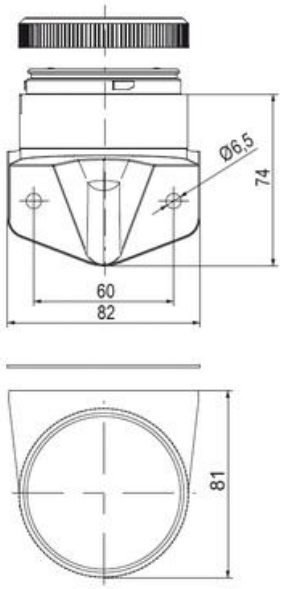
Ø6,5
74
60
82
81

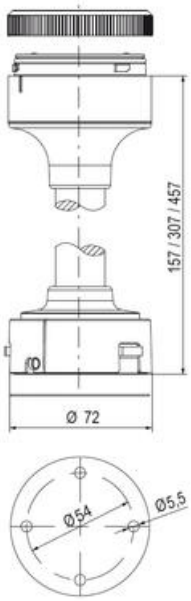
157 / 307 / 457
Ø
Ø 72

Ø54
Ø5,5